

Eaton / Bezares Series PTO Catalog

Pro Gear and Transmission presents the Eaton / Bezares series PTO manual to assist in identifying your the correct PTO for your vehicle and application.

If you need any assistance identifying the correct parts for your truck and equipment, contact your Eaton / Bezares specialists at Pro Gear and Transmission.

We are a powerhouse supplier of Power Take Off Units (PTO's). Our parts department carries just about every PTO for every heavy duty truck ever built and can locate any hard to find transmission, differential, transfer case, or PTO for you quickly. Our technicians are available to answer any question you may have even if you did not buy your unit or part from us. In a hurry, order direct from our store!

Pro Gear Transmission has same day shipping and 1000’s of products in stock and ready to ship internationally for your next project. For parts or service contact the Eaton / Bezares specialists at Pro Gear & Transmission, Inc.

1 (877) 776-4600
(407) 872-1901
parts@eprogear.com

Check Inventory | Email Us | Call Us

bezaresusa

Building our world

PTO Application Catalog



PTOs

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Index

Cross Reference 13

Series 14
Options 15
Gear Ratio 16
Output 17
Input Gear 18
Assembly 20
Shifter 21

PTO Series 23

1000 24
2000 28
3000 32
3131 35
3131RP 38
3190 40
3151 43
3200 46
3252 49
3300 52
3800 55
3900 58
3920 60
3940 62
4100 & 4110 65
4250 68
6000 71
6800 74
8000 77
8500 80
95 83
120X13DSB 85
AD_ _ _ 87
AD-622 89
AD-68248 90
Tech. Info 91

PTO Application 95

Aisin Index 97

450-43LE 98
A443 98
A443E 98
A445 98
A460 99
A465 98
A860E (Hino) 99
AS68RC 99
AS69RC 99
AX45X2 98
MO35A4 98
MO36A6 98
MY600 98

Allison Index 101

1000 102
1000 EVS 102
1000 MH 102
1000 RDS 102
2000 102
2100 EVS 102
2100 MH 102
2100 RDS 102
2200 EVS 102
2200MH 102
2200 RDS 102
2300 RDS 102
2400 102
2500 EVS 102
2500 MH 102
2500 RDS 102
3000 EVS 103
3000 MH 103
3000 RDS 103
3000 TRV 103
3200 TRV 103
3500 EVS 103
3500 RDS 103
4000 EVS 104
4000 MH 104
4000 RDS 104
4000 TRV 104
4500 EVS 104
4500 RDS 104
4700 EVS 104
4700 OFS 104
4700 RDS 104
4800 EVS 104
AT-540 105
AT-542 105
AT-543 105
AT-545 105
B210 102
B220 102
B300 103
B400 103
B500 104
CLBT-750 106
CLBT-750(OPT.8BOLT) 109
CLBT-754 106
CLT-750 106
CLT-750(OPT.8BOLT) 109
CLT-9485 108
CLT-9880 108
CLT-9884 108
CLT-9885 108
HD-4060P 104
HD-4070P 104
HD-4560P 104
HT-740CRD 106
HT-740D 106
HT-740D(OPT.8BOLT) 109
HT-740DRD 106
HT-740T 106
HT-750CRD 106
HT-750CRD(OPT.8BOLT) 109
HT-750D 106
HT-750DP 106
HT-750DRD 106
HT-750DRD(OPT.8BOLT) 109
HT-750DT 106
HT-750HT 106
HT-750T 106
HT-754CR 106
HT-754CR(OPT.8BOLT) 109
M-5600 105
M-5610 105
M-6600 105
M-8610 108
M-9600 108
M-9800 108
MD-3060P 103
MD-3060P W/ Top opening 107
MD-3066P 103
MD-3066P W/ Top opening 107
MD-3070PT 103
MD-3560P 103
MD-3560P W/ Top opening 107
MT-640 108
MT-643 108
MT-644 108
MT-644CR 108
MT-647 108
MT-648 108
MT-650 108
MT-653 108
MT-653DR 108
MT-654 108
S-5600 105
S-6600 105
S-8610 108
S-9600 108
S-9800 108

Chevrolet 111

CH-465 111
GM-20 111
M-20 111
SM-465 111

Eaton Endurant Index 113

EDX-16F118D 115
EDX-18F118D 115
EDXP-16F118D 115
EDXP-18F118D 115
EDXP-20F118D 115
EEO-14F112C 114
EEO-15F112C 114
EEO-16F112C 114
EEO-17F112C 114
EEO-18F112C 114

PO-14F112C 114
PO-15F112C 114
PO-16F112C 114
PO-17F112C 114
PO-18F112C 114
PXD-16F118D 115
PXD-18F118D 115
PXDP-16F118D 115
PXDP-18F118D 115

Eaton Fuller Index 117

4106 DT A (Rear opening) 120
4106 DT B (Rear opening) 120
4106 OD 121
AT-1202 214
EH-6E606A-CD 168
EH-8E306A-CD/T/U/UP/UPG 168
ESO-9306A F-5405B-DM3 168
ET-16109 226
ET-16110 226
ET-16113 227
ET-18109 226
ET-18110 226
ET-18113 227
ET-20109 226
ET-20110 226
ET-20113 227
ETS-16409 226
ETS-16410 226
ETS-16413 227
ETS-18409 226
ETS-18410 226
ETS-18413 227
ETS-20409 226
ETS-20410 226
ETS-20413 227
F-5405-DM3 144
F-5406B-DM3 228
F-5505B-DM3 168
F-6405B-DM3 168
F-6406N-ASW 144
F-6406N-ASX 144
F-6406N-AW3 144
F-8405B-DM3 168
F-8406N-ASW 144
F-8406N-AW3 144
FAM-14810B 173
FAM-15810B 173
FAO-11810C 189
FAO-12810C 189
FAO-13810C 189
FAO-14810C 189
FAO-15810C 189
FAO-16810C 189
FAOM-14810C 189
FAOM-15810C 189
F-LO-15410C-T2 164
FM-14D310B-LST 170
FM-14E310B-LAS 170
FM-15D310B-LST 170
FM-15E310B-LAS 170
FO-6E318B-MXP 183
FO-10E310C-VAS 183
FO-12E310C-VAS 183
FO-14E308LL-VCS 217
FO-14E309ALL-VMS 183
FO-14E310C-LAS/VAS 183
FO-14E313A-MHP 183
FO-14E318B-MXP/VXP 183
FO-16E308LL-VCS 217
FO-16E309ALL-VMS 183
FO-16E310C-LAS/VAS 183
FO-16E313A-MHP 183
FO-16E313B-MHP 183
FO-16E318B-MXP/VXP 183
FO-18E310C-LAS 183
FO-18E313A-MHP 183
FO-18E318B-MXP/VXP 183
FO-20E313A-MHP 183
FO-20E318B-MXP/VXP 183
FO-22E318B-MXP/VXP 183
FO-5406B-DM3 228
FO-5506B-DM3 168
FO-6406A-ASW 228
FO-6406A-ASX/AW3 224
FO-6406B-DM3 168
FO-6406N-AW3 144
FO-6506B-DM3 168
FO-8406A-ASW 228
FO-8406A-ASX/AW3 224
FO-8406B-DM3 168
FOM-14E310C-LAS/VAS 183
FOM-15E310C-LAS/VAS 183
FOM-16E310C-LAS/VAS 183
FR-9210 165
FR-9210B 165
FR-11210B 165
FR-12210B 165
FR-13210B 165
FR-14210B 165
FR-15210B 165
FRLO-14410C/C-T2 164
FRLO-15410C 164
FRLO-16410C/C-T2 164
FRLO-18410C-T2 164
FRO-9210B 207
FRO-11210B 207
FRO-11210C 201
FRO-12210B 207
FRO-12210C 201
FRO-13210B 207
FRO-13210C 201
FRO-14210B 207
FRO-14210C 201
FRO-15210B 207
FRO-15210C 201
FRO-16210B 207
FRO-16210C 201
FRO-17210C 201
FRO-18210C 201
FRW-15210B 165
FS-3005A (1988 & Before) 124
FS-3005A (1989 & After) 125
FS-3005B (1988 & Before) 141
FS-3005B (1989 & After) 142
FS-3005C 143
FS-3205A 125
FS-3205B 142
FS-3205C 143
FS-4005A (11/87 & After) 125
FS-4005A (Before 11/87) 124
FS-4005B (11/87 & After) 142
FS-4005B (Before 11/87) 141
FS-4005C 143
FS-4205A 125
FS-4205B 142
FS-4205C 143
FS-5005A 126
FS-5005B 148
FS-5005C 149
FS-5005D 126
FS-5106A 140
FS-5205A 126
FS-5205B 148
FS-5205C 149
FS-5206A (Rear opening) 120
FS-5206B (Rear opening) 120
FS-5306A/X 140
FS-5406A 140
FS-5406N 144
FS-5506 122
FS-6005A 129
FS-6005B 130
FS-6105A 129
FS-6105B 130
FS-6106/A 122
FS-6205A 129
FS-6205B 130
FS-6206A 140
FS-6305A 129
FS-6305B 130
FS-6306A/B 140
FS-6306X 140
FS-6406A/B 140
FS-6406N 144
FS-6406N-ASW 144
FS-6406N-ASX 144
FS-6406N-AW3 144
FS-7206A 122
FS-8206A 122
FSB-5305D 127
FSB-5406B 140
FSB-6406B 140
FSBO-6406B 168
FSBO-8406B 168
FSM-5005E 128
FSM-5005H 150
FSM-5005J 151
FSM-5305E 128
FSM-5305H 150
FSO-5206B 121
FSO-6406A 168
FSO-8406A 168
FTS-16108LL 226
FTS-16109A 226
FTS-16112L 227
FTS-18108LL 226
FTS-18109A 226
FTS-18112L 227
FTS-20108LL 226
FTS-20109A 226
FTS-20112L 227
RT-610 182
RT-613 182
RT-906 173
RT-909A 173
RT-910 173
RT-915 173
RT-1110 173
RT-6609A 179
RT-6610 182
RT-6613 182
RT-7608LL 179
RT-7609 182
RT-8606L 152
RT-8608L 152
RT-8609 179
RT-8709B 173
RT-8908LL 173
RT-9109A-AT 176
RT-9508 152
RT-9509A/C 173
RT-9513 173
RT-9710B 173
RT-11109A-AT 176
RT-11209H 165
RT-11210B 165
RT-11509 173
RT-11608 152
RT-11609A/H 173
RT-11610 173
RT-11613 173
RT-11615 173
RT-11709H 173
RT-11710B 173
RT-11715 173
RT-12109A-AT 176

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RT-12209H 165
RT-12210B 165
RT-12509 173
RT-12510 173
RT-12513 173
RT-12515 173
RT-12609A/H 173
RT-12610 173
RT-12709A/H 173
RT-12710B/B-AS2 173
RT-13209H 165
RT-13210B 165
RT-13609A/H 173
RT-13709H 173
RT-13710B 173
RT-14109A-AT 176
RT-14209H 165
RT-14210B 165
RT-14608 152
RT-14609A/H 173
RT-14610 173
RT-14613 173
RT-14615 173
RT-14709A/H 173
RT-14710B/B-AS2 173
RT-14715 173
RT-14910B-AS2 173
RT-14915 173
RT-15613 173
RT-15615 173
RT-15715 173
RTA-14710B-AS 173
RTAO-10710B-AC/AS 220
RTAO-10710C-AC/AS 186
RTAO-12710B-AC/AS 220
RTAO-12710C-AC/AS 186
RTAO-14710B-AC/AS 220
RTAO-14710C-AC/AS 186
RTAO-16710B-AC/AS 220
RTAO-16710C-AC/AS 186
RTF-906 173
RTF-906A 173
RTF-909A 173
RTF-910 173
RTF-915 173
RTF-8908LL 173
RTF-9509A 173
RTF-9513 173
RTF-11609A 173
RTF-11613 173
RTF-12509 173
RTF-12510 173
RTF-12515 173
RTF-12609A 173
RTF-12709H 173
RTF-12710B 173
RTF-13609A 173
RTF-13709H 173
RTF-13710B 173
RTF-14609A 173
RTF-14613 173
RTF-14709H 173
RTF-14710B 173
RTF-14715 173
RTF-14915 173
RTF-15715 173
RTL-11710B/B-T2 173
RTL-12710B/B-T2 173
RTL-13710B 173
RTL-13710B-T2 173
RTL-14710B/B-T2 173
RTLC-16609A/E 186
RTLC-16613A/E 186
RTLO-9118A-MT 173
RTLO-11610B/B-T2 173
RTLO-12610B/B-T2 173
RTLO-12613B 173
RTLO-12713A 186
RTLO-12913A 186
RTLO-13118AMT 186
RTLO-13610B/ B-AS/B-T2 173
RTLO-14610A/B/B-T2 173
RTLO-14613A/B 173
RTLO-14618A 173
RTLO-14713A/A-T2 186
RTLO-14718B/B-T2 186
RTLO-14913A/A-T2 186
RTLO-14918A-AS2/S3 186
RTLO-14918B/B-AS/ B-AS3/B-T2 186
RTLO-15610B/B-T2 173
RTLO-16610B/B-T2 173
RTLO-16618A 173
RTLO-16713A/A-MT/ A-T2 186
RTLO-16718B/B-T2 186
RTLO-16913L-DM3 183
RTLO-16913-LHS-D 186
RTLO-16913-T2/A/A-T2/L-LHP 186
RTLO-16918A-AS2/-AS3 186
RTLO-16918B/B-AS/B-T2 186
RTLO-17610B/B-T2 173
RTLO-18610B/B-T2 173
RTLO-18718B/B-T2 186
RTLO-18913A/A-T2 186
RTLO-18918A-AS2/-AS3 186
RTLO-18918B/B-AS/B-T2 186
RTLO-20718B/B-T2 186
RTLO-20913A/A-AS2 186
RTLO-20918A-AS3 186
RTLO-20918B/B-AS/B-T2 186
RTLO-22918A/A-AS2/A-AS3 186
RTLO-22918B/B-AS 186
RTLOC-16909A/A-T2 186
RTLOC-18909A/A-T2 186
RTLOF-14618A 174
RTLOF-14618A 175
RTLOF-14718B 186
RTLOF-14918B 186
RTLOF-16618A 174
RTLOF-16618A 175
RTLOF-16718B 186
RTLOF-16918B 186
RTLOF-18718B, 186
RTLOF-18918B 186
RTLOF-20918B 186
RTLOF-22918B 186
RTLOFC-16909A/A-T2 186
RTLOM-16913L-DM3 183
RTLOM-16913L-LH 186
RTO-610 213
RTO-613 213
RTO-909A 220
RTO-909B 186
RTO-910 204
RTO-913 173
RTO-915 204
RTO-958LL 220
RTO-1110 210
RTO-1157DL/DLL 195
RTO-1213 173
RTO-1258LL 220
RTO-6610 213
RTO-6613 213
RTO-7613 213
RTO-9109A-AT 222
RTO-9109B-AT 192
RTO-9509A 220
RTO-9509B 186
RTO-9513 173
RTO-10710B-AS/AS2 220
RTO-10910B-AS2/AS3 220
RTO-10910B-DM2/DM3 217
RTO-11109A-AT 222
RTO-11109B-AT 192
RTO-11209B/H 207
RTO-11210B 207
RTO-11210C 201
RTO-11210R 201
RTO-11509 220
RTO-11607L/LL 198
RTO-11608LL 220
RTO-11609A 220
RTO-11609B/H 186
RTO-11609P/R 215
RTO-11610 210
RTO-11613 173
RTO-11615 210
RTO-11707DLL 198
RTO-11707LL 198
RTO-11708LL 220
RTO-11709B/H/MLL 186
RTO-11710B 220
RTO-11710C 186
RTO-11715 210
RTO-11813 173
RTO-11908LL 220
RTO-11909ALL/MLL 186
RTO-12109A-AT 222
RTO-12109B-AT 192
RTO-12209B/H 207
RTO-12210B 207
RTO-12210C 201
RTO-12210R 201
RTO-12509 220
RTO-12510 210
RTO-12513 173
RTO-12515 210
RTO-12609A 220
RTO-12609B/H 186
RTO-12609P/R 215
RTO-12610 210
RTO-12709H 186
RTO-12710B/B-AS2 220
RTO-12710C 186
RTO-12910B-AS2/AS3 220
RTO-12910B-DM2/DM3 217
RTO-13109A-AT 222
RTO-13109B-AT 192
RTO-13209B/H 207
RTO-13210B 207
RTO-13210C 201
RTO-13210R 201
RTO-13609A 220
RTO-13609B/H 186
RTO-13609P/R 215
RTO-13707DLL/MLL 198
RTO-13709H 186
RTO-13710B 220
RTO-13710C 186
RTO-14109A-AT 222
RTO-14109B-AT 192
RTO-14209B/H 207
RTO-14210B 207
RTO-14210C 201
RTO-14210R 201
RTO-14608LL 220
RTO-14609A 220
RTO-14609B/H 186
RTO-14609P/R 215
RTO-14610 210
RTO-14610C 186
RTO-14613 173
RTO-14615 210
RTO-14708LL 220
RTO-14709A 220
RTO-14709H/MLL 186
RTO-14710B/B-AS2 220
RTO-14710C/C-AS2 186
RTO-14713 173

RTO-14715 210
RTO-14813 173
RTO-14908LL 220
RTO-14909ALL/MLL 186
RTO-14910B/B-AS2/B-AS3 220
RTO-14910B-DM2/DM3 217
RTO-14910C/C-AS2/C-AS3 186
RTO-14915 210
RTO-15210B 207
RTO-15210C 201
RTO-15613 173
RTO-15615 210
RTO-15618 173
RTO-15708LL 220
RTO-15710B 220
RTO-15710C 186
RTO-15715 210
RTO-15813 173
RTO-16109A-AT 222
RTO-16109B-AT 192
RTO-16210B 207
RTO-16210C 201
RTO-16709B/H 186
RTO-16710B/B-AS2 220
RTO-16710C&C-AS2 186
RTO-16715 210
RTO-16908LL 220
RTO-16909ALL 186
RTO-16910B/B-AS/B-AS2/B-AS3 220
RTO-16910B-DM2/DM3 217
RTO-16910C-AS2/C-AS3 186
RTO-16915 210
RTO-18910B-AS2/AS3 220
RTOC-16709A 186
RTOC-16909A 186
RTOC-16913A 186
RTOC-18909A 186
RTOCM-16909A 186
RTOF-909A 220
RTOF-910 204
RTOF-915 204
RTOF-9509A 220
RTOF-9509B 186
RTOF-9513 173
RTOM-16910B-DM3 217
RTOO-9513 186
RTOO-11613 186
RTOO-14613 186
RTOX-11609A 220
RTS-11909A 226
RTS-11912L 227
RTX-11609A 220
RTX-11609B 186
RTX-11609P/R 215
RTX-11708LL 220
RTX-11709H 186
RTX-11710B 220
RTX-11710C 186
RTX-12609B 186
RTX-12609P/R 215
RTX-12709H 186
RTX-12710B 220
RTX-12710C 186
RTX-13609B 186
RTX-13609P/R 215
RTX-13709H 186
RTX-13710B 220
RTX-13710C 186
RTX-14609A 220
RTX-14609B 186
RTX-14609P/R 215
RTX-14708LL 220
RTX-14709H 186
RTX-14710B 220
RTX-14710C 186
RTX-14715 210
RTX-15710B 220
RTX-15710C 186
RTX-15715 210
RTX-16709B/H 186
RTX-16710B 220
RTX-16710C 186
T-905A/B/H/P 145
T-905C/J 137
T-905D/M 158
T-905F 130
T-955AL/ALL 145
T-955GL 173
T-8607A/B 133
T-11605A/B 145
T-11605C 137
T-11605D/M 158
T-11605F 130
T-11606 133
T-11607A/B 133
T-14607A/B 135
TO-905A/D 195
TO-905B 161
TO-905C 155
TO-955AL/ALL/DLL 195
TO-955LL 220
TO-11605A 198
TO-11605B 161
TO-11605C 155
TO-11605D 195
TO-11607B-ASX 169
TO-14607B-ASX 169
TS-11612A 133
TS-12612A 133
TS-13612A 133
TS-15612A 133
TS-16612A 133
TSO-11612A 133
TSO-12612A 133
TSO-13612A 133
TSO-15612A 133
TSO-16612A 133
TX-8607B 169
TX-14607B 169

Ford // 229

5R110W Torqshift 4X2 & 4X4 (Diesel 2003-2004) 229
5R110W Torqshift 4X2 (2005 & Later) 229
6R140 Torqshift 4x2 OR 4x4 (2011 & Later - Diesel only) 229
10R140 Torqshift 10 Speed (2020 & Later) 229

Mack Index // 230

107 231
1070 233
1071 233
1076 233
1078 233
2090 241
10760 233
10780 233
D-107 251
T-3 10ME Rear 237
T-3 10ME Rear 238
T-3 10MLR Rear 237
T-3 10MLR Rear 238
T-3 10M Rear 237
T-3 10M Rear 238
T-105A 235
T-107 251
T-305 247
T-306 247
T-307 Front 247
T-307M Front 247
T-307M Rear 249
T-307 Rear 249
T-308 247
T-308M Front 247
T-308M Rear 249
T-309 241
T-309L 241
T-309LR 241
T-310 242
T-310ME Front 242
T-310M Front 242
T-310MLR Front 241
T-313 Front 241
T-313L21 Front 241
T-313L21 Rear 246
T-313L Front 241
T-313LR21 Front 241
T-313LR21 Rear 246
T-313L Rear 246
T-313LR Front 241
T-313LR Rear 246
T-318 Front 241
T-318L21 Front 241
T-318L21 Rear 246
T-318L Front 241
T-318LR21 Front 241
T-318LR21 Rear 246
T-318L Rear 246
T-318LR Front 241
T-318LR Rear 246
T-1060A 235
T-1070 255
T-1070B 255
T-2050 247
T-2050C 248
T-2060 247
T-2060C 248
T-2070A Front 247
T-2070A Rear 249
T-2070B Front 247
T-2070B Rear 249
T-2070C Front 248
T-2070C Rear 249
T-2070D Front 248
T-2070D Rear 249
T-2070F 247
T-2070 Front 247
T-2070 Rear 249
T-2080 247
T-2080B Front 247
T-2080B Rear 249
T-2080C 248
T-2080D Front 248
T-2080D Rear 249
T-2090 241
T-2090L 241
T-2110B Rear 236
T-2130B Front 241
T-2130B Rear 244
T-2130 Front 241
T-2130 Rear 244
T-2180B Front 241
T-2180B Rear 244
T-2180 Front 241
T-2180 Rear 244
T-31321 Front 241
T-31821 Front 241
TM-308 243
TM-308M Front 241
TM-308M Rear 239
TM-309 243
TM-309M Front 241
TM-309M Rear 239
TMD-12AD 256
TMD-12AFO 257
TMD-12AO 257
TMD-12AO-HD 257

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

TMD-12AO-HDX 257
TMD-14AFO-HDX 257
TMD-3112 257
TRDL-107 251
TRDL-1070 255
TRDLG-1070 255
TRDXL-107 233
TRDXL-1070 233
TRDXL-1071 233
TRDXL-1078 233
TRDXL-10780 233
TRDXL-10781 233
TRL-107 231
TRL-1076 233
TRL-1078 233
TRL-10760 233
TRL-10780 233
TRTXL-107 251
TRTXL-1070 255
TRTXL-1070B 255
TRX-107 251
TRXL-107 251
TRXL-107A 251
TRXL-1070 253
TRXL-1070A 253
TRXL-1071 251
TRXL-1071A 251
TRXL-1076 233
TRXL-1078 251
TRXL-10710 253
X-107 251
X-107A 251
X-1070 253
X-1070A 253
X-1071 251
X-1071A 251
X-10710 253
X-10710A 253

Mercedes Index 259

G2/24-5/6.71 270
G2/24-5/7.31 269
G3 36-5/8.98 260
G3 40-5/7.508 263
G3 45-6/8.5 262
G3 50-5/8.5 261
G3 55-6/8.5 262
G3 60-5/5.4 266
G3 60-5/6.106 265
G3 60-5/7.5 263
G3 61-5/6.1 265
G3 65-8/9.29 266
G3 65-9/13.36 266
G3 90-8/9.29 266
G3 90-9/13.36 266
G4 65-6/9 263
G4 65-7/11 261
G4 95-6/9 263
G4 95-7/11 261
G4 110-6/9 263
G20 260
G28 270
G32 270
G33 270
G56-6/6.29-078 264
G60-6/9.2 262
G71-6/9.20-1.0 262
G85-6/6.7 265
G90-6/6.70-0.73 265
G100 261
G125-9/15.9 269
G125-16/11.9 271
G125-16/14 268
G131-9/14.57-1.0 267
G135-16/11.9 271
G140-8 264
G141-9/14.57-1.0 266
G155-9/15.9 269
G155-16/11.9 271
G155-16/14 268
G180-16/11.9 271
G180-16/14 268
G200-16/11.9 270
G210-16/14.2-0.83 269
G211-12/14.93-1.0 NewAMT 273
G211-12K/14.93-1.0 273
G211-16/17.0 273
G221-9/16.15-1.0 267
G230-12/11.67-0.78 NewAMT 272
G230-12K/11.67-0.78 272
G230-16S/14.2-0.83 272
G231-16/17.0 266
G240-16/11.7 271
G241-16K/17.0-1.0 266
G260-16/9.75-0.57 272
G280-16/11.72-0.69 NewAMT 271
G280-16K/11.72-0.69 271
G281-12/14.93-1.0 NewAMT 268
G281-12K/14.93-1.0 268
G330-12/11.64-0.78 NewAMT 272
G330-12K/11.64-0.78 272
GV4 65-6/9 263
GV4 95-6/9 263
GV4 110-6/9 263
MB-1 (ORIGINAL) 260
MBT-520-6DA 262
MBT-520S-6D 262
MBT-660-6OA 265
MBT-660S-6O 265
NSG 370-6 270
NSG 400-6 270
TSG 360 270
TSG 480 270

Navistar International 102

13AEW 102
13AEX 102
13AEY 102
13AEZ 102
13AGA 102
13AGB 102
13AGC 102
13AHP 102
13AHR 102
13AHS 102
13AHT 102
13AHU 102
13AHV 102
13AHW 102
13AKV 102
13AKW 102
13AKX 102
13AKY 102
13ADN 103
13ADP 103
13ADR 103
13ADX 103
13ADY 103
13AGD 103
13AGE 103
13AGH 103
13AGJ 103
13AGL 103
13AGM 103
13AGP 103
13AGR 103
13AJE 103
13AJG 103
13AJH 103
13AJJ 103
13AJK 103
13AJL 103
13AJN 103
13AJP 103
13AJU 103
13AJV 103
13AJW 103
13AJX 103
13AKA 103
13AKB 103
13GEW 131
13GPL 131
13289 137
13GMS 146
13GNG 146
13GML 166
13GMM 166
13GMN 166
13GPB 166
13GPC 166
13GPD 166
13GMJ 170
13GJR 175
13GJS 188
13GKJ 188
13GKK 188
13GKL 188
13GKM 188
13GMY 188
13GMZ 188
13GNA 188
13GNM 188
13GNU 188
13GPP 188
13GPS 188
13GPT 188
13GPU 188
13GRD 188
13GRE 188
13GRH 188
13GGM 203
13GGV 203
13GHC 203
13GHL 203
13GHP 203
13GHS 203
13GKZ 203
13GGL 209
13GGU 209
13GHB 209
13GHK 209
13GHN 209
13GHR 209
13GJT 209
13GHY 212
13GPM 219
13GPW 219
13GRL 219
13GHV 222
13GHW 222
13GHX 222
13GPN 222
13GPR 222
13GRK 222
13MET 290
13MEU 290
13MEV 290
13MGG 296
13MGH 296
13MGJ 296
13MGM 296
13MGN 296
13MEX 299
13MEY 299

13MEZ 299
13MGA 299
13MGB 299
13MGV 302
13MGW 302
13DBG 306
13DBH 307
13DBJ 307
13DGT 316
13DGU 316
13447 364
13MCG 375
13DDS 395
13MCH 400

New Process Index 274

542-CD 277
542-CL 275
542-DD 277
542-DL 276
542-FD 277
542-FL 276
542-GD 277
542-GL 275

New Venture Index 279

241 HD Trans case 280
4500 HD (DODGE) 282
NV-021 283
NV-4500 (CHEVY - After FEB/94) 282
NV-4500 (CHEVY - BEFORE FEB/94) 281
NV-4500 (DODGE - After FEB/94) 282
NVG-4500 (CHEVY - After FEB/94) 282

Paccar 116

PO-14F112C 116
PO-15F112C 116
PO-16F112C 116
PO-17F112C 116
PO-18F112C 116
PXD-16F118D 117
PXD-18F118D 117
PXDP-16F118D 117
PXDP-18F118D 117

Rockwell-ZF-Meritor Index 285

M-11F9A-E11 288
M-11F9A-S11 288
M-11F10A-E11 288
M-11F10A-S11 288
M-11G9A-D11 288
M-11G9A-E11 288
M-11G9A-M11 288
M-11G9A-S11 288
M-11G10A-D11 288
M-11G10A-E11 288
M-11G10A-M11 288
M-11G10A-S11 288
M-12F9A-E12 288
M-12F9A-S12 288
M-12F10A-E12 288
M-12F10A-S12 288
M-12G9A-D12 288
M-12G9A-E12 288
M-12G9A-M12 288
M-12G9A-S12 288
M-12G10A-D12 288
M-12G10A-E12 288
M-12G10A-M12 288
M-12G10A-S12 288
M-13F9A-E13 288
M-13F9A-S13 288
M-13F10A-E13 288
M-13F10A-S13 288
M-13G9A-D13 288
M-13G9A-E13 288
M-13G9A-M13 288
M-13G9A-S13 288
M-13G10A-D13 288
M-13G10A-E13 288
M-13G10A-M13 288
M-13G10A-S13 288
M-13Z12A-A13 300
M-14F9A-E14 288
M-14F9A-S14 288
M-14F10A-E14 288
M-14F10A-M16 288
M-14F10A-S14 288
M-14F10A-S15 288
M-14G9A-D14 288
M-14G9A-E14 288
M-14G9A-M14 288
M-14G9A-S14 288
M-14G10A-D14 288
M-14G10A-D16 288
M-14G10A-E14 288
M-14G10A-E16 288
M-14G10A-M14 288
M-14G10A-M16 288
M-14G10A-S14 288
M-14G10A-S16 288
M-14Z12A-A14 300
M-15F10A-E15 288
M-15F10A-S15 288
M-15G9A-D15 288
M-15G9A-E15 288
M-15G9A-M15 288
M-15G9A-S15 288
M-15G10A-D15 288
M-15G10A-E15 288
M-15G10A-M15 288
M-15G10A-S15 288
MO-11F9B-E11 291
MO-11F9B-S11 291
MO-11F10A-S11 297
MO-11F10C-E11 294
MO-11F10C-S11 294
MO-11G9B-D11 291
MO-11G9B-E11 291
MO-11G9B-M11 291
MO-11G9B-S11 291
MO-11G9R-M11 297
MO-11G10A-D11 297
MO-11G10A-E11 297
MO-11G10A-M11 297
MO-11G10A-S11 297
MO-11G10C-D11 294
MO-11G10C-E11 294
MO-11G10C-M11 294
MO-11G10C-S11 294
MO-12F9A-E12 297
MO-12F9A-S12 297
MO-12F9B-E12 291
MO-12F9B-S12 291
MO-12F10A-E12 297
MO-12F10A-S12 297
MO-12F10C-E12 294
MO-12F10C-S12 294
MO-12G9A-D12 297
MO-12G9A-E12 297
MO-12G9A-M12 297
MO-12G9A-S12 297
MO-12G9B-D12 291
MO-12G9B-E12 291
MO-12G9B-M12 291
MO-12G9B-S12 291
MO-12G9R-M12 297
MO-12G10A-D12 297
MO-12G10A-E12 297
MO-12G10A-M12 297
MO-12G10A-S12 297
MO-12G10C-D12 294
MO-12G10C-E12 294
MO-12G10C-M12 294
MO-12G10C-S12 294
MO-13F9A-E13 297
MO-13F9A-S13 297
MO-13F9B-E13 291
MO-13F9B-S13 291
MO-13F10A-E13 297
MO-13F10A-S13 297
MO-13F10C-E13 294
MO-13F10C-S13 294
MO-13G9A-D13 297
MO-13G9A-E13 297
MO-13G9A-M13 297
MO-13G9A-S13 297
MO-13G9B-D13 291
MO-13G9B-E13 291
MO-13G9B-M13 291
MO-13G9B-S13 291
MO-13G9R-M13 297
MO-13G10A-D13 297
MO-13G10A-E13 297
MO-13G10A-M13 297
MO-13G10A-S13 297
MO-13G10C-D13 294
MO-13G10C-E13 294
MO-13G10C-M13 294
MO-13G10C-S13 294
MO-13Z12A-A13 300
MO-13Z16A-A13 300
MO-14F9A-E14 297
MO-14F9A-S14 297
MO-14F9B-E14 291
MO-14F9B-S14 291
MO-14F10A-E14 297
MO-14F10A-M16 297
MO-14F10A-S14 297
MO-14F10C-E14 294
MO-14F10C-M16 294
MO-14F10C-S14 294
MO-14G9A-D14 297
MO-14G9A-E14 297
MO-14G9A-M14 297
MO-14G9A-S14 297
MO-14G9B-D14 291
MO-14G9B-E14 291
MO-14G9B-M14 291
MO-14G9B-S14 291
MO-14G9R-M14 297
MO-14G10A-D14 297
MO-14G10A-D16 297
MO-14G10A-E14 297
MO-14G10A-E16 297
MO-14G10A-M14 297
MO-14G10A-M16 297
MO-14G10A-S14 297
MO-14G10A-S16 297
MO-14G10C-D14 294
MO-14G10C-D16 294
MO-14G10C-E14 294
MO-14G10C-E16 294
MO-14G10C-M14 294
MO-14G10C-M16 294
MO-14G10C-S14 294
MO-14G10C-S16 294
MO-14Z12A-A14 300
MO-14Z16A-A14 300
MO-15F9B-E15 291
MO-15F9B-S15 291
MO-15F10A-E15 297
MO-15F10A-S15 297

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

MO-15F10C-E15 294
MO-15F10C-S15 294
MO-15G9B-D15 291
MO-15G9B-E15 291
MO-15G9B-M15 291
MO-15G9B-S15 291
MO-15G10A-D15 297
MO-15G10A-E15 297
MO-15G10A-M15 297
MO-15G10A-S15 297
MO-15G10C-D15 294
MO-15G10C-E15 294
MO-15G10C-M15 294
MO-15G10C-S15 294
MO-15Z12A-A15 300
MO-15Z16A-A15 300
MO-16F10A-E16 297
MO-16F10A-S16 297
MO-16F10C-D18 294
MO-16F10C-E18 294
MO-16F10C-M18 294
MO-16F10C-S18 294
MO-16G10A-D16 297
MO-16G10A-E16 297
MO-16G10A-M16 297
MO-16G10A-S16 297
MO-16G10C-D16 294
MO-16G10C-D18 294
MO-16G10C-E16 294
MO-16G10C-E18 294
MO-16G10C-M16 294
MO-16G10C-M18 294
MO-16G10C-S16 294
MO-16G10C-S18 294
MO-16Z12A-A16 300
MO-16Z16A-A16 300
MO-17G10C-D17 294
MO-17G10C-D19 294
MO-17G10C-E17 294
MO-17G10C-E19 294
MO-17G10C-M17 294
MO-17G10C-M19 294
MO-17G10C-S17 294
MO-17G10C-S19 294
MO-18G10C-D18 294
MO-18G10C-D20 294
MO-18G10C-E18 294
MO-18G10C-E20 294
MO-18G10C-M18 294
MO-18G10C-M20 294
MO-18G10C-S18 294
MO-18G10C-S20 294
RD10-145A 288
RE9-115A 288
RE9-125A 288
RE9-135A 288
RE9-145A 288
RE9-155A 288
RE10-115A 288
RE10-125A 288
RE10-135A 288
RE10-145A 288
RE10-155A 288
REO9-115B 291
REO9-125A 297
REO9-125B 291
REO9-135A 297
REO9-135B 291
REO9-145A 297
REO9-145B 291
REO9-155B 291
REX9-115B 291
REX9-115R 291
REX9-125A 297
REX9-125B 291
REX9-125R 291
REX9-135A 297
REX9-135B 291
REX9-135R 291
REX9-145A 297
REX9-145B 291
REX9-145R 291
REX9-155B 291
REX10-115A 297
REX10-115C 294
REX10-125A 297
REX10-125C 294
REX10-135A 297
REX10-135C 294
REX10-145A 297
REX10-145C 294
REX10-155A 297
REX10-155C 294
REX10-165A 297
REX10-165C 294
RM9-115A 288
RM9-125A 288
RM9-135A 288
RM9-145A 288
RM9-155A 288
RM10-115A 288
RM10-125A 288
RM10-135A 288
RM10-145A 288
RM10-145AT 288
RM10-155A 288
RMO9-115A 297
RMO9-115B 291
RMO9-115R 297
RMO9-125A 297
RMO9-125B 291
RMO9-125R 297
RMO9-135A 297
RMO9-135B 291
RMO9-135R 297
RMO9-145A 297
RMO9-145B 291
RMO9-145R 297
RMO9-155B 291
RMO10-115A 297
RMO10-125A 297
RMO10-135A 297
RMO10-145A 297
RMO10-145AT 297
RMO10-155A 297
RMO13-145A 288
RMX9-115B 291
RMX9-115R 297
RMX9-125A 297
RMX9-125B 291
RMX9-125R 297
RMX9-135A 297
RMX9-135B 291
RMX9-135R 297
RMX9-145A 297
RMX9-145B 291
RMX9-145R 297
RMX9-155B 291
RMX10-115A 297
RMX10-115C 294
RMX10-125A 297
RMX10-125C 294
RMX10-135A 297
RMX10-135C 294
RMX10-145A 297
RMX10-145C 294
RMX10-145CT 294
RMX10-155A 297
RMX10-155C 294
RMX10-165A 297
RMX10-165C 294
RMX10-165CT 294
RMX13-145A 288
RS9-115A 288
RS9-125A 288
RS9-135A 288
RS9-145A 288
RS9-155A 288
RS10-115A 288
RS10-125A 288
RS10-135A 288
RS10-145A 288
RS10-155A 288
RSO9-115B 291
RSO9-125B 291
RSO9-135B 291
RSO9-145B 291
RSO9-155B 291
RSX9-115B 291
RSX9-115C 291
RSX9-115R 291
RSX9-125A 297
RSX9-125B 291
RSX9-125C 291
RSX9-125R 297
RSX9-135A 297
RSX9-135B 291
RSX9-135C 291
RSX9-135R 297
RSX9-145A 297
RSX9-145B 291
RSX9-145C 291
RSX9-145R 297
RSX9-155B 291
RSX9-155C 291
RSX9-165C 291
RSX10-115A 297
RSX10-115C 294
RSX10-125A 297
RSX10-125C 294
RSX10-135A 297
RSX10-135C 294
RSX10-145A 297
RSX10-145C 294
RSX10-155A 297
RSX10-155C 294
RSX10-165A 297
RSX10-165C 294

Spicer Index ////////////////////////////////// 301

1007-2A(301117)(301206) 327
1007-2B(301118)(301207) 313
1007-3A(301121)(301208) 356
1010-2A(301111) 368
1010-3A(301113) 371
1010-3B(301115) 390
1010-4A(301112) 368
1010-5A(301114) 371
1020-2A(301123) 368
1020-3A(301125) 390
1020-4A(301124) 368
1020-5A(301126) 390
1052A(301091) 328
1054A(301092) 328
1062A(301101) 327
1062B(301103) 329
1062C(301133) 313
1062D(301148) 329
1064A(301102) 327
1064B(301104) 329
1064C(301136) 313
1064D(301149) 329
1107-2A(301201) 305
1207-2A(301195) 327
1207-2B(301196) 313
1207-2D(301240) 313
1207-3A(301199) 356

1211-3A 358
1211-5A 358
1214-3A(301130)(301212) 360
1214-5A(301131)(301213) 360
1241C(300977.301145.301151) 395
1241-CT 395
1241D(300978.301146.301152) 395
1241-DT 395
1252A(301094) 346
1253A(301096) 382
1253B(301098) 384
1254A(301095) 346
1255A(301097) 382
1255B(301099) 384
1262A(301105) 351
1263A(301107) 362
1263B(301109) 356
1264A(301106) 351
1265A(301108) 362
1272A(301140)(301215) 313
1272B(301158) 329
1274A(301141)(301216) 313
1274B(301159) 329
1310-2A(301292) 308
1310-4A(301317) 308
1352A(301235) 328
1362A(301169) 327
1362B(301171) 313
1362C(301178) 313
1362D(301180) 313
1364C(301179) 313
1372A(301271)(301398) 305
1372B(301325)(301405) 304
1374A(301272) 305
1410-2A(301288)(301161) 368
1410-3A(301163) 371
1410-3B(301165) 390
1412-3A(301227) 371
1414-3A(301243)(301290) 371
1420-3A(301232)(301239) 371
1420-3B(301332) 371
1452A(301183) 346
1453A(301185) 382
1453B(301187) 384
1462A(301173) 327
1463A(301175) 362
1463C(301357) 362
5652(8-BOLT&6-BOLTOPENING) 315
5652A(8-BOLT&6-BOLTOPENING) 317
5652B(8-BOLT&6-BOLTOPENING) 315
5752(8-BOLT&6-BOLTOPENING) 317
5752C(8-BOLT&6-BOLTOPENING) 352
5753A 354
5756B(8-BOLT&6-BOLTOPENING) 342
5852 315
6852 386
6852G 348
6853B 386
9072A(301321) 306
AMO1000-4C(301474) 395
AMO1000-4D(301475) 395
APO1000-4C(301476) 395
APO1000-4D(301477) 395
AS56-7B AMT-7 398
AS100-10D(301612) 374
AS125-9A 369
AS125-10D(301613) 374
AS135-9A 369
AS135-10D(301614) 374
AS140-9A 369
AS145-10D(301615) 374
ASO10-VPD 393
ASO56-7A(301452)(301636) 373
ASO56-7B 373
ASO66-7A(301452)(301636) 373
ASO66-7B 373
ASO100-10S 393
ASO125-9A 396
ASO125-10D 396
ASO125-10S(301541)(301579) 393
ASO135-9A 396
ASO135-10D 396
ASO140-9A 391
ASO140-10S(301542)(301580) 393
ASO145-9A 391
ASO150-9A 391
ASO150-10S(301526)(301578) 393
ASO165-10S(301543)(301581) 393
ATO1000-4C 395
ATO1000-4D 395
CM-4054A(301329)(301420) 319
CM-4054D(301343)(301421) 320
CM-4954A(301386) 311
CM-4954D(301387) 312
CM-5052A(301068)(301472) 321
CM-5052B(301248)(301079) 323
CM-5052C(301249)(301080) 321
CM-5052D(301250)(301230) 325
CM-5252A(301251)(301081) 344
CM-5510(301315)(301371) 321
CM-5552A(301309)(301366) 321
CM-5552B(301310)(301367) 323
CM-5552C(301311)(301368) 321
CM-5552D(301312)(301369) 325
CM-5852A(301313)(301370) 344
CM-5952A(301360) 321
CM-5952B(301361) 323
CM-5952C(301362) 321
CM-5952D(301363) 325
CM-5952E(301364) 344
CM-6052A(301253)(301075)(301413) 336
CM-6052B(301254)(301082)(301414) 338
CM-6052C(301255)(301083)(301415) 349
CM-6052D(301256)(301416) 340
CM-6252A(301257)(301084). 376
CM-6252B(301258)(301085)(301417) 387
CM-6253A(301259)(301086) 378
CM-6253B(301260)(301087)(301418) 388
CV67F 340
ES42-5A(301438) 319
ES42-5D(301439) 320
ES43-5A(301510)(301633) 311
ES43-5D(301511)(301634) 312
ES46-5A 314
ES52-5A(301455) 311
ES52-5D(301456) 312
ES52-7A(301451)(301635) 313
ES52-7B(301642)(301637) 313
ES53-5A(301508)(301631) 311
ES53-5D(301509)(301632) 312
ES54-5A 310
ES54-5C 347
ES55-5D 325
ES56-7B(301739) 398
ES60-5A(301460) 321
ES60-5C(301461) 321
ES60-5D(301462) 325
ES60-5E(301463) 344
ES60-5F(301482) 321
ES62-5A(301528) 321
ES62-5D(301530) 325
ES65-5A(301466) 336
ES65-5B(301467) 338
ES65-5D(301469) 340
ES65-5E(301468) 349
ES67-5A(301532) 321
ES67-5D(301534) 325
ES68-5D 325
ES70-5A(301536) 336
ES70-5D(301539) 340
ES72-5A 336
ES72-5B(301637) 388
ES72-5C 340
ES72-5D 340
ESO65-7A(301452)(301636) 373
ESO66-7B(301643)(301638)(301742) 373
LAS100-10D(301616) 374
LAS115-9A(301590) 369
LAS125-9A(301591) 369
LAS125-10D(301617) 374
LAS135-9A(301592) 369
LAS135-10D(301618) 374
LAS140-9A 369
LAS145-9A(301593) 369
LAS145-10D(301619) 374
LASO10-VPD 393
LASO115-9A(301594) 391
LASO125-9A(301595) 391
LASO125-10S(301620) 393
LASO135-9A(301597) 391
LASO140-9A 391
LASO140-10S(301621) 393
LASO145-9A(301596) 391
LASO150-9A 391
LASO150-10S(301622) 393
LLAS100-10D 374
LLAS125-10D 374
LLAS135-10D 374
LLAS145-10D 374
LLASO125-10S 393
LLASO140-10S 393
LLASO150-10S 393
LLPS100-10D 374
LLPS125-10D 374
LLPS135-10D 374
LLPS145-10D(301703) 374
LLPSO100-10S 393
LLPSO125-10S 393
LLPSO140-10S(301705) 393
LLPSO150-10S 393
LLPSO165-10S 393
LPS9-VPD 391
LPS100-10D(301608) 374
LPS125-9A(301547)(301567) 369
LPS125-10D(301609) 374
LPS135-10D(301610) 374
LPS140-9A(301549)(301569) 369
LPS145-10D(301611) 374
LPSO9-VPD 391
LPSO10-VPD 393
LPSO100-10S 393
LPSO125-9A(301548)(301568) 391
LPSO125-10S(301544)(301572) 393
LPSO140-9A(301550)(301570) 391
LPSO140-10S(301545)(301573) 393
LPSO150-9A(301551)(301571) 391
LPSO150-10S(301546)(301574) 393
LPSO165-10S 393
P1241C(301053)(301395) 395
P1241D(301054)(301396) 395
PS9-VPD 391
PS85-10LL 308
PS85-14-4L(301525) 308
PS86-10V(301587) 366
PS95-9A(301500)(301553) 369
PS97-7A(301446) 306
PS100-10D(301604) 374
PS105-7LL(301464) 328
PS110-7A(301519) 305
PS110-7B(301518) 304
PS125-7B(301445) 304
PS125-9A(301431)(301554) 369
PS125-10D(301605) 374
PS130-5A(301470) 328
PS130-6B(301471) 313
PS130-6L(301465) 328
PS130-10A(301485) 308
PS130-12A(301484) 308

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

PS135-10D(301606) 374
PS140-7A(301444) 305
PS140-9A(301495)(301555) 369
PS145-7A(301520) 305
PS145-10D(301607) 374
PSO9-VPD 391
PSO10-VPD 393
PSO85-10LL 371
PSO85-14-4L 371
PSO100-10S(301505)(301560) 393
PSO115-10V(301588) 393
PSO120-8LL(301644) 356
PSO125-9A(301499)(301556) 391
PSO125-10D 396
PSO125-10S(301504)(301561) 393
PSO125-10V(301589) 393
PSO135-10D 396
PSO140-6A(301472) 362
PSO140-6C(301486) 362
PSO140-9A(301432)(301557) 391
PSO140-10S(301506)(301562) 393
PSO140-12B(301473) 371
PSO140-14A(301483) 371
PSO145-10D 396
PSO145-10V(301582) 393
PSO150-9A(301496)(301558) 391
PSO150-9S(301521) 393
PSO150-10S(301503)(301563) 393
PSO150-16A(301641) 362
PSO150-16B(301647) 334
PSO155-10D 396
PSO160-10S(301517) 393
PSO165-10D 396
PSO165-10S(301523)(301564) 393
PSO165-12B 371
PSO165-16B(301583) 334
PSO165-18A(301666) 329
PSO165-18B 329
PSO175-16B(301584) 334
PSO175-16M(301645) 334
PSO175-18A(301585) 329
PSO175-18B 329
PSO175-18M(301849) 329
T-9505-2A(301408) 328
T-9505-2B(301425) 328
TSP120-12A 380
TSPO145-14A 364
TSPO145-16B 334
TSPO155-14HP 364
TSPO155-16A 362
TSPO155-16B 334
TSPO155-16HP 334
TSPO165-16HP 334
TSPO165-18A 332
TSPO165-18HP 332

Volvo Index ////////////////////////////////// 399

AT-2412C 401
AT-2412D 401
AT-2512C 401
AT-2612D 401
AT-2612E 401
AT-2612F 401
AT-2812C 401
AT-2812D 401
ATO-2512C 403
ATO-2612D 403
ATO-2612F 403
ATO-3112C 403
ATO-3112D 403
DT-2412C 404
MR-61 404
MR-62 404
R-51 405
R-52 405
R-61 404
R-62 404
R-70 404
R-1000 400
R-1400 400
R-1700 400
SR-52 405
SR-61 405
SR-62 405
SR-70 405
SR-1400 401
SR-1700 401
SR-1900 401
SR-2000 400
SRO-2400 402
V-2412AT 401
V-2512AT 401
V-2812AT 401
VO-2512AT 403
VO-3112AT 403
VT-809 400
VT-1309 400
VT-1414 400
VT-1708 400
VT-2009B 400
VT-2014B 401
VT-2214B 401
VT-2412B 402
VT-2512C 401
VT-2514B 401
VT-2812C 401
VTO-2214B 403
VTO-2512C 403
VTO-2514B 403
VTO-3112C 403

Warner Index ////////////////////////////////// 407

T-18 408
T-18A 409
T-18B 408
T-18C 409
T-19 408
T-19A 408
T-19D 409
T-98-1R 408
T-98-1V 408
T-98A 408

ZF Index ////////////////////////////////// 411

4-120GP/8.05 453
4-120GP/9.16 449
4-120GP/10.91 444
4-150GP/9.19 446
5-90GP/13 451
5-90GP/13.01 451
5-110GP/8.20 453
5-110GP/9.72 449
5-110GP/11.2 453
5-110GP/13.1 449
5-110GPA 448
5-111GP/13.04 446
5S-270 VO 438
6AS700/6.02-0.79 428
6AS800 TO/6.58 - 0.78 424
6AS1000 TO/6.75 - 0.78 424
6S-300 433
6S-350 VD 434
6S-380 VO 434
6S-400 434
6S700/6.02-0.79 428
6S800 TO/6.58-0.78(VOLVO ZTO 1006) 424
6S850/6.72-0.79 457
6S850/8.51-1.0 416
6S1000 TO/6.75 - 0.78 424
6S1200 TD/7.72 - 1.00 425
6S1200 TO/6.75 - 0.83 432
8S151/13.79 452
8S220 TO/11.54-0.84 455
8S1620 TD/13.80-1.0 451
8S1820 TO/11.54-0.84 455
9S75/9.56 449
9S75/13.16 431
9S109/10.24 442
9S109/10.25 442
9S109/12.91 435
9S109/12.92 436
9S1110 TD/12.73 435
9S1110 TO/9.48-0.75 (VOLVO ZTO 1109) 453
9S1310 TO/9.48 453
12AS1010TO 454
12AS1210TO 454
12AS1420TD 443
12AS1420TO 454
12AS1620TO 454
12AS1630 TD/15.86-1.0 446
12AS1631 TD/15.86-1.0 IT 446
12AS1800/14.89-1.0 IT 439
12AS1930 TD/15.86-1.0 446
12AS1930 TO/12.33-0.78 456
12AS1931 TD/15.86-1.0 IT 446
12AS1931 TO/12.33-0.78 IT 456
12AS2130 TD/15.86-1.0 446
12AS2130 TO/12.33-0.78 456
12AS2131 TD/15.86-1.0 IT 446
12AS2131 TO/12.33-0.78 IT 456
12AS2140 TD/15.86-1.0 446
12AS2141 TD/15.86-1.0 IT 446
12AS2301 TD/15.86-1.0 IT 446
12AS2301 TO/12.33-0.78 IT 456
12AS2330 TO/12.33-0.78 456
12AS2331 TO/12.33-0.78 IT 456
12AS2340 TD/15.86-1.0 446
12AS2341 TD/15.86-1.0 IT 446
12AS2430 TD/15.86-1.0 446
12AS2431 TD/15.86-1.0 IT 446
12AS2530 TO/12.33-0.78 456
12AS2531 TO/12.33-0.78 IT 456
12AS2531 TO/15.86-1.0 445
12AS2540 TD/15.86-1.0 446
12AS2540 TO/12.29-0.78 456
12AS2541 TO/12.29-0.78 IT 456
12AS2740 TO/12.29-0.78 456
12AS2741 TO/12.29-0.78 IT 456
12AS2940 TO/12.29-0.78 456
12AS2941 TO/12.29-0.78 IT 456
12S2100 TD/15.57-1.0 445
12S2101 TD/15.57-1.0 IT3 445
12S2300 TD/15.57-1.0 445
12S2301 TD/15.57-1.0 IT3 445
12S2800 TD/15.57-1.0 445
12S2801 TD/15.57-1.0 IT3 445
12TX-1410TD/16.69-1.0, 458
12TX-1610TD/16.69-1.0, 458
12TX-1610TO/12.92-0.77, 459
12TX-1810TD/16.69-1.0, 458
12TX-1810TO/12.92-0.77, 459
12TX-2010TD/16.69-1.0, 458
12TX-2010TO/12.92-0.77, 459
12TX-2210TD/16.69-1.0, 458
12TX-2210TO/12.92-0.77, 459
12TX-2410TO/12.92-0.77, 459
12TX-2420TD/16.69-1.0, 458
12TX-2610TO/12.92-0.77, 459
12TX-2620TD/16.69-1.0, 458
12TX-2820TD/16.69-1.0. 458
12TX-2820TO/12.92-0.77, 459
12TX-3020TO/12.92-0.77, 459
12TX-3220TO/12.92-0.77, 459
12TX-3420TO/12.92-0.77. 459
16AS2200/15.89-1.0 IT 435
16AS2230 TD/17.03-1.0 439

16AS2231 TD/17.03-1.0 IT 439
16AS2601 TD/17.03-1.0 IT 439
16AS2601 TO/14.12-0.83 455
16AS2630 TO/14.12-0.83 455
16AS2631 TO/14.12-0.83 IT 455
16S109/11.86 438
16S109/13.30 444
16S109/13.31 437
16S109/13.42 444
16S109/13.53 443
16S112/11.46 (TRILOBE) 447
16S112/13.68 (TRILOBE) 447
16S130/11.46 (TRILOBE) 446
16S130/11.74 (TRILOBE) 446
16S130/13.68 (TRILOBE) 446
16S130/13.80 (TRILOBE) 441
16S130/14.14 (TRILOBE) 441
16S130/14.29 (TRILOBE) 437
16S130/16.47 (TRILOBE) 441
16S130/17.06 (TRILOBE) 437
16S130/17.47 (TRILOBE) 437
16S150/16.47/13.80 (TRILOBE) 442
16S151/13.80IT 441
16S151/13.80IT (TRILOBE) 440
16S151/13.85-0.84 440
16S151/13.85-0.84 (TRILOBE) 440
16S151/13.85IT 441
16S151/16.41IT 441
16S151/16.47IT 441
16S151/16.53-1.0 440
16S151/16.53-1.0 (TRILOBE) 440
16S151/16.53IT 441
16S160/11.46 (TRILOBE) 448
16S160/13.68 (TRILOBE) 448
16S160/14.29 (TRILOBE) 437
16S160/17.06 (TRILOBE) 437
16S160A/11.74 (TRILOBE) 447
16S160A/14.14 (TRILOBE) 442
16S160A/17.47 (TRILOBE) 436
16S181/13.80IT 441
16S181/13.85-0.84 440
16S181/13.85IT 441
16S181/16.41IT 441
16S181/16.47IT 441
16S181/16.53-1.0 440
16S181/16.53IT 441
16S190/11.46 (TRILOBE) 447
16S190/13.68 (TRILOBE) 448
16S190A/11.74 (TRILOBE) 448
16S190A/17.47 (TRILOBE) 436
16S220/13.80IT (TRILOBE) 440
16S220/13.80 (TRILOBE) 448
16S220/16.47 (TRILOBE) 448
16S220A/14.14 (TRILOBE) 442
16S221/13.80IT 441
16S221/13.80IT (TRILOBE) 440
16S221/13.85-0.84 440
16S221/13.85-0.84 (TRILOBE) 440
16S221/13.85IT 441
16S221/16.41IT 441
16S221/16.47IT 441
16S221/16.53-1.0 440
16S221/16.53-1.0 (TRILOBE) 440
16S221/16.53IT 441
16S251IT 441
16S1620 TD/16.41-1.0 439
16S1621 TD/16.41-1.0 IT 439
16S1820 TO/13.80-0.84 451
16S1821 TO/13.80-0.84 IT 452
16S1920 TD/16.41-1.0 439
16S1921 TD/16.41-1.0 IT 439
16S2220 TD/16.41-1.0 439
16S2220 TO/13.80-0.84 451
16S2221 TD/16.41-1.0 IT 439
16S2221 TO/13.80-0.84 IT 452
16S2320 TD/16.41-1.0 439
16S2321 TD/16.41-1.0 IT 439
16S2330 TD/16.41-1.0 439
16S2331 TD/16.41-1.0 IT 439
16S2520 TO/13.80-0.84 451
16S2521 TO/13.80-0.84 IT 452
16S2720 TO/13.80-0.84 451
16S2720 TO/13.80-0.84 IT + WSK 452
16S2721 TO/13.80-0.84 IT 452
16S2730 TO/13.80-0.84 451
16S2731 TO/13.80-0.84 IT 452
16TX-1640TD/17.94-1.0, 458
16TX-1840TD/17.94-1.0, 458
16TX-1840TO/14.68-0.82, 458
16TX-2040TD/17.94-1.0, 458
16TX-2040TO/14.68-0.82, 458
16TX-2240TD/17.94-1.0, 458
16TX-2240TO/14.68-0.82, 458
16TX-2440TD/17.94-1.0, 458
16TX-2440TO/14.68-0.82, 458
16TX-2640TD/17.94-1.0, 458
16TX-2640TO/14.68-0.82, 458
16TX-2840TD/17.94-1.0. 458
16TX-2840TO/14.68-0.82, 458
16TX-3040TO/14.68-0.82, 458
16TX-3240TO/14.68-0.82, 458
16TX-3440TO/14.68-0.82. 458
2840.6 434
S5-24/6.34 450
S5-24/6.40 450
S5-30/7.31 429
S5-30/8.00 425
S5-30/8.50 421
S5-35/5.64 432
S5-35/6.45 426
S5-35/6.75 424
S5-35/6.79 434
S5-35/7.65 418
S5-35/8.02 417
S5-42/4.65 444
S5-42/5.72 457
S5-42/6.56 454
S5-42/7.55 455
S5-50/5.30 433
S5-50/5.50 431
S5-50/6.20 426
S5-50/6.61 422
S5-50/6.61+GV80/5.30 422
S5-50/8.02 416
S5-50/8.02+GV80/6.20 416
S5-90GPA 450
S6-36/6.06 429
S6-36/6.93-0.8 456
S6-36/7.43-0.85+GV36 420
S6-36/7.43-1.0 421
S6-36/8.97-0.83+GV36 415
S6-36/8.97-1.0 415
S6-65/6.37 433
S6-65/6.70, S6-80/6.7 432
S6-65/7.0+GV70/7.67 414
S6-65/7.40 428
S6-65/7.52 427
S6-65/7.97+GV80/6.70 424
S6-65/9.00 418
S6-65/9.00+GV80/6.70 419
S6-65/9.00+GV80/7.52 418
S6-66/7.36-1.0 423
S6-66/9.06-1.0 415
S6-70/6.8 422
S6-70/6.8+GV70/5.71 423
S6-70/7.36 421
S6-70/7.92 417
S6-70/9.03 414
S6-70/9.59 414
S6-75/6.70+GV80/7.52 427
S6-80/5.03 443
S6-80/5.66 436
S6-80/5.66+GV80/7.52 427
S6-80/6.7+GV80/5.30 432
S6-80/6.10 435
S6-80/6.90 423
S6-80/7.35 426
S6-80/7.41 428
S6-80/7.53 427
S6-80/7.67 425
S6-80/7.67+GV80/6.7 425
S6-80/7.90 456
S6-80/9.00 417
S6-80/9.00+GV80/5.30 419
S6-80/9.00+GV80/7.48 419
S6-80/9.00+GV80/7.52 418
S6-90/5.67 438
S6-90/5.74 436
S6-90/6.37 436
S6-90/6.98 431
S6-90/7.03 430
S6-90/7.03+GV90/5.67 430
S6-90/7.03+GV90/5.74 430
S6-90/7.40 429
S6-90/9.01 420
S6-90/9.01+GV90/7.40 420

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Index

Type	Pag.
Series	14
Options	15
Gear Ratio	16
Output	17
Input Gear	18
Assembly	20
Shifter	21

Cross Reference

Series

Bezares	Chelsea	Muncie	Notes
1000	442X	TG6S	
	442G	TG6B	ORDER with M1(THIS TRANSMISSION REQUIRES A METRIC STUD KIT)
1010	442Z	TG6D	Muncie uses standard case with M65 input gear
2000	489X	TG8S	
	489G	TG8B	ORDER with M2(THIS TRANSMISSION REQUIRES A METRIC STUD KIT)
2010	489Z	TG8D	Muncie uses standard case with M65 input gear
3000	271M		
3100		CS24	
		CS25	
3131	870X	CS11	Same as CS10 but with remote solenoid
3151	877X	CD10	
3131RP	890X		
	890L		
	890R		
	890H		
	890E		
	890T		
	890U		
3200	272X		
3252	280G	HS24	
3300	272A	CS6S	
	272D		
	272G	CS6B	
3800	282X	CS8S	
		CS8B	
3810	282Z	CS8D	
3900	247F	FR67	Fits both 4X2 & 4X4 5R110 transmission
		FR63	
		FR64	
3920	249F	FR66	Fits both 4X2 and 4X4 Used on 2013 F650 w.gas engines
		FR6Q	
4100	680X	SH8S	Bezares 4100 has higher torque and HP than 680X or SH8S
	680G	SH8B	ORDER with M2 stud kit(THIS IS METRIC TRANSMISSION AND REQUIRES M2 STUD KIT). Bezares 4100 has higher torque and HP than 680X or SH8S
4110	680Z	SH8D	Muncie uses standard case with M65 input gear. Bezares 4110 has higher torque and HP than 680Z or SH8S
6000	340X	RL6D	mounts on limited Mack transmissions PLEASE CALL FOR OPTIONS
	340G		ORDER with M1(THIS TRANSMISSION REQUIRES A METRIC STUD KIT)
6005	340Z		mounts on limited Mack transmissions PLEASE CALL FOR OPTIONS
6800	348X	RL8S	
	348G	RL8B	ORDER with M1(THIS TRANSMISSION REQUIRES A METRIC STUD KIT)
8000	863X	838S	
	863G	838B	order with M2 stud kit(THIS IS METRIC TRANSMISSION AND REQUIRES M2 STUD KIT)
8500	880X	828S	Muncie uses standard case with M65 input gear
	880Z		
	880G	828B	ORDER with M2 stud kit(THIS IS METRIC TRANSMISSION AND REQUIRES M2 STUD KIT)
6013399	941	SS66	Call Bezares for detailed information

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

PTO Series	Bezares	Chelsea	Muncie
1000	X P G	X P	X P G
1010	X P G	X P	X P G
2000	X P G	X P	X P G
2010	X P G	X P	X P G
3000	P	X P	

PTO Series	Bezares	Chelsea	Muncie
3100	P		X B
3131	P	P	4 X B
3131RP	W P	W P	
3151	P	P	X 4
3200	X	X	
3252	P	P	X B
3300	P	P	X P
3800	X	X	X

PTO Series	Bezares	Chelsea	Muncie
3810	X	X	X
3900	P	P	P
3920	P	X	B X
4100	X	X	X
4110	X	X	X
6000	X	X	X
6005	X	X	
6800	X	X	X
8000	X	X	X
8500	X	X	X G

Gear Ratio

Cross Reference

PTO Series	Bezares	Chelsea	Muncie
1000 1010	B	F	06
	C	L	07
		H	
	E	Q	08
	J	R	09
	O	S	12
			13
	R	U	
	S	W	15
	T	X	18
2000 2010	A	C	
	B	F	06
	C	L	07
		H	
	E	Q	08
	J	R	09
	O	S	12
			13
	R	U	
	S		15
	T	X	18
		W	
3000	B	A	
	C	B	
	E	D	
3100	B		05
	C		06
	E		07
	J		08
	Notes: J ratio is 120% Muncie 8 ratio is 115% on RDS 3000		
	M		10
	O		12

PTO Series	Bezares	Chelsea	Muncie
3131	C	A	05
	E	B	07
		C	06
	G	D	
	J	E	08
	Notes: J ratio is 117% Muncie 8 ratio is 116% on RDS 3000		
	M	F	10
		G	
	O	H	
		J	
3131RP	C	A	
	E	B	
		C	
	G	D	
	J	E	
	M	F	
		G	
	O	H	
		J	
3151	C	A	05
		B	
	E	C	06
	G	D	07
	J	E	08
	Notes: J ratio is 117% Muncie 8 ratio is 116% on RDS 3000		
	M	F	10
		G	
	O	H	12
		J	
3200	Z	A	
		B	
	A	C	
	C	G	
	E	K	
	J	M	
		P	
	O	S	

PTO Series	Bezares	Chelsea	Muncie
3252	B	C	06
	C	D	
	E		07
	G	G	
	J	K	09
	M	M	
		P	
	O	S	12
3300	Z	A	04
		B	
	A	C	05
	B		06
	C	G	07
	Notes: C ratio only available for AISIN transmission		
3800 3810	Z	B	04
	A		**05**
	B	**C**	**06**
	C	**G**	**07**
	E	**K**	**09**
	J	**M**	
		P	
	O	**S**	**12**
	R	**T**	**14**
3900	E	M	06
3920	E	M	09
4100 4110	B	F	05
	C	Q	07
	E	R	09
	J	S	12
6000	C	F	05
6005	C	F	
6800	C	F	05
8000	B	B	06
8500	B	B	05
	C	D	08
		G	
	E	J	09
	J	M	10
	O	Q	12
	R	R	13
	S		15
	T	T	

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

PTO Series	Bezares	Chelsea	Muncie
1000 1010 2000 2010	RA	XK	K
		RB	S
		AK	
	Available with 2/4 Bolt B only the competitors is a 2 Bolt B		
	RB	AF	P
	SE	XD	B
	SF	XE	R
	DA	XY	I
	TP	XR	G
	IC		C
	ID		2
3000	RA	XK	
		RB	
	RB	AF	
	SE	XD	
	DA	XY	
3100	RA		K
			S
	Available with 2/4 Bolt B only the competitors is a 2 Bolt B		
	RB		P
	SE		B
	DA		I
	IC		C
	ID		2
3131	RA		D
			S
	Available with 2/4 Bolt B only the competitors is a 2 Bolt B		
	RB		P
	RJ	RS	E
	SE		B
	DA	RY	I
	IC	XV	C
	ID	AC	2
	IG	AB	

PTO Series	Bezares	Chelsea	Muncie
3131RP	RA	XK	V
	RB	AF	
	RK	XS	
	DA	XY	
3190	RA		K
	RB		P
	RK		E
	DA		I
3151	RA		S
			D
	RB		P
	RJ	RS	E
	DA	RY	I
	IC	XV	C
	ID	AC	2
	IG	AB	
3200	SA	RK	
		RB	
	SE	XD	
	SB	RF	
	SF	RE	
	DA	RY	
	IC	XV	
	IG	AB	
	ID	AC	
3252	SA	RK	K
			6
			S
	SB	RF	P
	RJ	RS	
	SE	XD	B
	DA	RY	
	IC	XV	C
	ID	AC	2
	IG	AB	
3300	SA	RK	K
		RB	S
	SB	RF	P
	SE	XD	B
	SF	RE	R
	DA	RY	I
	IC	XV	C
	ID	AC	2
	IG	AB	

PTO Series	Bezares	Chelsea	Muncie
3800 3810	SA	RK	S
		RB	K
	SB	RF	P
	SE	XD	B
	SF	RE	R
	DA	RY	I
	IC	XV	C
	ID	AC	2
	IG	AB	
3900	SE	XD	B
	SF	XE	R
3920	SE	XD	
	SF	XE	B
	SI	XP	Q
4100 4110	RA	XK	K
		RB	S
	Available with 2/4 Bolt B only the competitors is a 2 Bolt B		
	RB	AF	P
	SE	XD	B
	DA	XY	I
	IC	XV	C
	ID		2
	RK		E
6000	SE	XD	B
6005	SE	XD	
6800	SE	XD	B
8000	IC	XV	C
	DA		2
8500	RK	XS	E
	RA		D
	RB		P
	DA	XY	I
	IC	XV	C
	IG	AB	2

(*) Available with 2/4 Bolt B only the competitors is a 2 Bolt B

Input Gear

Cross Reference

PTO Series	Bezares	Chelsea	Muncie	Notes
			U68	
	01	AH	S68	
			U60	
	02	AB	U57	
	04	AK	U62	
	05	AR	S60	
	06	AX	C60	
	07	BA	H65	
	08	BG	S70	
	09	BH	S72	
	10	BJ	G70	
	11	BQ	G73	
	*12	BR		
	13	BS	C76	
	14	DB	F10	
	15	DN	C61	#15
	16	EC	Z10	
	17	ES	F63	
	18	EW	F61	
	19	FB	N80	
	20	FC	N79	
1000	21	GS	Z99	
	22	BC	C61	#22
	23	DM	C57	
	24	DA	M65	
	25	DU	F75	
	26	ET	F65	
	27	EV	F11	
	28	JK	F70	
	29	JM	F67	
	30	BM	C70	
	31	BP		
	32	EQ		
	33	AP	S61	
	34	FN	S71	
	36	AW	N60	
	37	BK	N72	
	38	BL	N70	
	39	BZ	W80	#39
	40	CB	N81	
	41	CD	W80	#41
	42	JW	F66	
	43	DD	S58	

PTO Series	Bezares	Chelsea	Muncie	Notes
	44	EP	W96	
	45	FF	I85	
	46	HW	S89	
	47	HX	S80	
	48	JD	T61	
	49	JP	N10	
	50	HY	Z92	
	51	JU		
	52	ED	Z98	
	53	FK		
1000	54	FL		
	55	FP	R68	
	56	GQ	T82	
	57	GR		
	58	CR		
	59	JT		
	62	AL		
	64	HV	A69	
			A68	
	66	JA	F84	
	67	KU	I84	
	01	AH	U68	
1010	24	DA	M65	
	34	FN	S71	
1200	69		D94	
	01	AH	S68	
			U68	
	02	AB	U57	
	04	AK	U62	
	05	AR	S60	
	06	AX	C60	
	07	BA	H65	
	08	BG	S70	
2000	09	BH	S72	
	10	BJ	G70	
	11	BQ	G73	
	12	BR		
	13	BS	C76	
	14	DB	F10	
	15	DN	C61	#15
	16	EC	Z10	

PTO Series	Bezares	Chelsea	Muncie	Notes
	17	ES	F63	
	18	EW	F61	
	19	FB	N80	
	20	FC	N79	
	21	GS	Z99	
	22	BC	C61	#22
	23	DM	C57	
	24	DA	M65	
	25	DU	F75	
	26	ET	F65	
	27	EV	F11	
	28	JK	F70	
	29	JM	F67	
	30	BM	C70	
	31	BP		
	32	EQ		
	33	AP	S61	
	34	FN	S71	
	36	AW	N60	
	37	BK	N72	
	38	BL	N70	
2000	39	BZ	W80	#39
	40	CB	N81	
	41	CD	W80	#41
	42	JW	F66	
	43	DD	S58	
	44	EP	W96	
	45	FF	I85	
	46	HW	S89	
	47	HX	S80	
	48	JD	T61	
	49	JP	N10	
	50	HY	Z92	
	51	JU		
	52	ED	Z98	
	53	FK		
	54	FL		
	55	FP	R68	
	56	GQ	T82	
	57	GR		
	58	CR		
	59	JT		
	62	AL		
	66	JA	F84	

FOOT NOTES: ***#01:*** Muncie S68 is 96% of Bezares 01
#15: FS-3005C /3205C /4005C /4205C; CL-457
#22: FS-5005C /5205C; 397V; CL-557; CL-559C
#39: T18; T19; T98 - #41: T18A /B /C; T19A /D
* Check Availability

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

Input Gear

PTO Series	Bezares	Chelsea	Muncie	Notes
2010	01	AH	U68	
	24	DA	M65	
3000	60	AJ		
3100	63		A10	
3131	63	FJ	A10	
3131RP	63	FJ		
3151	63	FJ	A10	
3190	63	FJ	A10	
3200	01	AH		
	02	AB		
	04	AK		
	05	AR		
	06	AX		
	07	BA		
	08	BG		
	09	BH		
	10	BJ		
	11	BQ		
	12	BR		
	13	BS		
	14	DB		
	15	DN		#15
	16	EC		
	17	ES		
	18	EW		
	19	FB		
	20	FC		
	21	GS		
	22	BC		#22
	23	DM		
	24	DA		
	25	DU		
	26	ET		
	27	EV		
	28	JK		
	29	JM		
	30	BM		
	31	BP		
	32	EQ		
	33	AP		
	34	FN		
	36	AW		
	37	BK		
	38	BL		

PTO Series	Bezares	Chelsea	Muncie	Notes
3200	39	BZ		#39
	40	CB		
	41	CD		#41
	42	JW		
	43	DD		
	44	EP		
	45	FF		
	46	HW		
	47	HX		
	48	JD		
	49	JP		
	50	HY		
	51	JU		
	52	ED		
	53	FK		
	54	FL		
	55	FP		
	56	GQ		
	57	GR		
	58	CR		
	59	JT		
	62	AL		
	66	JA		
3252	63	FJ	A10	
3300	64	HV	A67	
	67	KU	I84	
3800	01	AH	S68	
			U68	
	02	AB		
	04	AK		
	05	AR	S60	
	06	AX		
	07	BA		
	08	BG	S70	
	09	BH		
	10	BJ		
	11	BQ		
	12	BR		
	13	BS		
	14	DB	F10	
	15	DN	C61	
	16	EC		
	17	ES	F63	
	18	EW		

PTO Series	Bezares	Chelsea	Muncie	Notes
3800	19	FB		
	20	FC		
	21	GS		
	22	BC		
	23	DM		
	24	DA	M65	
	25	DU		
	26	ET		
	27	EV		
	28	JK	F70	
	29	JM		
	30	BM	C70	
	31	BP		
	32	EQ		
	33	AP		
	34	FN	S71	
	36	AW		
	37	BK		
	38	BL		
	39	BZ		#39
	40	CB		
	41	CD		#41
	42	JW	F66	
	43	DD		
	*44	EP		
	*45	FF		
	*46	HW		
	*47	HX		
	*48	JD		
	*49	JP		
	50	HY		
	51	JU		
	52	ED		
	*53	FK		
	*54	FL		
	55	FP		
	56	GQ		
	57	GR		
	58	CR		
	59	JT		
	60		U60	
	62	AL		
	66	JA		
3810	01	AH	U68	
	24	DA	M65	
3900	65	KS	F15	
3920	71	LL	F12	
4100	01	AH	U68	
	24	DA	M65	

FOOT NOTES:
#01: Muncie S68 is 96% of Bezares 01
#15: FS-3005C /3205C /4005C /4205C; CL-457
#22: FS-5005C /5205C; 397V; CL-557; CL-559C
#39: T18; T19; T98 - #41: T18A /B /C; T19A /D

* Check Availability

Input Gear

Cross Reference

PTO Series	Bezares	Chelsea	Muncie	Notes
4110	01	AH	U68	
	24	DA	M65	
6000	01	AH	U68	
	02	AB	U57	
	17	ES	F63	
	24	DA	M65	
	34	FN	S71	
	42	JW	F66	
	51	JU		

PTO Series	Bezares	Chelsea	Muncie	Notes
6005	24	DA	M65	
6800	01	AH	U68	
	02	AB	U57	
	17	ES	F63	
	24	DA	M65	
	34	FN	S71	
	42	JW	F66	
	51	JU		

PTO Series	Bezares	Chelsea	Muncie	Notes
8000	01	AH	U68	
	02	AB	U57	
	24	DA	M65	
8500	01	AH	U68	
	24	DA	M65	

Assembly

PTO Series	Bezares	Chelsea	Muncie
1000	1	3	1
	2	4	2
	3	5	3
	4	6	4
1010	1	3	1
	2	4	2
	3	5	3
	4	6	4
2000	1	3	1
	2	4	2
	3	5	3
	4	6	4
2010	1	3	1
	2	4	2
	3	5	3
	4	6	4
3000	3	5	
3100	1		1
	3		3

PTO Series	Bezares	Chelsea	Muncie
3131	1	3	1
	3	5	3
3131RP	1	3	
	3	5	
3151	1	3	1
	3	5	3
3190	1		1
	3		3
3200	1	3	
	3	5	
3252	1	3	1
	3	5	3
3300	1	3	1
	3	5	3
3800	1	3	1
	3	5	3
3810	1	3	1
	3	5	3

PTO Series	Bezares	Chelsea	Muncie
3900	4	2	4
3920	3	4	3
4100	1	3	1
	3	5	3
4110	1	3	1
	3	5	3
6000	1	5	
		4	
	2		2
	3		3
6005	1	5	
		4	
6800	2	4	2
	3	5	3
8000	2	4	2
	3	5	3
8500	1	3	1
	3	5	3

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

PTO Series	Bezares	Chelsea	Muncie	Notes
1000	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	M	M	M	
	N	T	P	ORDER WITH AK127X (COMBO CAB CONTROL W/O KICK OUT)
		S		ORDER WITH AK126X (COMBO CAB CONTROL W/ KICK OUT)
		P		
		V		
	P		E	
	W	W	C	
1010	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	M	M	M	
	N	T	P	ORDER WITH AK127X (COMBO CAB CONTROL W/O KICK OUT)
		S		ORDER WITH AK126X (COMBO CAB CONTROL W/ KICK OUT)
		P		
		V		
	P		E	
	W	W	C	
2000	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	M	M	M	
	N	T	P	ORDER WITH AK127X (COMBO CAB CONTROL W/O KICK OUT)
		S		ORDER WITH AK126X (COMBO CAB CONTROL W/ KICK OUT)
		P		
		V		
	P		E	
	W	W	C	
2010	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	M	M	M	
	N	T	P	ORDER WITH AK127X (COMBO CAB CONTROL W/O KICK OUT)
		S		ORDER WITH AK126X (COMBO CAB CONTROL W/ KICK OUT)
		P		
		V		
	P		E	
	W	W	C	
3000	E	B		
	F	D		special order 24 volt coil (STANDARD IS 12 VOLT)
	N	S		ORDER WITH AK126X (COMBO CAB CONTROL W/ KICK OUT)
		T		ORDER WITH AK127X (COMBO CAB CONTROL W/O KICK OUT)
	V	N		
3100	E		H	Muncie H shift on CS10/24/41 series is integral to rear cover
	F		J	special order 24 volt coil (STANDARD IS 12 VOLT)
3131	E	G	H	
		B		
		K		
	F	L	J	
		D		
		H		

Shifter

Cross Reference

PTO Series	Bezares	Chelsea	Muncie	Notes
3131RP	E	K		
		G		
		B		
	F	H		
		L		
		D		
3151	M	M	M	
3200	A	A		INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	V		
	P	P		
3252	E	B	H	
	F	D	J	SPECIAL ORDER 24 VOLT COIL (STANDARD IS 12 VOLT)
3300	E	B	S	MUNCIE S SHIFT HAS DROP IN SOLENOID CLEARANCE ISSUES ON AISIN AUTOMATICS
			H	MUNCIE H SHIFT ON CS6B HAS REMOTE SOLENOID
	F	D		
	T	E		
	V	N		
3800	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	V	P	
3810	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	V	P	
3900	E	B	H	
3920	E	B	6	
		K	D	
4100	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	T	P	ORDER WITH AK127X (COMBO CAB CONTROL W/O KICK OUT)
		V		
		S		ORDER WITH AK126X (COMBO CAB CONTROL W/ KICK OUT)
4110	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	T	P	ORDER WITH AK127X (COMBO CAB CONTROL W/O KICK OUT)
		V		
		S		ORDER WITH AK126X (COMBO CAB CONTROL W/ KICK OUT)
6000	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	V		
6005	A	A		INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	V		
6800	A	A	A	INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	V		
8000	N	Y	L	BZ 8000 SERIES: ONLY PNEUMATIC VERSION
8500	A	A	T	INCLUDES AK101X (ON/OFF CAB CONTROL)
	N	V		

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

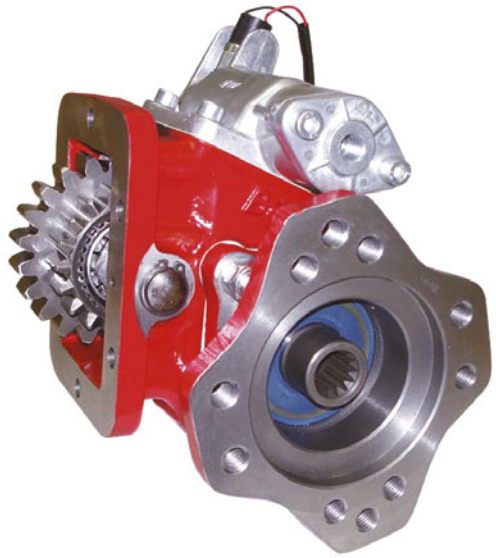
Index

PTO Series	Pag.
1000	24
2000	28
3000	32
3131	35
3131RP	38
3190	40
3151	43
3200	46
3252	49
3300	52
3800	55
3900	58
3920	60
4100 & 4110	62
4250	65
6000	68
6800	71
8000	74
8500	77
95X13EIB	80
120X13DSB	82
AD_ _ _	84
AD-622	86
AD-68248	87
Tech. Info	88

PTO Series

SAE Six Hole, Two Gear-Single Speed
Lateral 6 tal. 2 Engranajes

Pneumatic
Neumático



Description Descripción

The 1000 Series PTO has been engineered to work with most of the existing transmissions in the market. It is a very durable PTO with a wide range of input gears, shifters, speed ratios and output shafts to meet all of the market applications.

La serie 1000 ha sido diseñada para funcionar en la mayoría de las transmisiones existentes en el mercado. Se trata de una toma de fuerza muy duradera con una amplia gama de engranajes de mando, accionamientos, relaciones de velocidad y ejes de salida para satisfacer todas las aplicaciones del mercado.

Main Data Datos Principales	
Mounting position Lado de montaje	Right, Left Derecho, Izquierdo
Weight Peso (Lb)	32

Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)

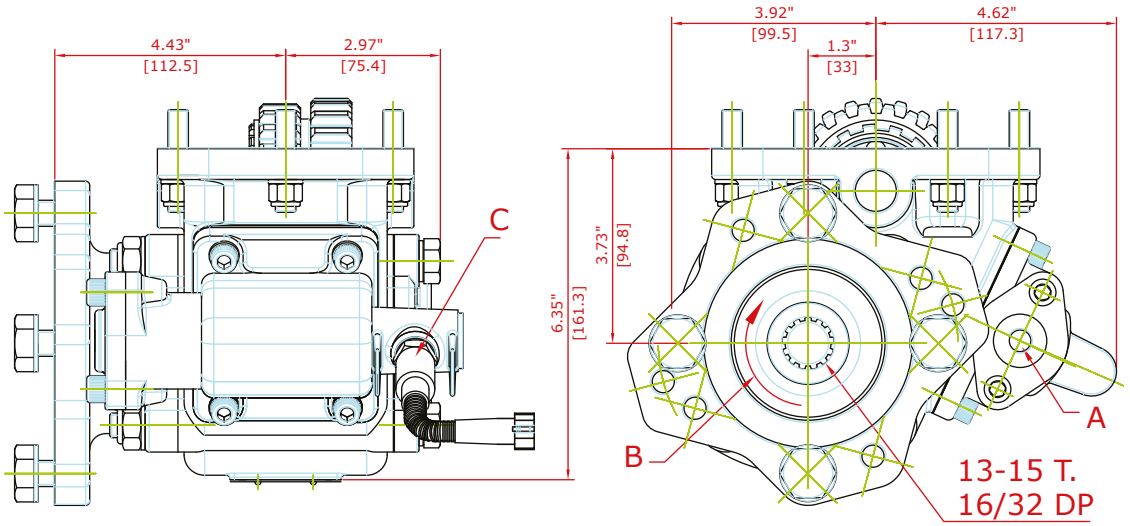
INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m
55%(B)	250	25	49	178	18	35
73%(C)	250	25	49	178	18	35
86%(E)	225	22	44	160	16	31
95% (J)	225	22	44	160	16	31
125% (O)	200	20	39	142	14	28
137% (R)	200	20	39	142	14	28
150% (S)	190	19	37	135	13	26
165% (T)	175	17	34	124	12	24

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE Six Hole, Two Gear-Single Speed
Lateral 6 tal. 2 Engranajes


1000 Series

Pneumatic
Neumático




Mechanic Mecánico

Cable Shift
Acc. por cable integrado



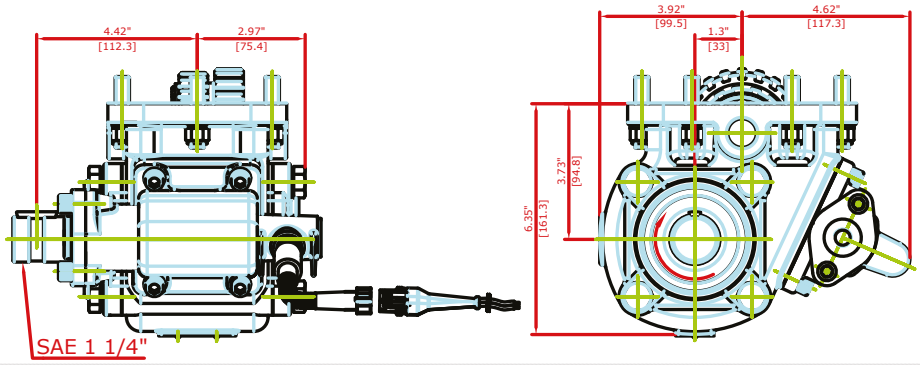
Wire Shift
Acc. por cable exterior



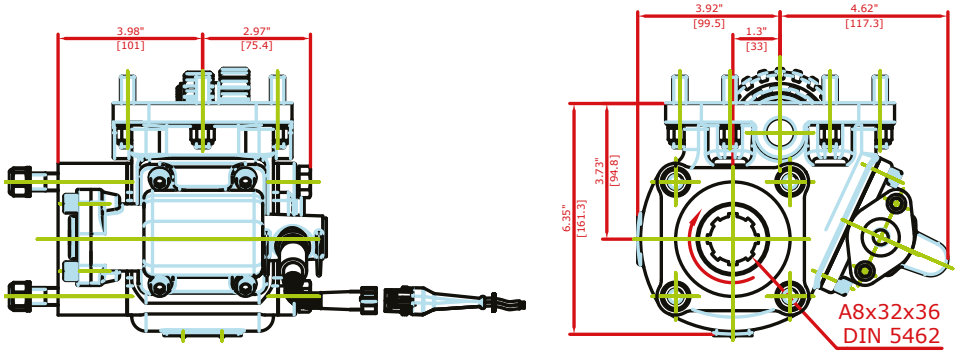
Notes		Notas	
A	Air connection, thread 1/4" BSP	A	Toma de aire, 1/4" GAS
B	Rotation	B	Sentido de giro
C	Indicator switch	C	Indicador de funcionamiento
D	Cable shift	D	Accionamiento por cable integrado
E	Wire shift	E	Accionamiento por cable exterior

SAE Six Hole, Two Gear-Single Speed
Lateral 6 tal. 2 Engranajes

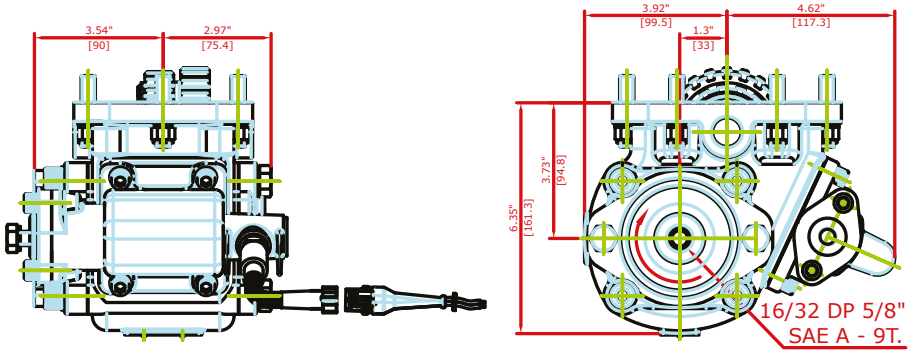
Round shaft Eje chaveteado



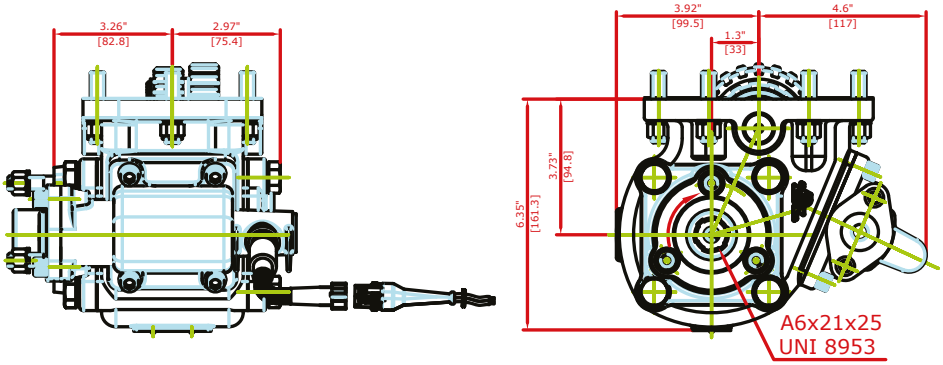
ISO 4 bolt ISO 4 taladros



SAE “A” 2 bolt SAE “A” 2 taladros



UNI 3 bolts 6T UNI 3 aladros 6T



Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE Six Hole, Two Gear-Single Speed
Lateral 6 tal. 2 Engranajes

Pneumatic
Neumático

Part Number Breakdown Codificación PTO

1000 X J N 01 1 RA

SERIES:
1000 Standard Mounting, 6 bolt
1010 Deep mount, 6 bolt

VERSIONS:
X Standard
G Greaseable Output Shaft
P Oil pressure lube idler Shaft

INTERNAL RATIOS:
1:0.55 (B)	→	801034
1:0.73 (C)	→	800534
1:0.8 (E)	→	800634
1:0.95 (J)	→	800734
1:1.25 (O)	→	800834
1:1.37 (R)	→	801334
1:1.50 (S)	→	801434
1:1.65 (T)	→	800934

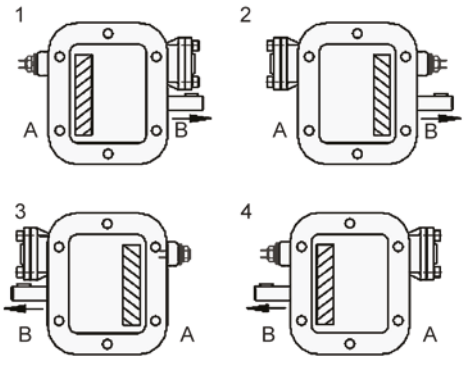
SHIFTER TYPE:
C Cable
W Wire with 10' Cable
F Electric 24V
M Constant Mesh
N Air without 101 Air Kit

Shifter type	Pos 1/4	Pos 2/3
C	902099	903599
N	902299	903899

INPUT GEAR:
01 Fuller series (R/675)
02 Universal (R/683))
03 Spicer (R/736)
05 Spicer (R/677)
06 Fuller (TREMEC) (R/679)
07 Navistar (R/693)
08 Spicer (R/682)
09 Spicer (R/684)
10 Chevy (R/678)
11 Chevy / Spicer (R/699)
13 New Process (R/718)
14 Fuller (R/737)
15 Eaton / Fuller FS-4005C/4205C (R/717)
16 ZF (R/716)
17 Eaton 6305 A (R/680)
18 Eaton FS 3005 / 4005 AB (R/717)
20 Dodge (R/701)
21 ZF S5-42/5.72 (R/676)
22 Eaton / Fuller (R/738)
23 Eaton / Fuller FS-3005 B (R/714)
24 Mack (R/695)
25 Eaton / Fuller FS 7206 A (R/715)
27 Eaton / Fuller (R/692)
28 Fuller (R/771)
30 Eaton / Fuller (R/698)
33 Spicer (R/697)
34 Spicer (R/696)
36 New Process (R/739)
39 Warner (R/741)
41 Warner (R/743)
42 Fuller (R/770)
50 ZF (R/694)
51 Dodge (R/702)
52 Zed / F (R/700)
55 Mack / Renault (R/748)
56 Tremec (R/744)
57 ZF (R/740)
61 Ford (R/754)
64 Allison (R/752)
66 Fuller (R/862)
67 Aisin (R/870)
68 Tremec (R/897)
70 Mercedes G60 (R/956)
72 Eaton/Fuller RTS(O) 11909A (G/054)

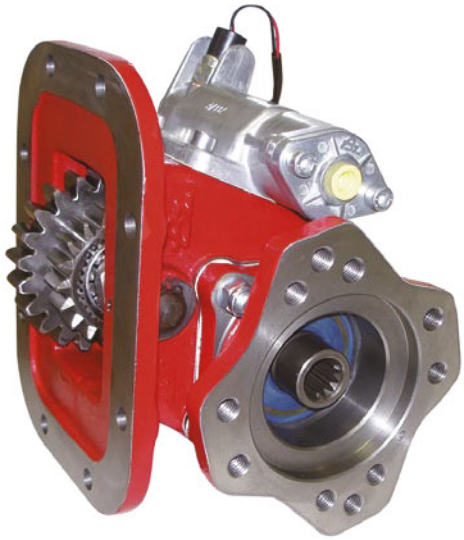
OUTPUT TYPE:
DA ISO 4 bolt
IA Flange SAE 1100
IB Flange SAE 1300
IC Flange SAE 1400
SE SAE Type 1 1/4" round shaft
SF SAE "A" 2 bolt 9T
SH SAE "AA" 2 bolt 11T
RA SAE "B" 2/4 bolt 13T. rotatable
RB SAE "BB" 2/4 bolt 15T. rotatable
TP Tyron pump (Chelsea type)
UN ***UNI 3 bolts 6T***

ASSEMBLY ARRANGEMENTS:
1 Right, Forward
2 Right, Rear
3 Left, Forward
4 Left, Rear



SAE Eight Hole, Two Gear-Single Speed
Lateral 8 tal. 2 Engranajes

Pneumatic
Neumático



Description Descripción

The 2000 Series PTO has been engineered to work with most of the existing transmissions in the market. It is a very durable PTO with a wide range of input gears, shifters, speed ratios and output shafts to meet all of the market applications.

La serie 2000 ha sido diseñada para funcionar en la mayoría de las transmisiones existentes en el mercado. Se trata de una toma de fuerza muy duradera con una amplia gama de engranajes de mando, accionamientos, relaciones de velocidad y ejes de salida para satisfacer todas las aplicaciones del mercado.

Main Data Datos Principales		
Mounting position Lado de montaje	Bottom, Right, Left	Inferior, Derecho, Izquierdo
Weight Peso (Lb)	34	

Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)

INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
50%(A)	250	25	49	178	18	35
55%(B)	250	25	49	178	18	35
73%(C)	250	25	49	178	18	35
86%(E)	225	22	44	160	16	31
95% (J)	225	22	44	160	16	31
125% (O)	200	20	39	142	14	28
137% (R)	200	20	39	142	14	28
150% (S)	190	19	37	135	13	26
165% (T)	175	17	34	124	12	24

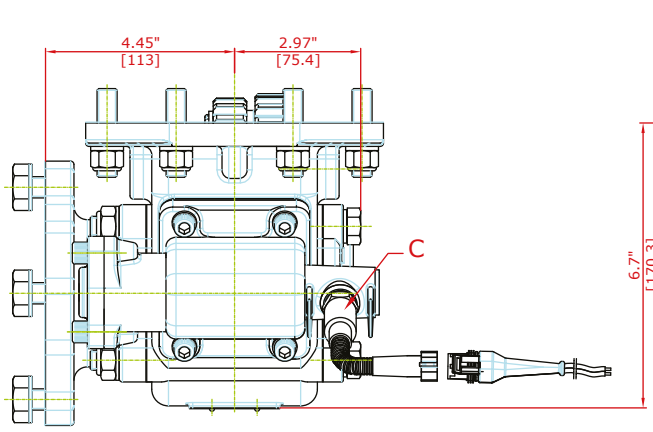
Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

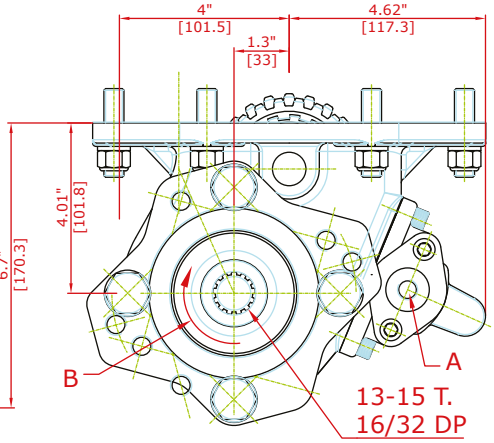
bezaresusa

SAE Eight Hole, Two Gear-Single Speed
Lateral 8 tal. 2 Engranajes

2000 Series


Pneumatic
Neumático






Mechanic Mecánico

Cable Shift
Acc. por cable integrado



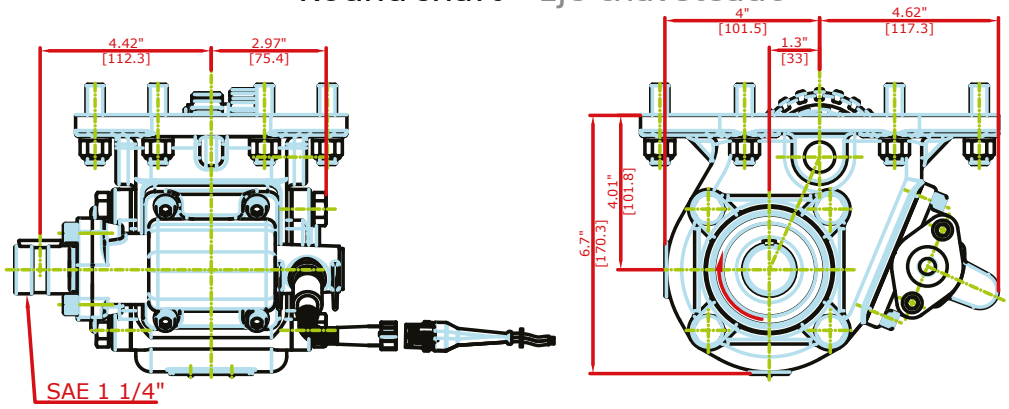
Wire Shift
Acc. por cable exterior



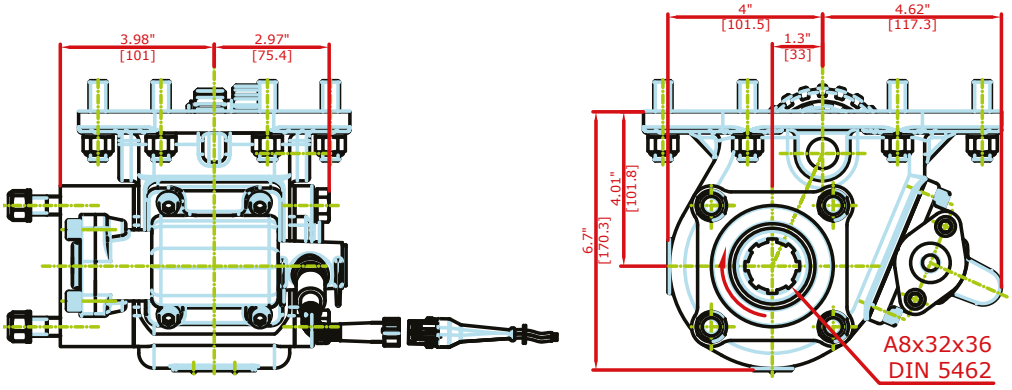
Notes		Notas	
A	Air connection, thread 1/4" BSP	A	Toma de aire, 1/4" GAS
B	Indicator switch	B	Indicador de funcionamiento
C	Rotation	C	Sentido de giro
D	Wire shift	D	Accionamiento por cable exterior
E	Cable shift	E	Accionamiento por cable integrado

SAE Eight Hole, Two Gear-Single Speed
Lateral 8 tal. 2 Engranajes

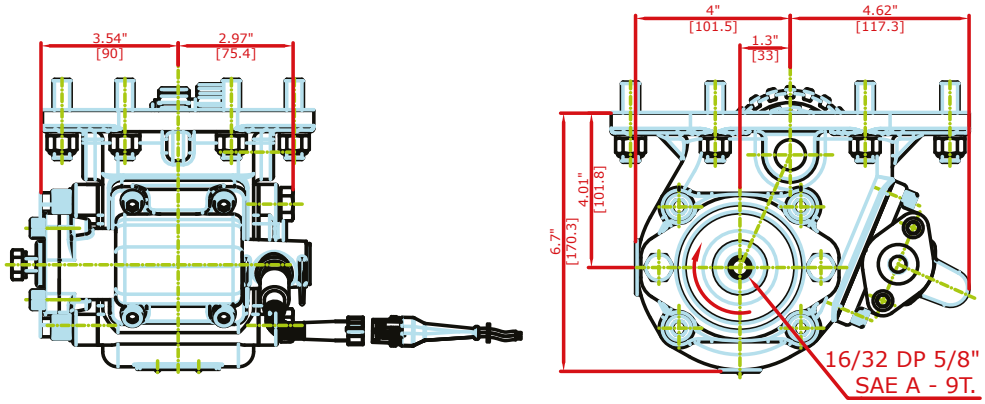
Round shaft Eje chaveteado



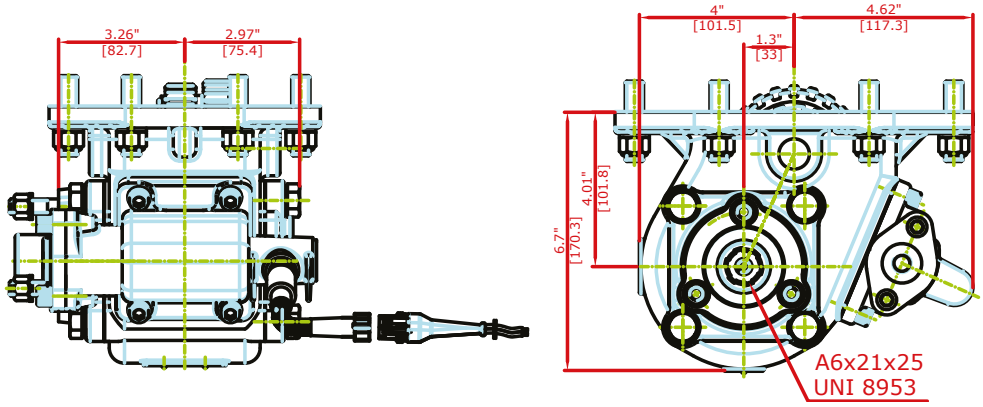
ISO 4 bolt ISO 4 taladros



SAE "A" 2 bolt SAE "A" 2 taladros



UNI 3 bolts 6T UNI 3 taladros 6T



Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

SAE Eight Hole, Two Gear-Single Speed
Lateral 8 tal. 2 Engranajes

Pneumatic
Neumático

Part Number Breakdown Codificación PTO

2000 X J N 01 1 RA

SERIES:
2000 Standard Mounting, 8 bolt
2010 Deep Mounting, 8 bolt

VERSIONS:
X Standard
G Greaseable Output Shaft
P Oil pressure lube idler Shaft

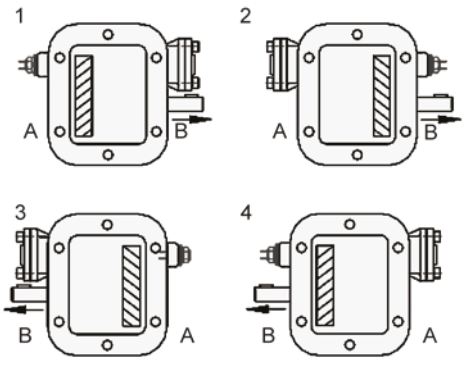
INTERNAL RATIOS:
1:0,50 (A)	→	PT801534
1:0.55 (B)	→	PT801034
1:0.73 (C)	→	PT800534
1:0.8 (E)	→	PT800634
1:0.95 (J)	→	PT800734
1:1.25 (O)	→	PT800834
1:1.37 (R)	→	PT801334
1:1.50 (S)	→	PT801434
1:1.65 (T)	→	PT800934

SHIFTER TYPE:
W Wire with 10' Cable
F Electric 24V
M Constant Mesh
N Air without 101 Air Kit

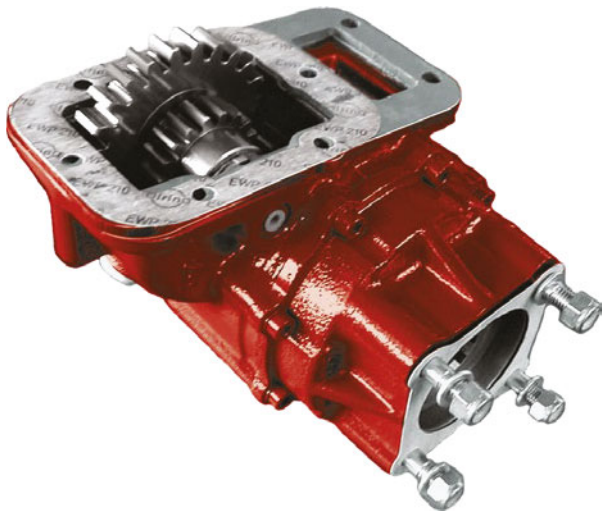
INPUT GEAR:
01 Fuller series (R/675)
02 Universal (R/683))
03 Spicer (R/736)
05 Spicer (R/677)
06 Fuller (TREMEC) (R/679)
07 Navistar (R/693)
08 Spicer (R/682)
09 Spicer (R/684)
10 Chevy (R/678)
11 Chevy / Spicer (R/699)
13 New Process (R/718)
14 Fuller (R/737)
15 Eaton / Fuller FS-4005C/4205C (R/717)
16 ZF (R/716)
17 Eaton 6305 A (R/680)
18 Eaton FS 3005 / 4005 AB (R/717)
20 Dodge (R/701)
21 ZF S5-42/5.72 (R/676)
22 Eaton / Fuller (R/738)
23 Eaton / Fuller FS-3005 B (R/714)
24 Mack (R/695)
25 Eaton / Fuller FS 7206 A (R/715)
27 Eaton / Fuller (R/692)
28 Fuller (R/771)
30 Eaton / Fuller (R/698)
33 Spicer (R/697)
34 Spicer (R/696)
36 New Process (R/739)
39 Warner (R/741)
41 Warner (R/743)
42 Fuller (R/770)
50 ZF (R/694)
51 Dodge (R/702)
52 ZF (R/694)
55 Mack / Renault (R/748)
56 Tremec (R/744)
57 ZF (R/740)
61 Ford (R/754)
64 Allison (R/752)
66 Fuller (R/862)
67 Aisin (R/870)
68 Tremec (R/897)
70 Mercedes G60 (R/956)
75 Endurant HD (G/210)
77 Endurant XD, XD Pro (G/227)

OUTPUT TYPE:
DA ISO 4 bolt
FA Flange SAE 1100
IB Flange SAE 1300
IC Flange SAE 1400
SE SAE Type 1 1/4" round shaft
SF SAE "A" 2 bolt 9T
SH SAE "AA" 2 bolt 11T
RA SAE "B" 2/4 bolt 13T. rotatable
SG SAE B 2/4 bolt 14T. rotatable
RB SAE "BB" 2/4 bolt 15T. rotatable
TP Tyron pump (Chelsea type)
UN ***UNI 3 bolts 6T***
SG SAE B 2/4 bolt 14T rotatable

ASSEMBLY ARRANGEMENTS:
1 Right, Forward
2 Right, Rear
3 Left, Forward
4 Left, Rear



Side Mount Pneumatic / Hydraulic
Lateral Neumático / Hidráulico



Description Descripción

Hot Shift Power Take-off, 2 gears. Pneumatic and Hydraulic shifting. Mounting on both sides of the Transmission. Low profile housing, easy to change from pneumatic to hydraulic changing only the connection end cover.

Toma de fuerza 2 piñones con embrague incorporado. Accionamiento neumático e hidráulico. Montaje sobre ambos lados de la caja de cambios. Diferentes relaciones de transmisión. Carcasa de perfil bajo.

Main Data Datos Principales	
Mounting position Lado de montaje	Right, Left Derecho, Izquierdo
Weight Peso (Lb)	55

Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)

INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
33%(B)	310	30	59	230	22	44
42%(C)	310	30	59	230	22	44
50%(E)	280	26	53	210	20	40

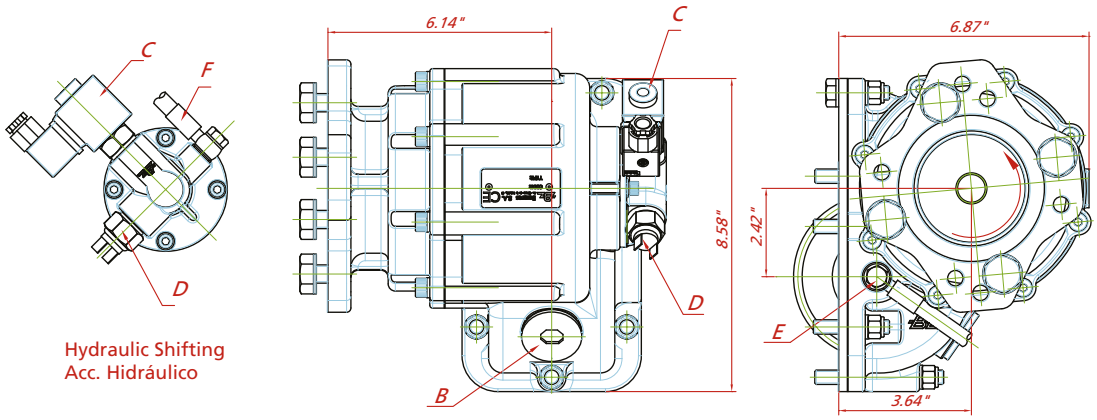
Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

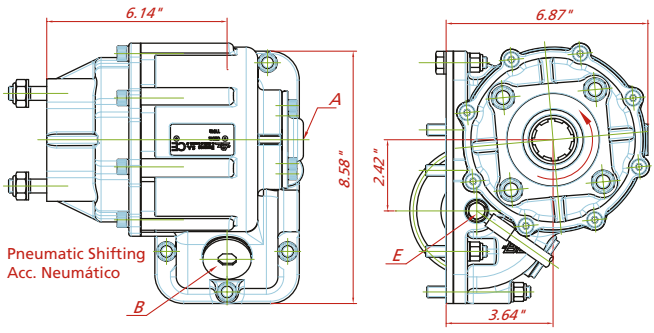
Side Mount Pneumatic / Hydraulic
Lateral Neumático / Hidráulico

Most standard output types Tipos de salida más utilizadas

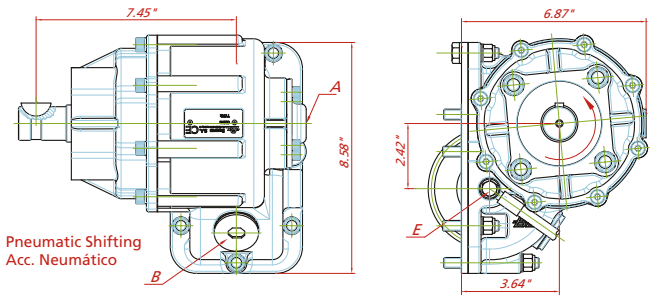
SAE "B"



ISO 4 bolt ISO 4 taladros



Round shaft Eje chaveteado



	Notas		Notes
A	Engage PTO, thread 1/4" BSP	A	Conexión PTO, rosca 1/4" GAS
B	Backlash check plug	B	Comprobación juego de engranajes
C	Solenoid standard 12V / Optional 24V .	C	Solenoide estándar 12V / Opcional 24V.
D	Pressure switch.	D	Presostato
E	Lubrication hose P/N 9018399.	E	Latiguillo lubricación 9018399.
F	Shiftimg hose (P/N. 9019499) (only for hydraulic version).	F	Latiguillo accionamiento (9019499) (solo versión hidráulica)

Side Mount Pneumatic / Hydraulic
Lateral Neumático / Hidráulico

Part Number Breakdown Codificación PTO

3000 P B N 60 3 RA

SERIES:

3000 Allison 6 bolts

VERSIONS:

P Pressure lube

INTERNAL RATIOS:

B (34%)
C (42%)
E (50%)

SHIFTER TYPE:


N Air without 101 air Kit
E Electric 12V. over Hydraulic
F Electric 24V. over Hydraulic

OUTPUT TYPE:

DA ISO 4 bolt
RA SAE "B" 2/4 bolt 13T. rotatable
RJ SAE C. 4 bolt
SE SAE type 1 1/4" round shaft

ASSEMBLY ARRANGEMENT:

3 Left, Forward



INPUT GEAR:

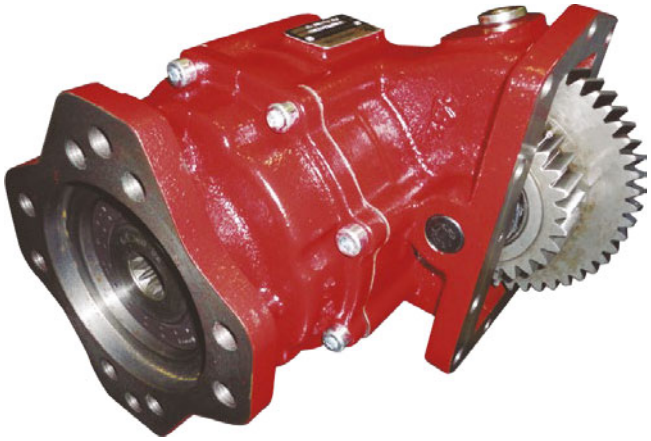
60 Allison 2300 / 3000 series

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

MD-3000/3060/3066/3070/3200/3500/3560
HD-4000/4060/4500/4560/4700/4800

3131 Series



Description Descripción

Hot Shift Power Take-off, 2 gears, Hydraulic shifting and internal lubrication. Mounting on both sides of the Gearbox. Wide range of internal ratios and most standard output flanges: SAE B, BB, C or ISO 4 bolts.

Toma de fuerza de 2 piñones, con embrague incorporado, accionamiento hidráulico y lubricación interna. Montaje sobre ambos lados de la caja de cambios. Amplia gama de relaciones internas. Disponible con tipos de salida: SAE B, BB, C o ISO 4 taladros.

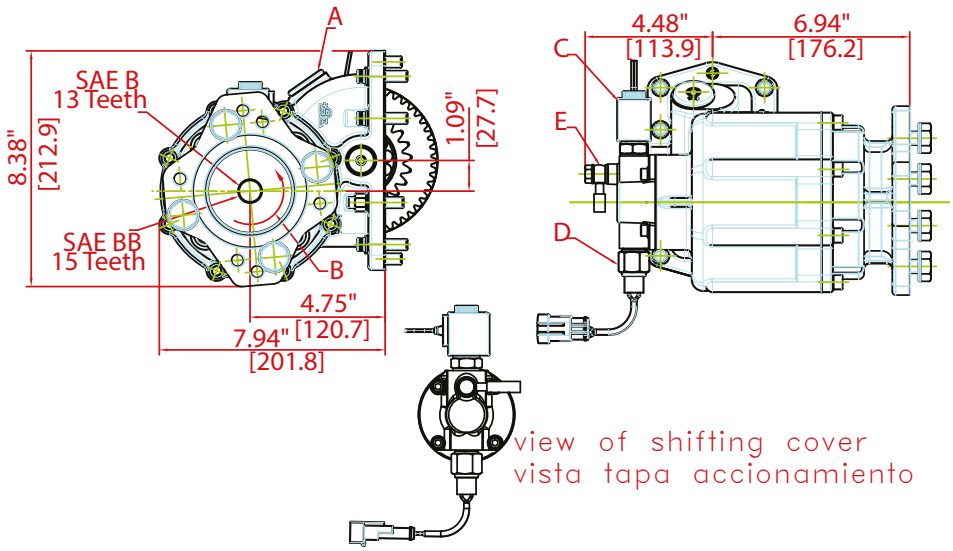
Main Data Datos Principales	
Mounting position Lado de montaje	Right, Left Derecho, Izquierdo
Weight Peso (Lb)	60

Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)

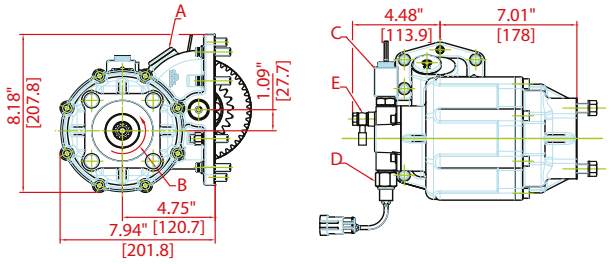
INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
50%(B)	500	48	97	400	39	78
58%(C)	500	48	97	400	39	78
68%(E)	450	44	88	360	35	70
78% (G)	420	40	80	340	33	65
84% (J)	400	38	76	320	30	60
97% (M)	380	36	72	300	28	56
119% (O)	350	33	66	280	26	52

Most standard output types Tipos de salida más utilizadas

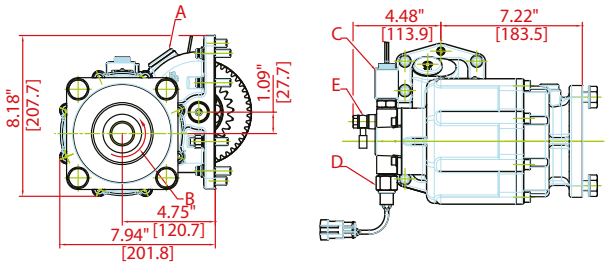
SAE "B" 2/4 bolt SAE "B" 2/4 taladros



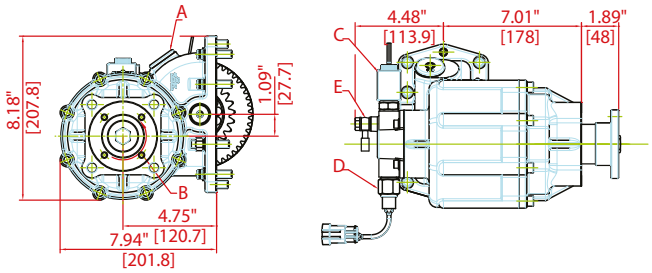
ISO 4 bolt ISO 4 taladros



SAE "C" 4 bolt SAE "C" 4 taladros



Drive flange Plato de transmisión



	Notas		Notes
A	Backlash check plug	A	Comprobación juego de engranajes
B	Rotation	B	Sentido de giro
C	Solenoid 14V DC (24V DC Optional)	C	Solenoide 14V DC (24V DC Opcional)
D	Pressure switch	D	Presostato
E	Shifting hose	E	Latiguillo accionamiento

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

Side Mount Pneumatic / Hydraulic
Lateral Neumático / Hidráulico

Part Number Breakdown Codificación PTO

3131 P B E 63 3 RA

SERIES:

3131 Allison 10 bolts

VERSIONS:

P Pressure lube idler

INTERNAL RATIOS:

(B) 34%
(C) 58%
(E) 68%
(G) 78%
(J) 84%
(M) 97%
(O) 119%

SHIFTER TYPE:

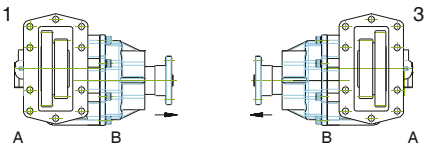
E Electric 14V. over Hydraulic
F Electric 24V. over Hydraulic
T Electric 14V. over hydraulic, without wiring kit
V Electric 24V. over hydraulic, without wiring kit

OUTPUT TYPE:

RA SAE "B" 2/4 bolt 13T. rotatable
RB SAE "BB" 2/4 bolt 15T. rotatable
RJ SAE "C" 4 bolt 14T
DA ISO 4 bolt
IB Flange SAE 1310
IC Flange SAE 1410
ID Flange DIN 100

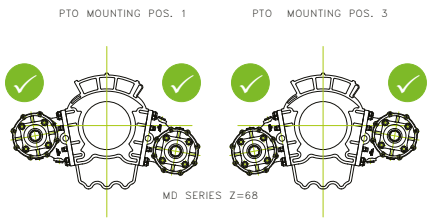
ASSEMBLY ARRANGEMENTS:

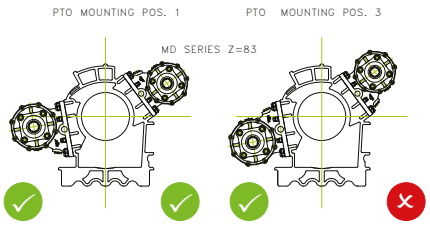
1 Right, Forward
3 Left, Forward

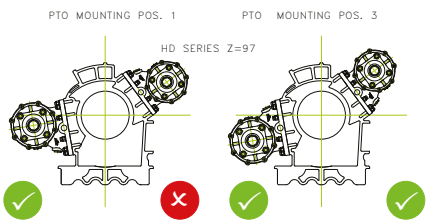


INPUT GEAR:

63 Allison

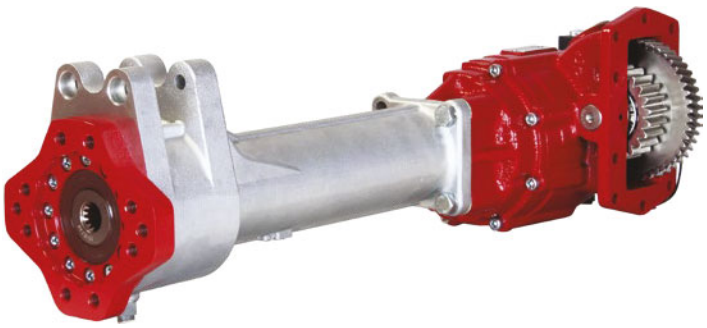






MD-3000/3060/3066/3070/3200/3500/3560
HD-4000/4060/4500/4560/4700/4800

Rear Pump
Bomba Posterior



Description Descripción

Hot Shift Power Take-off, 2 gears, with prolongated shaft for rear pump. Hydraulic shifting and internal lubrication. Mounting on both sides of Gearbox. Wide range of internal ratios.

Toma de fuerza de 2 piñones, con embrague incorporado y eje prolongado para montaje posterior de bomba. Accionamiento hidráulico y lubricación interna. Montaje sobre ambos lados de la caja de cambios. Amplia gama de relaciones internas.

Main Data Datos Principales	
Mounting position Lado de montaje	Left / Right / Top Derecho / Izquierdo / Superior
Weight Peso (Lb)	63Lb (29 kg)

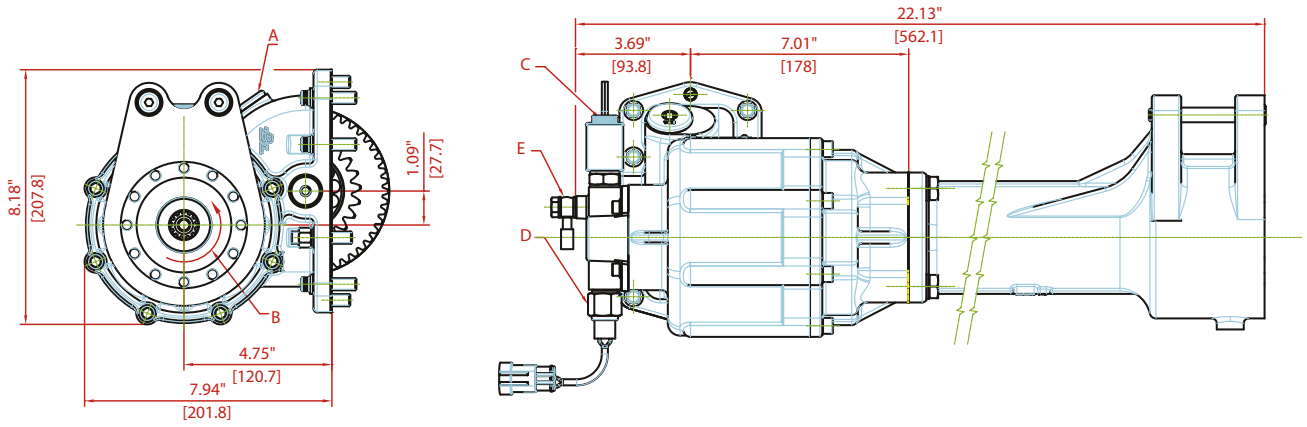
Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)

INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
50%(B)	500	48	97	400	39	78
58%(C)	500	48	97	400	39	78
68%(E)	450	44	88	360	35	70
78% (G)	420	40	80	340	33	65
84% (J)	400	38	76	320	30	60
97% (M)	380	36	72	300	28	56
119% (O)	350	33	66	280	26	52

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Rear Pump
Bomba Posterior

Main Dimensions Dimensiones principales



Notes		Notas	
A	Backlash check plug	A	Tapón comprobación juego engranajes
B	Pump Rotation.	B	Sentido de giro
C	Solenoid 14V DC (24V DC Optional)	C	Solenoide 14V DC (24V DC Opcional)
D	Pressure switch	D	Presostato
E	Shifting hose	E	Latiguillo accionamiento

Part Number Breakdown Codificación PTO

3131 P B E 63 3 RP

SERIES:

3131 Allison 10 bolts

VERSIONS:

P Pressure lube idler

INTERNAL RATIOS:

50% (B) **68% (E)** **84% (J)** **119% (O)**
58% (C) **78% (G)** **97% (M)**

SHIFTER TYPE:


E Electric 14V. over hydraulic
F Electric 24V. over hydraulic
T Electric 14V. over hydraulic, without wiring kit
V Electric 24V. over hydraulic, without wiring kit

OUTPUT TYPE:

RP Rear Pump

ASSEMBLY ARRANGEMENTS:

1 Right, Forward
3 Left, Forward



INPUT GEAR:

63 Allison

NOTE: rear pump adapter and bracket must be ordered separately.
NOTA: el adaptador a bomba posterior y el soporte correspondiente se piden por separado

MD-3000/3060/3066/3070/3200/3500/3560
HD-4000/4060/4500/4560/4700/4800

Rear Pump Adapters
Adaptadores Bomba Posterior



Description Descripción

Prolongued Shaft adapter permits mounting heavy pumps the rear adapter flange. Mounting on both sides of Gearbox. Rotatable flange for a better mounting position of the pump. Outputs available : SAE B, SAE BB, SAE C or ISO 4 bolts. Must be fitted with 3131 PTO special RP output.

Adaptador de eje prolongado, permite montar bombas pesadas sobre su brida posterior. Montaje a ambos lados de la caja de cambios. Su brida rotativa permite una posición mejor de montaje para la bomba. Disponible con salida: SAE B, SAE BB, SAE C o ISO 4. Debe montarse junto con la toma de fuerza 3131 de salida especial RP.

Main Data Datos Principales	
Mounting position Lado de montaje	Left / Right / Top Derecho / Izquierdo / Superior
Weight Peso (Lb)	28Lb (13 kg)

Consult Torque and Power data in 3131 Rear Pump Technical Data Sheet
Consulte datos de Par y Potencia en la Ficha Técnica de 3131 bomba posterior

Part Number Breakdown Codificación

3190 RA

SERIES:

3190 Bomba posterior Allison
Allison rear pump

OUTPUT TYPE:

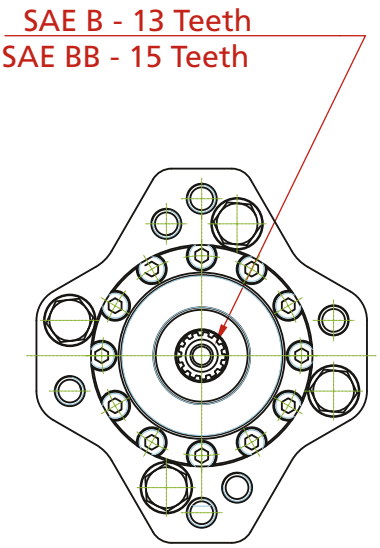
RA SAE "B" 2/4 bolt 13T. rotatable
RB SAE "BB" 2/4 bolt 15T. rotatable
RK SAE "C" 2/4 bolt 14T. rotatable
DA ISO 4 bolt

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

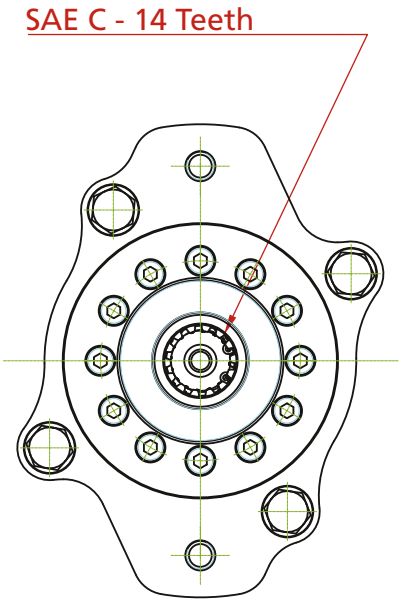
Rear Pump Adapters
Adaptadores Bomba Posterior

Most standard output types Tipos de salida más utilizadas

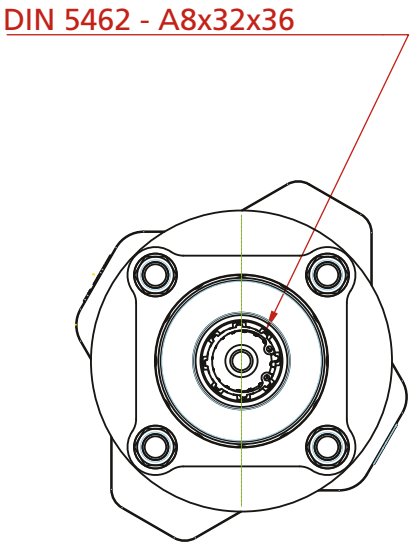
SAE "B" or / o "BB" 2/4 bolts / taladros



SAE "C" 2/4 bolts / taladros + PTO



ISO 4 bolts / taladros + PTO




Allison Gearbox Caja Allison	Mounting side & availability Lado de montaje y disponibilidad					
	Left Izquierdo*		Right Derecho*		Top Right Superior Derecho*	
	Up shaft Eje arriba	Bottom shaft Eje abajo	Up shaft Eje arriba	Bottom shaft Eje abajo	Up shaft Eje arriba	Bottom shaft Eje abajo
3000 (MH /RDS /TRV)	**9076899**	**9070799**	**9076999**	**9075899**	N/A	N/A
3000 (MH /RDS /TRV) + cooler	✗	✗	**9076999**	✗	N/A	N/A
3000 (MH /RDS /TRV) + retarder	✗	**9076399**	✗	✗	N/A	N/A
MD-3050P, MD-5550P, MD-3060P, MD-3560P, MD-3070P	✗	**9070799**	✗	**9075899**	N/A	N/A
MD-3050P, MD-5550P, MD-3060P, MD-3560P, MD-3070P + cooler/retarder	✗	✗	✗	✗	N/A	N/A
MD-3066P	✗	**9070799**	✗	**9075899**	✗	✗
MD-3066P + cooler / retarder	✗	✗	N/A	N/A	✗	✗
MD-3000 EVS, MD-3500 EVS	✗	**9070799**	N/A	N/A	✗	✗
MD-3000 EVS, MD-3500 EVS + cooler / retarder	✗	**9070799**	N/A	N/A	✗	**9075899**
4000 (EVS /MH /RDS /TRV) 4500 (EVS /RDS)	✗	**9071399**	N/A	N/A	✗	**9075999**
4000 (EVS /MH /RDS /TRV) 4500 (EVS /RDS) + retarder	**9076699**	✗	N/A	N/A	✗	**9076599**
4000 (EVS /MH /RDS /TRV), 4500 (EVS /RDS) + cooler	**9085799**	✗	N/A	N/A	✗	✗

(*) Bracket is not included, please order separately. Soporte no incluido, solicítelo por separado.

Rear Pump Brackets Kits
Adaptadores Bomba Posterior


Allison 3000 series

3000 (MH /RDS /TRV) P/N. 9070799



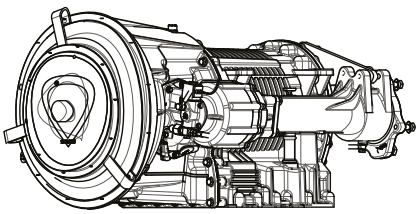
(Shaft Bottom)

3000 (MH /RDS /TRV) P/N. 9075899



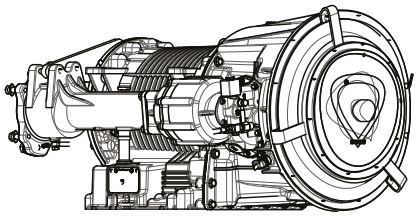
(Shaft Bottom)

3000 (MH /RDS /TRV) P/N. 9076899




(Shaft Up)

3000 (MH /RDS /TRV) P/N. 9076999



(Shaft Up)


3000 (MH /RDS /TRV) + Retarder P/N. 9076399



(Shaft Bottom)


Allison 4000 series

4000 (EVS /MH /RDS /TRV) 4500 (EVS /RDS) P/N. 9071399



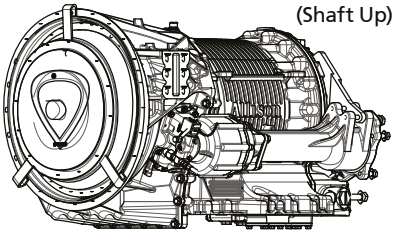
(Shaft Bottom)

4000 (EVS /MH /RDS /TRV) 4500 (EVS /RDS) P/N. 9075999



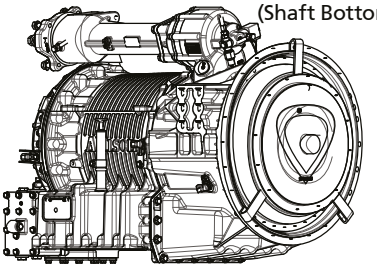
(Shaft Bottom)

4000 (EVS /MH /RDS /TRV) 4500 (EVS /RDS) + Retarder P/N. 9076699



(Shaft Up)

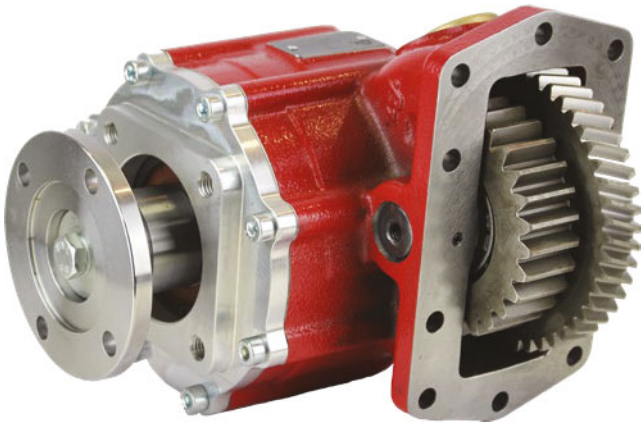
4000 (EVS /MH /RDS /TRV) 4500 (EVS /RDS) + Retarder P/N. 9076599



(Shaft Bottom)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Constant Mesh, Heavy Duty
Toma Constante, Reforzado



Description Descripción

Constant Mesh Power Take-off, 2 gears, internal lubrication. Mounting on both sides of the Transmission. Wide range of internal ratios and standard outputs: SAE C, ISO 4 bolts, and drive flange.

Toma de fuerza de 2 piñones, en toma constante, lubricación interna. Montaje sobre ambos lados de la caja de cambios. Amplia gama de relaciones internas. Disponible con tipos de salida: SAE C, ISO 4 taladros o plato de transmisión.

Main Data Datos Principales	
Mounting position Lado de montaje	Right, Left Derecho, Izquierdo
Weight Peso (Lb)	42

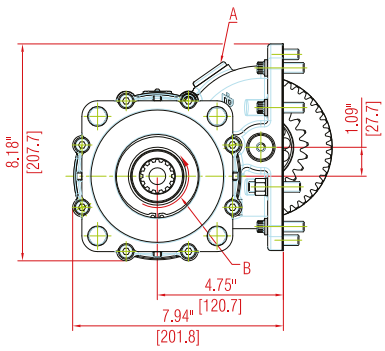
Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)


INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
50%(B)	500	48	97	400	39	78
58%(C)	500	48	97	400	39	78
68%(E)	450	44	88	360	35	70
78% (G)	420	40	80	340	33	65
84% (J)	400	38	76	320	30	60
97% (M)	380	36	72	300	28	56
119% (O)	350	33	66	280	26	52

MD-3000/3060/3066/3070/3200/3500/3560
HD-4000/4060/4500/4560/4700/4800

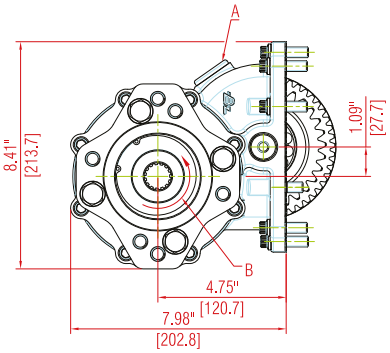
Constant Mesh, Heavy Duty
Toma Constante, Reforzado


SAE “C” 4 bolt SAE “C” 4 taladros



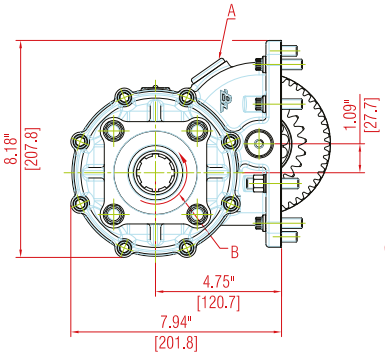



SAE “B” 2/4 bolt SAE “B” 2/4 taladros



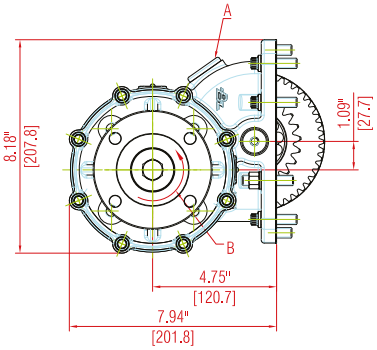



ISO 4 bolt ISO 4 taladros





Drive Flange Plato de Transmisión





	Notas		Notes
A	Backlash check plug	A	Comprobación juego de engranajes
B	Rotation	B	Sentido de giro
C	Lubrication hose (included)	C	Latiguillo de lubricación (incluido)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

Constant Mesh, Heavy Duty
Toma Constante, Reforzado

Part Number Breakdown Codificación PTO

3151 P B M 63 3 RJ

SERIES:

3151 Allison 10 bolts

VERSIONS:

P Pressure lube idler

INTERNAL RATIOS:

50% (B)
58% (C)
68% (E)
78% (G)
84% (J)
97% (M)
119% (O)

SHIFTER TYPE:


M Constant mesh

OUTPUT TYPE:

DA ISO 4 bolt
IC Flange SAE 1410
RJ SAE C. 4 bolt 14T
RA SAE B. 2/4 bolt 13T
RB SAE BB. 2/4 bolt 15T

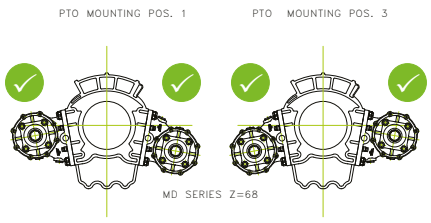
ASSEMBLY ARRANGEMENTS:

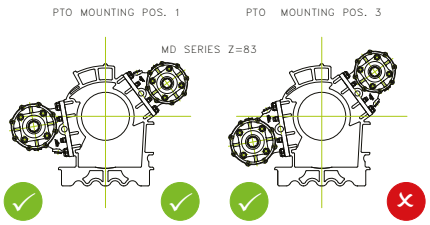
1 Right, Forward
3 Left, Forward

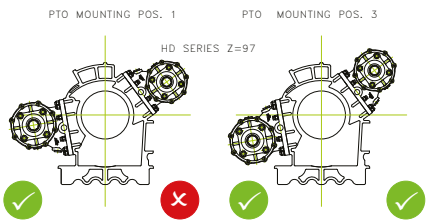


INPUT GEAR:

63 Allison

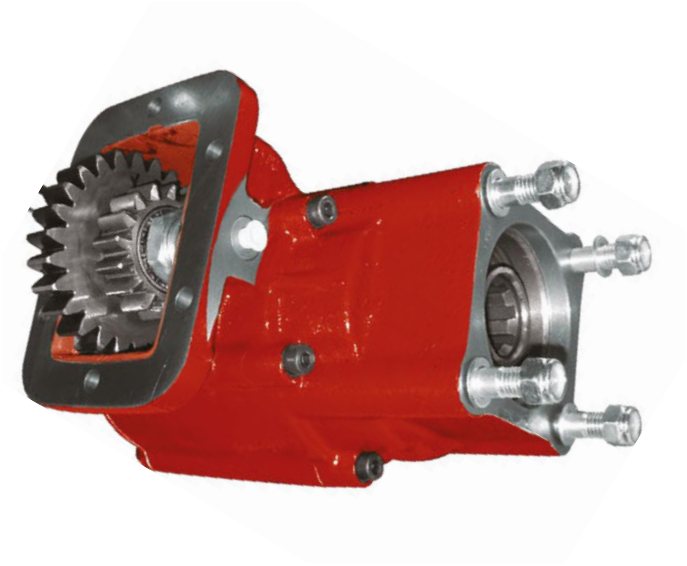






Hot Shift PTO, 6 Bolt, Universal

Side Mount, Pneumatic
Lateral, Neumático



Description Descripción

Hot shift 6 bolt 2 gears pto Pneumatic Mounting on both sides of the Transmission. Several internal ratios. Both possibilities of assembly 1 and 3 in the same housing. All input gears from 1000 / 2000 pto fit on this series.

Toma de fuerza de 6 taladros, 2 piñones con embrague incorporado. Accionamiento neumatico. Montaje sobre ambos lados de la caja de cambios. Diferentes relaciones de transmisión. Mismos engranajes de ataque que la serie 1000/2000 cubriendo la mayoria de cajas de cambio del mercado.

Main Data Datos Principales	
Mounting position Lado de montaje	Right, Left Derecho, Izquierdo
Pump rotation Sentido de giro de la bomba	Right Derecho
Weight Peso (Lb)	44
Engine to PTO ratio Relación motor - Toma de Fuerza	See application book Consultar libro de aplicaciones

Torque working, with an engage pressure of 116 PSI or higher
Par nominal trabjando con presión de accionamiento de 8 bar

INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
40% (Z)	250	25	49	178	18	35
50% (A)	250	25	49	178	18	35
55% (B)	250	25	49	178	18	35
73% (C)	250	25	49	178	18	35
86% (E)	225	22	44	160	16	31
95% (J)	225	22	44	160	16	31
125% (O)	200	22	39	142	14	28

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

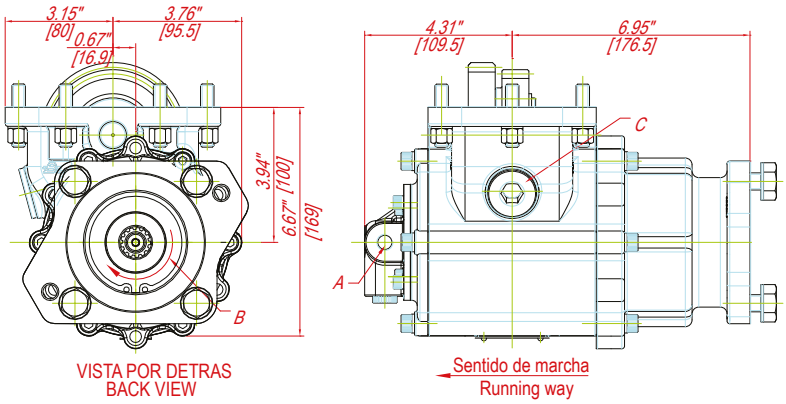
bezaresusa

Hot Shift PTO, 6 Bolt, Universal


Side Mount, Pneumatic
Lateral, Neumático

Most standard output types Tipos de salida más utilizadas


SAE "B" 2/4 bolt SAE "B" 2/4 taladros



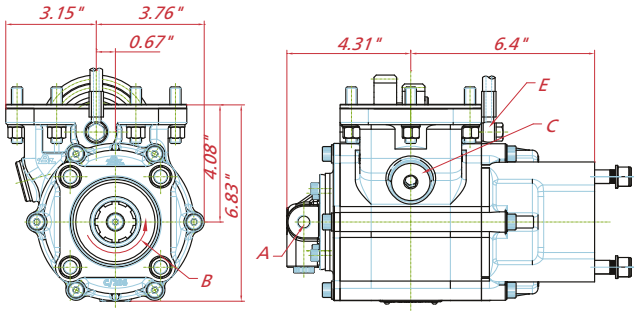
Position 1 Position 1



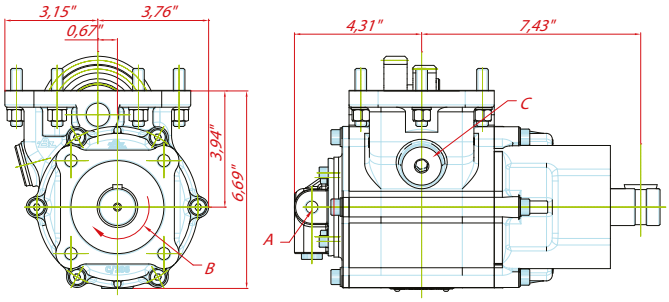
Position 3 Position 3



ISO 4 bolt ISO 4 taladros



Round shaft Eje chaveteado



Notas		Notes	
A	Air connection BSP 1/4"	A	Entrada de aire 1/4" BSP
B	Rotation	B	Sentido de giro
C	Backlash check plug	C	Comprobación de juego de engranajes
D	Pressure switch	D	Presostato

Hot Shift PTO, 6 Bolt, Universal

Side Mount, Pneumatic
Lateral, Neumático

Part Number Breakdown Codificación PTO

3200 X A N 01 1 SA

SERIES:

3200 6 bolt clutch PTO

VERSIONS:

X Standard
P Pressure lube idler

INTERNAL RATIOS:

(A) 1:0.50
(B) 1:0.55
(C) 1:0.73
(E) 1:0.80
(J) 1:0.95
(O) 1:1.25
(R) 1:1.37
(S) 1:1.50
(T) 1:1.65
(Z) 1:0.40

SHIFTER TYPE:

A Air with 101 air kit
N Air without 101 air kit
S Air with 126 air kit
T Air with 127 air kit
U Air kit with 128 air kit
P Electric over air, 12V

INPUT GEAR:


01 Fuller series (R/675)
02 Universal (R/683))
03 Spicer (R/736)
05 Spicer (R/677)
06 Fuller (TREMEC) (R/679)
07 Navistar (R/693)
08 Spicer (R/682)
09 Spicer (R/684)
10 Chevy (R/678)
11 Chevy / Spicer (R/699)
13 New Process (R/718)
14 Fuller (R/737)
15 Eaton / Fuller FS-4005C/4205C (R/717)
16 ZF (R/716)
17 Eaton 6305 A (R/680)
18 Eaton FS 3005 / 4005 AB (R/717)
20 Dodge (R/701)
21 ZF S5-42/5.72 (R/676)
22 Eaton / Fuller (R/738)
23 Eaton / Fuller FS-3005 B (R/714)
24 Mack (R/695)
25 Eaton / Fuller FS 7206 A (R/715)
27 Eaton / Fuller (R/692)
28 Fuller (R/771)
30 Eaton / Fuller (R/698)
33 Spicer (R/697)
34 Spicer (R/696)
36 New Process (R/739)
39 Warner (R/741)
41 Warner (R/743)
42 Fuller (R/770)
50 ZF (R/700)
51 Dodge (R/702)
52 Zed / F (R/700)
55 Mack / Renault (R/748)
57 ZF (R/740)
61 Ford (R/754)
66 Fuller (R/862)
68 Tremec (R/897)

OUTPUT TYPE:

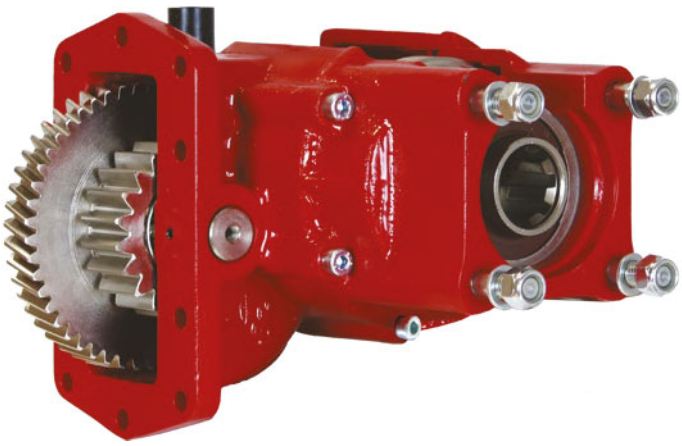
DA ISO 4 bolt
FA Flange SAE 1100
IB Flange SAE 1300
IC Flange DIN 100
SA SAE "B" 2/4 bolt 13T.
SB SAE "BB" 2/4 bolt 15T.
SE SAE type 1 ¼ round shaft
SG SAE type 1 ½ round shaft

MOUNTING POSITION:

1 Right, Forward
3 Left, Forward



Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com



Description Descripción

Hot Shift, 2 gear Power Take-off, with low profile. Hydraulic shifting and internal lubrication. Mounting on both sides of Transmission. Wide range of internal ratios and most output options: SAE B, SAE BB or ISO 4 bolts.

Toma de fuerza de 2 piñones, con embrague incorporado, accionamiento hidráulico y lubricación interna. Montaje sobre ambos lados de la caja de cambios. Amplia gama de relaciones internas. Disponible con los tipos mas usuales de salida: SAE B, SAE BB o ISO 4 taladros.

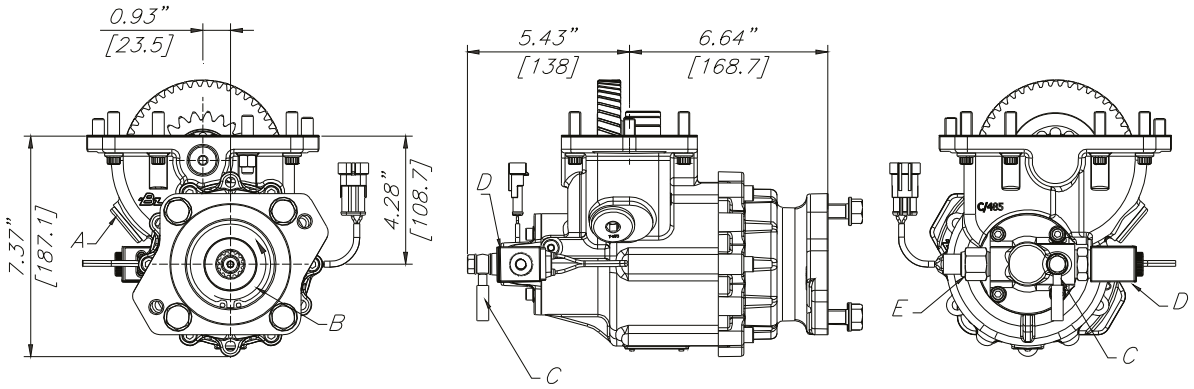
Main Data Datos Principales	
Mounting position Lado de montaje	Right, Left Derecho, Izquierdo
Weight Peso (Lb)	53

Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)

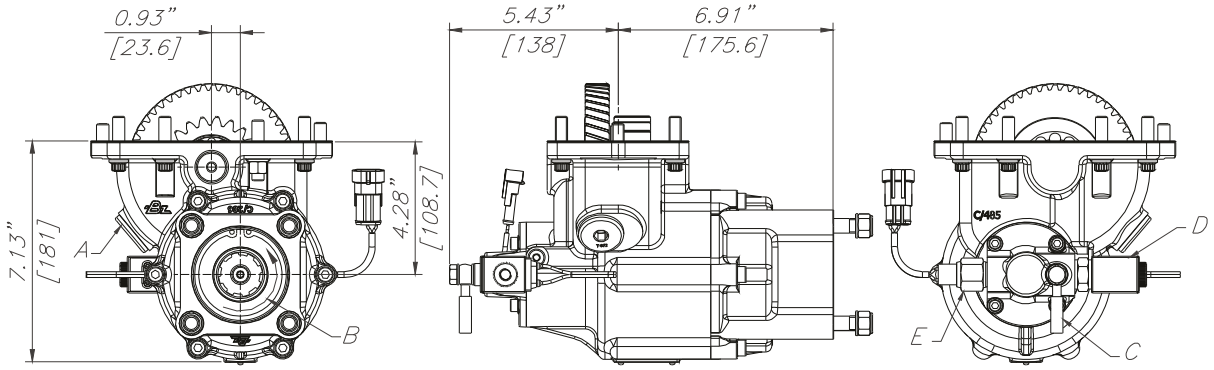
INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
54%(B)	410	39	78	310	30	59
59%(C)	400	38	76	300	29	57
70%(E)	380	36	72	280	27	54
76% (G)	360	34	68	260	25	50
82% (J)	340	33	65	250	24	48
96% (M)	320	31	61	230	22	44
122% (O)	270	26	51	200	19	38

Standard output types Tipos de salida más utilizadas

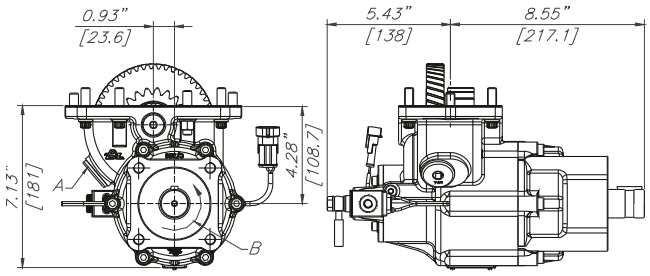
SAE "B"2/4 bolt SAE "B"2/4 taladros



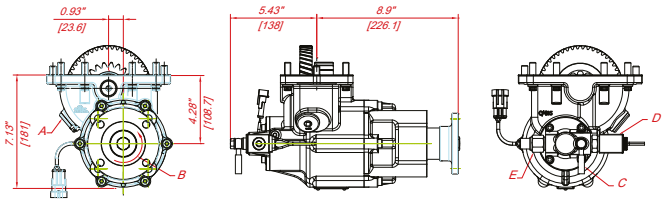
ISO 4 bolt ISO 4 taladros



Round Shaft Eje chaveteado



Drive Flange Plato de Transmisión



	Notas		Notes
A	Backlash check plug	A	Comprobación juego de engranajes
B	Rotation	B	Sentido de giro
C	Shifting hose	C	Latiguillo de accionamiento
D	Solenoid 14V DC (24V DC Optional)	D	Solenoide 14V DC (24V DC Opcional)
E	Pressure switch	E	Presostato

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Part Number Breakdown Codificación PTO

3252 P B E 63 3 SA

SERIES:

3252 Allison 10 bolts

VERSIONS:

P Pressure lube idler

INTERNAL RATIOS:

54% (B)
59% (C)
70% (E)
76% (G)
82% (J)
96% (M)
122% (O)

SHIFTER TYPE:

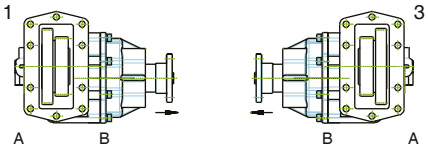
E Electric 14V. over hydraulic
F Electric 24V. over hydraulic
T Electric 14V. over hydraulic, without wiring kit
V Electric 24V. over hydraulic, without wiring kit

OUTPUT TYPE:

DA ISO 4 bolt
IB Flange SAE 1310
IC Flange SAE 1410
SA SAE "B" 2/4 bolt 13T
SB SAE "BB" 2/4 bolt 15T
SE SAE 1¼" round shaft

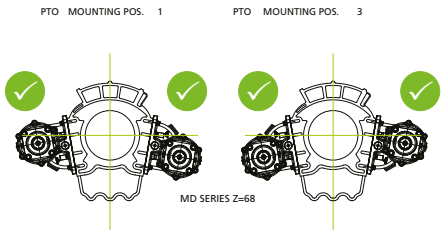
ASSEMBLY ARRANGEMENTS:

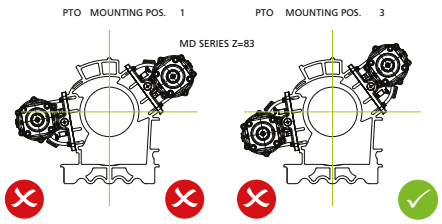
1 Right, Forward
3 Left, Forward

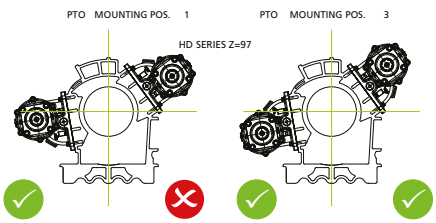


INPUT GEAR:

63 Allison

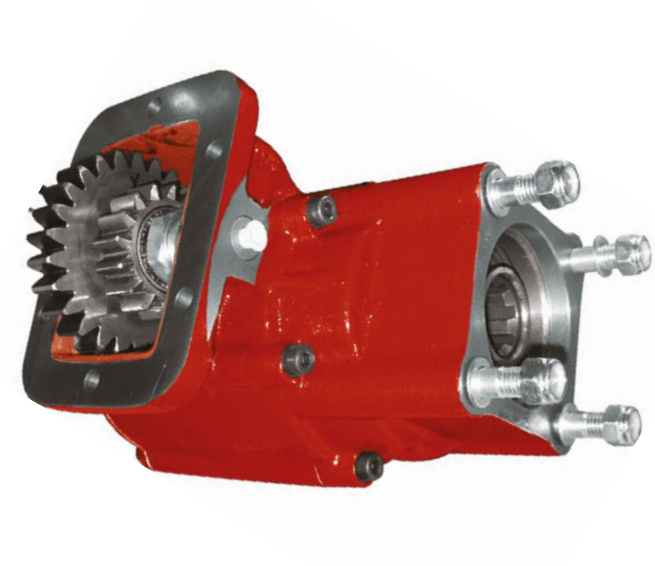






Hot Shift PTO, 6 Bolt, Universal
Allison, Aisin

Side Mount, Hydraulic
Lateral, Hidráulico



Description Descripción

Hot shift 6 bolt 2 gears pto. Only hydraulic shifting Mounting on both sides of the Transmission. Several internal ratios and output types. Both possibilities of assembly (1 and 3) in one housing. With 3300 Series is possible to work with shaft-top or shaft-bottom in both sides right or left.

Toma de fuerza de 6 taladros, 2 piñones con embrague incorporado. Solo accionamiento hidráulico. Montaje sobre ambos lados de la caja de cambios (posiciones 1 y 3) con una unica carcasa. Diferentes relaciones de transmisión y tipos de salida. Con la serie 3300 es posible montar el eje de salida hacia arriba o hacia abajo.

Main Data Datos Principales	
Mounting position Lado de montaje	Right, Left Derecho, Izquierdo
Pump rotation Sentido de giro de la bomba	Right Derecho
Weight Peso (Lb)	48
Engine to PTO ratio Relación motor - Toma de Fuerza	See application book Consultar libro de aplicaciones

Torque working, with an engage pressure of 116 PSI or higher
Par nominal trabjando con presión de accionamiento de 8 bar

INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
40% (Z)	250	25	49	178	18	35
50% (A)	250	25	49	178	18	35
55% (B)	250	25	49	178	18	35
73% (C)*	250	25	49	178	18	35

*C ratio: 73% - Aisin, 58% - Allison

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

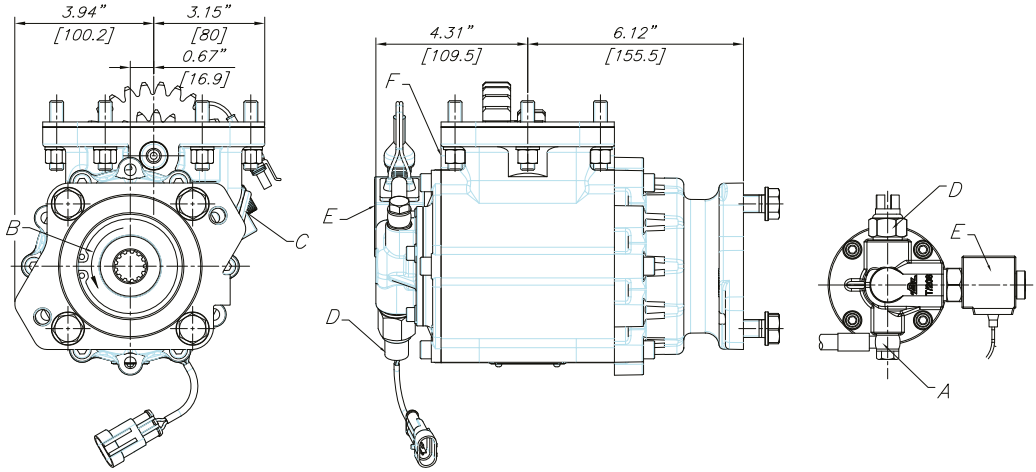
bezaresusa

Hot Shift PTO, 6 Bolt, Universal
Allison, Aisin

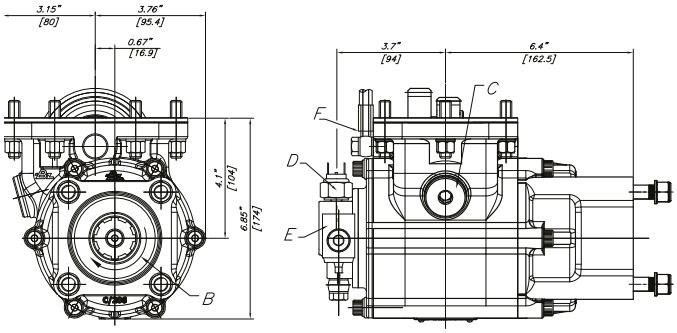
Side Mount, Hydraulic
Lateral, Hidráulico

Most standard output types Tipos de salida más utilizadas

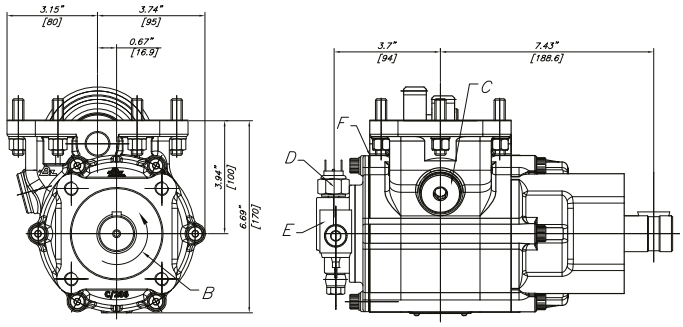
SAE "B" 2/4 bolt SAE "B" 2/4 taladros



ISO 4 bolt ISO 4 taladros



Round shaft Eje chaveteado



	Notas		Notes
A	Shifting hose	A	Latiguillo de accionamiento
B	Rotation	B	Sentido de giro
C	Backlash check plug	C	Comprobación de juego de engranajes
D	Pressure switch	D	Presostato
E	Solenoid standard 14V (24V optional)	E	Solenoide estándar 14V (24V opcional)
F	Lubrication hose	F	Latiguillo de lubricación

Hot Shift PTO, 6 Bolt, Universal
Allison, Aisin

Side Mount, Hydraulic
Lateral, Hidráulico

Part Number Breakdown Codificación PTO

3300 P A E 64 1 SA

SERIES:

3300 6 bolt clutch PTO

VERSIONS:

P Greasable Idler shaft
H Special Lube Kit (Hino)

INTERNAL RATIOS:

(A) 1:0.50
(B) 1:0.55
(Z) 1:0.40
(...)

SHIFTER TYPE:

E Electric 14V. over hydraulic
F Electric 24V. over hydraulic
T Electric 14V. over hydraulic, without wiring kit
V Electric 24V. over hydraulic, without wiring kit

INPUT GEAR:


64 Allison
67 Aisin

OUTPUT TYPE:

DA ISO 4 bolt
IB Flange SAE 1300
IC Flange SAE 1400
ID Flange DIN 100
SF SAE "Aww" 2 bolt 9T
SA SAE "B" 2/4 bolt 13T.
SB SAE "BB" 2/4 bolt 15T.
SE SAE type 1 ¼ round shaft

MOUNTING POSITION:

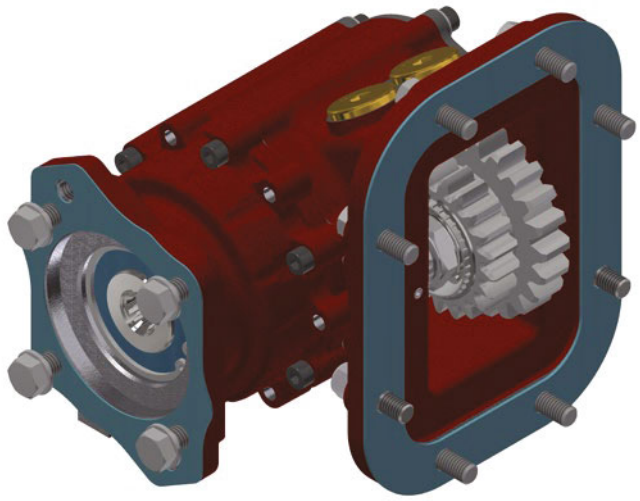
1 Right, Forward
3 Left, Forward



Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Hot Shift PTO, 8 Bolt, Universal

Bottom, Pneumatic
Inferior, Neumático



Description Descripción

Hot shift 8 bolt 2 gears Pneumatic, bottom PTO. Several internal ratios. Both possibilities of assembly 1 and 3 in the same housing. All input gears from 1000 / 2000 pto fit on this series.

Toma de fuerza de 8 taladros, 2 piñones con embrague incorporado. Accionamiento neumatico Diferentes relaciones de transmisión. Mismos engranajes de ataque que la serie 1000/2000 cubriendo la mayoria de cajas de cambio del mercado.

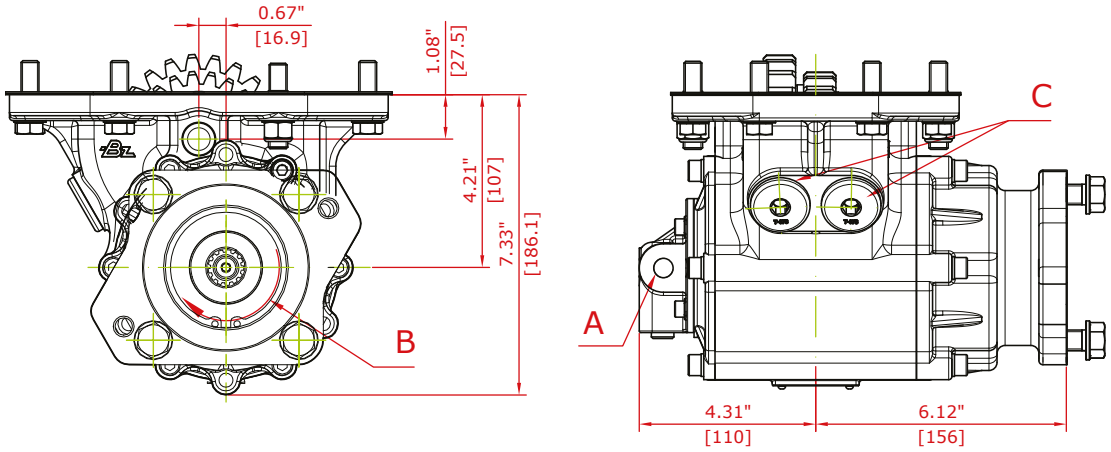
Main Data Datos Principales	
Mounting position Lado de montaje	Bottom, Right, Left Inferior, Derecho, Izquierdo
Pump Rotation Sentido de giro de la bomba	Left Izquierdo
Weight Peso (Lb)	60
Engine to PTO ratio Relación motor - Toma de Fuerza	See application book Consultar libro de aplicaciones

Torque working, with an engage pressure of 116 PSI or higher
Par nominal trabjando con presión de accionamiento de 8 bar

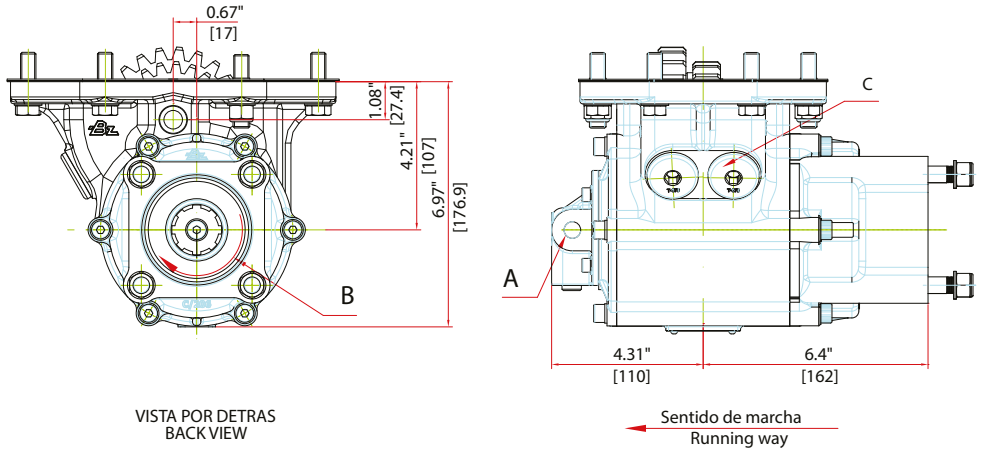
INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
40% (Z)	250	25	49	178	18	35
50% (A)	250	25	49	178	18	35
55% (B)	250	25	49	178	18	35
73% (C)	250	25	49	178	18	35
86% (E)	225	22	44	160	16	31
95% (J)	225	22	44	160	16	31
125% (O)	200	22	39	142	14	28

Bottom, Pneumatic
Inferior, Neumático

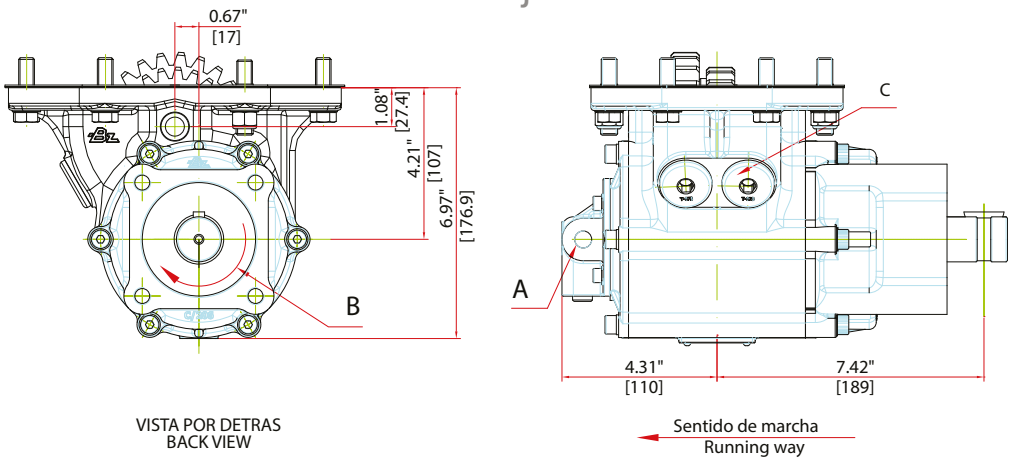
SAE "B" 2/4 bolt SAE "B" 2/4 taladros



ISO 4 bolt ISO 4 taladros



Round Shaft Eje chaveteado



	Notas		Notes
A	Air connection BSP 1/4"	A	Entrada de aire 1/4" BSP
B	Rotation	B	Sentido de giro
C	Backlash check plug	C	Comprobación de juego de engranajes

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Hot Shift PTO, 8 Bolt, Universal

Bottom, Pneumatic
Inferior, Neumático

Part Number Breakdown Codificación PTO

3800 X A N 01 1 SA

SERIES:

3800 8 bolt clutch PTO
3810 8 bolt clutch PTO deep mount

VERSIONS:

X Standard

INTERNAL RATIOS:

(A) 1:0.50
(B) 1:0.55
(C) 1:0.73
(E) 1:0.86
(J) 1:0.95
(O) 1:1.25
(R) 1:1.37
(S) 1:1.50
(T) 1:1.65
(Z) 1:0.40

SHIFTER TYPE:

A Air with 101 air kit
N Air without 101 air kit

INPUT GEAR: (Z = 35)


01 Fuller series (R/675)
02 Universal (R/683)
03 Spicer (R/736)
05 Spicer (R/677)
06 Fuller (TREMEC) (R/679)
07 Navistar (R/693)
08 Spicer (R/682)
09 Spicer (R/684)
10 Chevy (R/678)
11 Chevy / Spicer (R/699)
13 New Process (R/718)
14 Fuller (R/737)
15 Eaton / Fuller FS-4005C/4205C (R/717)
16 ZF (R/716)
17 Eaton 6305 A (R/680)
18 Eaton FS 3005 / 4005 AB (R/717)
20 Dodge (R/701)
21 ZF S5-42/5.72 (R/676)
22 Eaton / Fuller (R/738)
23 Eaton / Fuller FS-3005 B (R/714)
24 Mack (R/695)
25 Eaton / Fuller FS 7206 A (R/715)
27 Eaton / Fuller (R/692)
28 Fuller (R/771)
30 Eaton / Fuller (R/698)
33 Spicer (R/697)
34 Spicer (R/696)
36 New Process (R/739)
39 Warner (R/741)
41 Warner (R/743)
42 Fuller (R/770)
50 ZF (R/700)
51 Dodge (R/702)
52 Zed / F (R/700)
55 Mack / Renault (R/748)
57 ZF (R/740)
61 Ford (R/754)
64 Allison (R/752)
66 Fuller (R/862)
67 Aisin (R/870)
68 Tremec (R/897)
75 Endurant (G/210)

OUTPUT TYPE:

DA ISO 4 bolt
IB Flange SAE 1300
IC Flange SAE 1400
ID Flange DIN 100
SA SAE "B" 2/4 bolt 13T
SB SAE "BB" 2/4 bolt 15T
SE SAE type 1 ¼ round shaft
SF SAE "A" 2 bolt rotatable

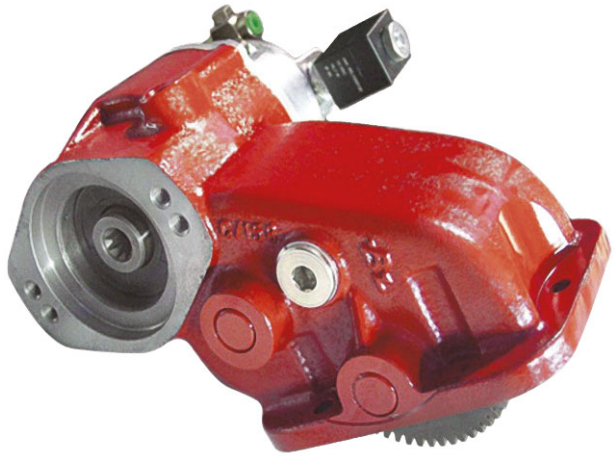
MOUNTING POSITION:

1 Right, Forward
3 Left, Forward



Ford 5R 110W

Side Mount, Hydraulic
Lateral, Hidráulico



Description Descripción

Hot Shift PTO used in the Ford F-Series. 9 teeth, 11 Teeth & Round Shaft are available. Two positions for a SAE "A" gear pump allow for different installation options.

Toma de fuerza con embrague incorporado utilizada en la serie F de Ford. Varios tipos de ejes de salida disponibles: Z-9, Z-11, y eje chaveteado. Dos posiciones para una bomba de engranajes SAE "A" permiten opciones de instalación diferente.

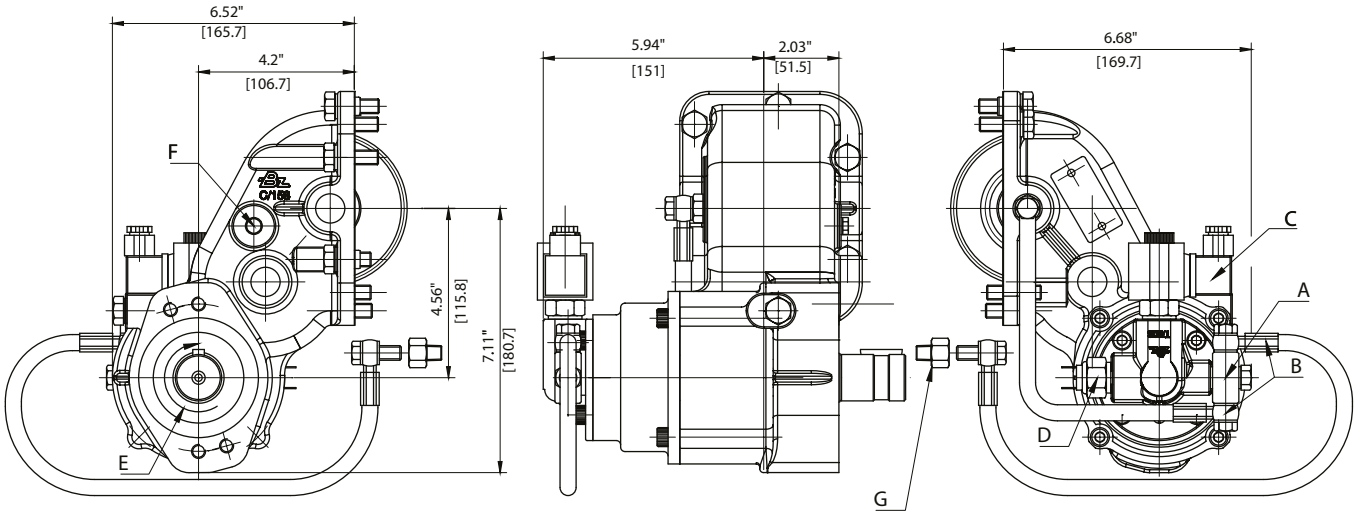
Main Data Datos Principales		
Torque (LB. FT.) Par nominal	Continuous Continuo	86
	Intermittent Intermitente	120
Power Potencia (HP) @ 1000 rpm	16	
Mounting position Lado de montaje	Left Izquierdo	
Pump rotation Sentido de giro de la bomba	Left Izquierdo	
Weight Peso (Lb)	35	
Engine to PTO ratio Relación motor - Toma de fuerza	148%	

Codes and combinations Códigos y combinaciones		
Output types Tipos de salida	SAE A (9 teeth)	SAE 1¼" round shaft
	3900PEE654SF	3900PEE654SE

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Ford 5R 110W

Side Mount, Hydraulic
Lateral, Hidráulico



	Notas		Notes
A	"T" connection, for lubrication pipe	A	Conexión en "T" para latiguillo de lubricación
B	Lubrication and engagement pipe	B	Latiguillo de lubricación y accionamiento
C	Solenoid 12V	C	Solenoide 12V
D	Pressure switch	D	Presostato
E	Rotation	E	Sentido de giro
F	Backlash check plug	F	Tapón de comprobación de juego de engranajes
G	Adapter connector (Female BSP 1/8" - Male NPT 1/8")	G	Racor adaptador (Hembra BSP 1/8" - Macho NPT 1/8")

Ford 6R140 (MY 2011 SUPER DUTY)

Side Mount, Hydraulic
Lateral, Hidráulico



Description Descripción

Hot shift PTO used in the 6-speed pick up vehicles, SAE A (9 teeth, 11 teeth and 13 teeth) & 1 1/4" round shaft are available. Two mounting positions for SAE A gear pumps & 60 x 60 flange gear pumps mounting.

Toma de fuerza con embrague incorporado utilizada en los vehiculos pick up de 6 velocidades. Disponible en salida SAE A (Z=9, Z=11 y Z=13) y eje chaveteado 1 1/4". Dos posiciones de montaje para bombas SAE A ademas permite el montaje de bombas con brida 60 x 60.

Main Data Datos Principales		
Torque (LB. FT.) Par nominal	Continuous Continuo	140
	Intermittent Intermitente	200
Power Potencia (HP) @ 1000 rpm		27
Mounting position Lado de montaje		Left Izquierdo
Pump rotation Sentido de giro de la bomba		Left Izquierdo
Weight Peso (Lb)		36
Engine to PTO ratio Relación motor - Toma de fuerza		125%

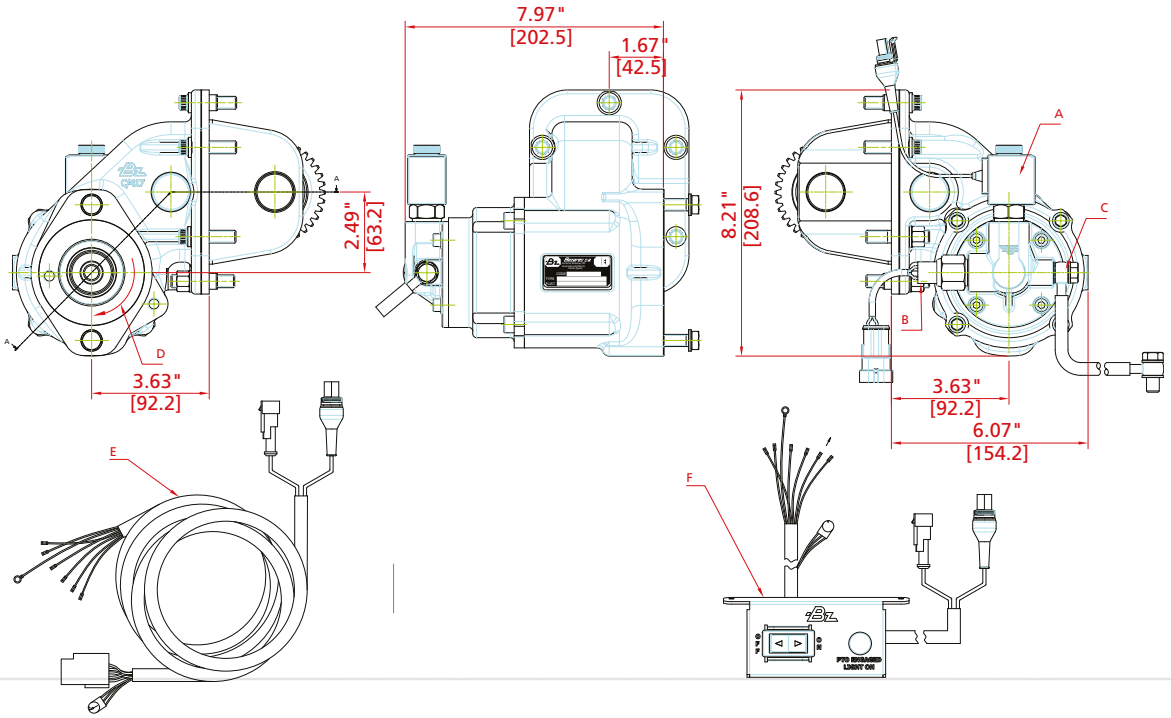
Codes and combinations Códigos y combinaciones				
Output types Tipos de salida	SAE A (9 teeth)	SAE 1¼" round shaft	SAE A (11 teeth)	SAE A (13 teeth)
Part Number Codigo	3920PEE713SF	3920PEE713SE	3920PEE713SH	3920PEE713SI

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

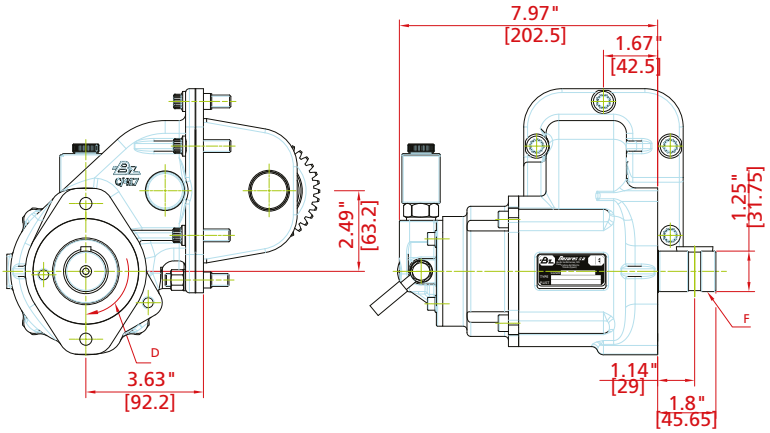
Ford 6R140 (MY 2011 SUPER DUTY)

Side Mount, Hydraulic
Lateral, Hidráulico

SAE A



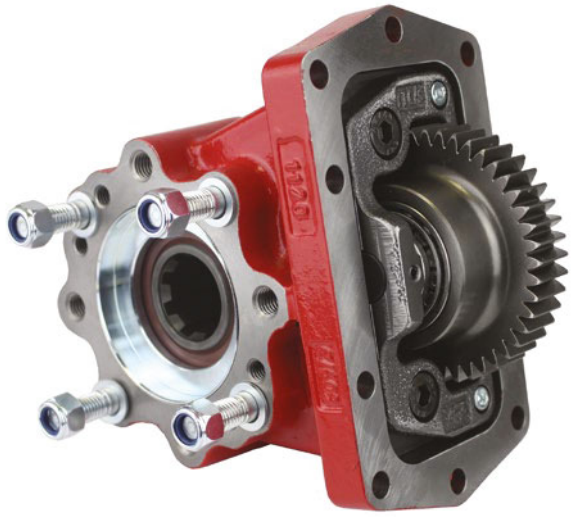
DRIVE SHAFT



	Notas		Notes
A	Solenoid 12V.	A	Solenoide 12V.
B	Pressure switch	B	Presostato
C	Shifting hose	C	Latiguillo de accionamiento
D	Rotation	D	Sentido de giro
E	Standard wire harness P/N. 9097599	E	Kit de accionamiento estándar (9097599)
F	Optional wire harness P/N. 9060599	E	Kit de accionamiento opcional (9060599)

Ford TorqShift 10 speed - 10R-140

Side Mount, Hydraulic
Lateral, Hidráulico



Description Descripción

The PTO 3940 Series PTO is a unique hot shift unit that offers a DIN 5462 output shaft option as standard. It has a robust low profile housing that allows for ease of installation and rotation of pumps for clearance benefits. The special 3940 design also allows for a variety of other pump and driveline output adapter options.

La serie 3940 es una Toma de Fuerza única para estos vehiculos, que ofrece de serie una salida con norma DIN 5462. Su robusta carcasa de perfil rebajado permite una mayor facilidad de instalación, evitando interferencias con otras partes del vehiculo. El diseño especial de 3940 permite adaptarla a otros tipos de salida.

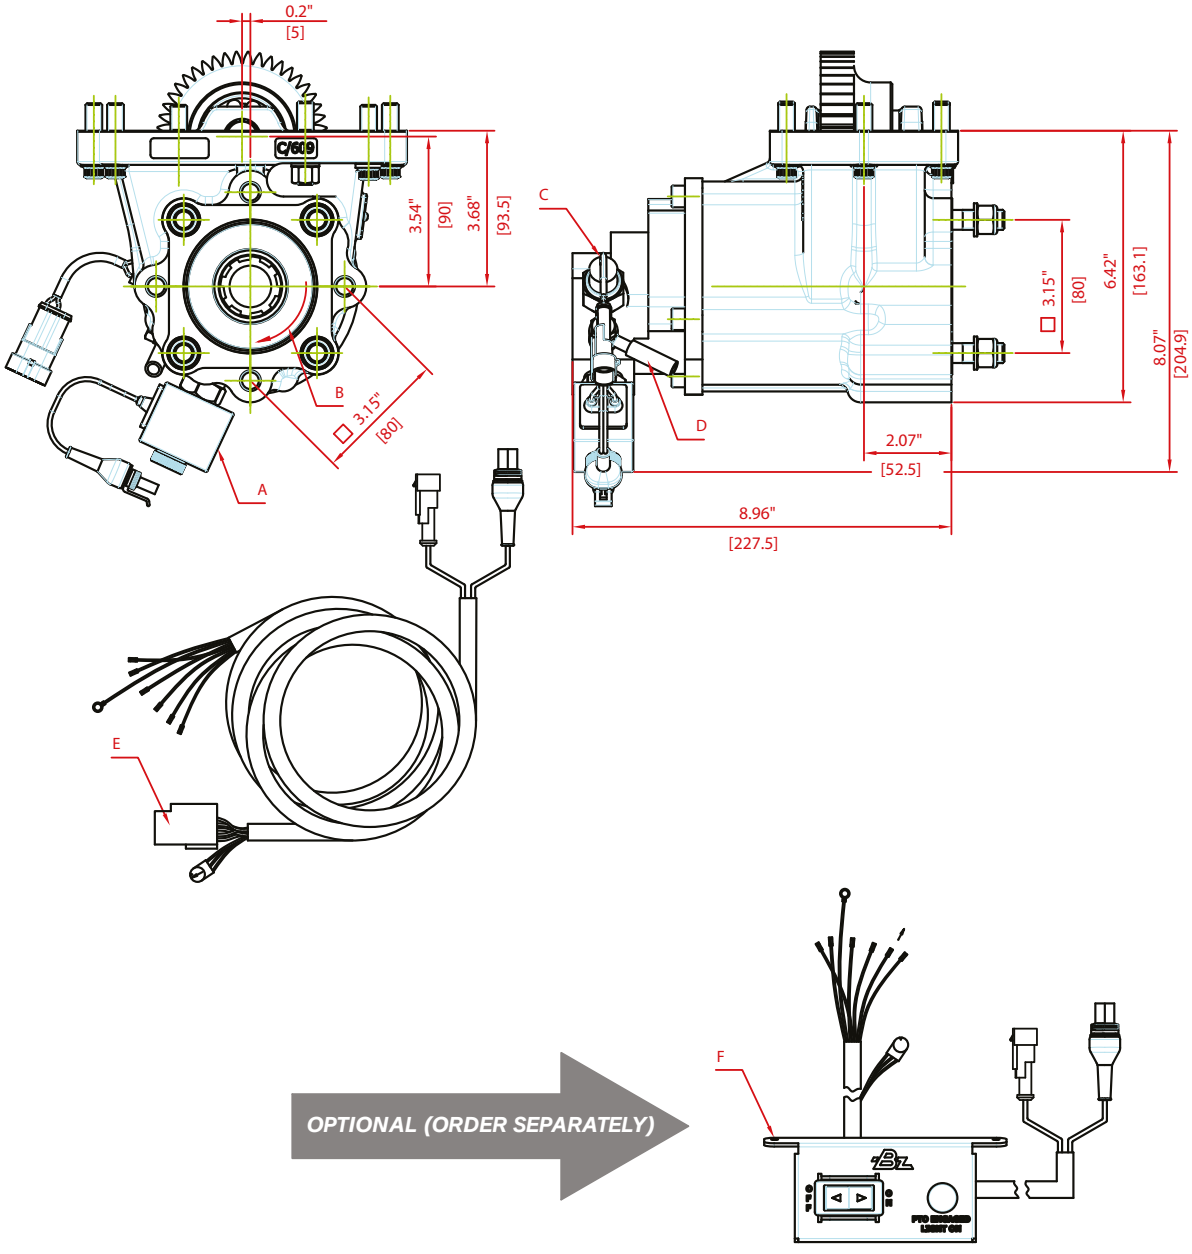
Main Data Datos Principales	
Max. Torque (LB. FT.) Par máximo	230
Power Potencia (HP) @ 1000 rpm	44
Mounting position Lado de montaje	Left Izquierdo
Pump rotation Sentido de giro de la bomba	CCW Izquierdo
Weight Peso (Lb)	36
Engine to PTO ratio Relación motor - Toma de fuerza	130%

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Ford TorqShift 10 speed - 10R-140

Side Mount, Hydraulic
Lateral, Hidráulico

DIN5462 ISO 4 Bolts - 2 Positions



	Notas		Notes
A	Solenoid 14V.	A	Solenoide 14V.
B	Rotation	B	Sentido de giro
C	Pressure switch	C	Presostato
D	Shifting hose	D	Latiguillo de accionamiento
E	Standard wire harness P/N. 9097599	E	Kit de accionamiento estándar (9097599)
F	Optional wire harness P/N. 9094999	F	Kit accionamiento opcional (9094999)

Ford TorqShift 10 speed - 10R-140

Side Mount, Hydraulic
Lateral, Hidráulico

Part Number Breakdown Codificación PTO

3940 P O E 78 3 DA

SERIES:

3940

VERSIONS:

P Pressure Lube

RATIO:

(O) 1:1.15

SHIFTING TYPE:

E- 14V. Electric over Hydraulic (**)
*****.- Standard wire harness without rocker switch.***
Optional wire harness with rocker switch P/N. 9094999 sold separately

OUTPUT TYPE:

DA - DIN 5462 ISO 4 bolt (*)
****.- Output a dapter Kits sold separately. See below***

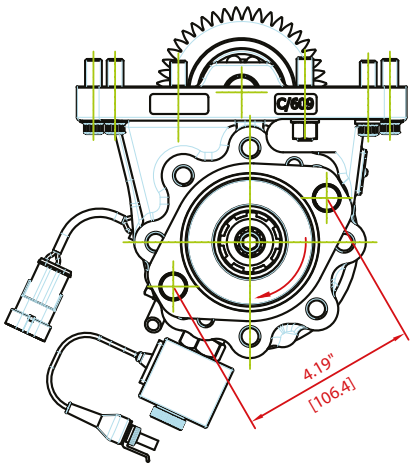
MOUNTING POSITION:

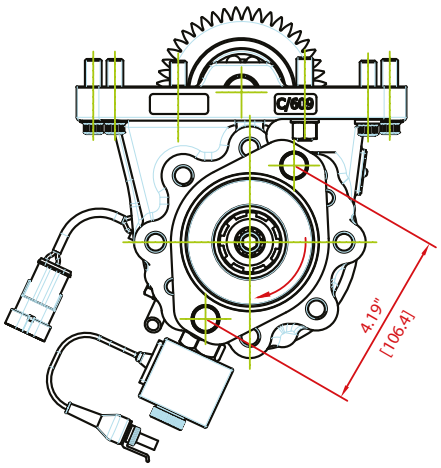
3 - Left, Forward


INPUT GEAR: (Z = 35)

78 - Ford 10R140

SAE A 2 Bolts - 2 Positions







Conversion kits
P/N 806635 - SAE A 3/4" 11T
P/N 806735 - SAE A 5/8" 9T
P/N 806835 - SAE A 7/8" 13T

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 8 Hole, Heavy Duty
PTO SAE8 Taladros Reforzado

Pneumatic
Neumático



Description Descripción

Power Take-off designed for very heavy duty application, low profile two gears, different transmission ratio. Pneumatic shifting. Also available in position 1 and 3.

Toma de fuerza diseñada para aplicaciones de trabajo muy pesado, con varias relaciones de transmisión, accionamiento neumático, disponible en posición 1 y 3.

Main Data Datos Principales	
Mounting position Lado de montaje	Bottom left Izquierdo inferior
Weight Peso (Lb)	44

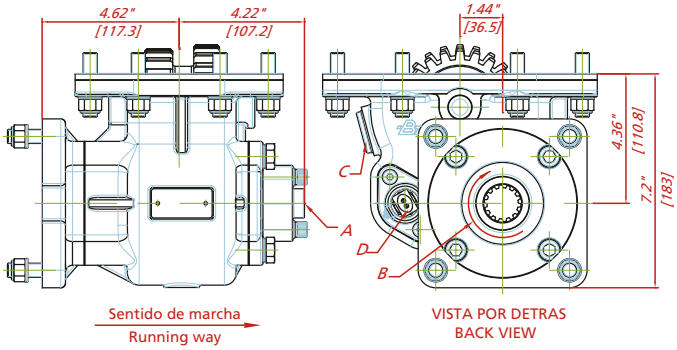
Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)

INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
57%(B)	450	44	87	317	31	62
70%(C)	470	45	90	340	33	65
86%(E)	470	45	90	340	33	65
105%(J)	400	39	77	300	29	58

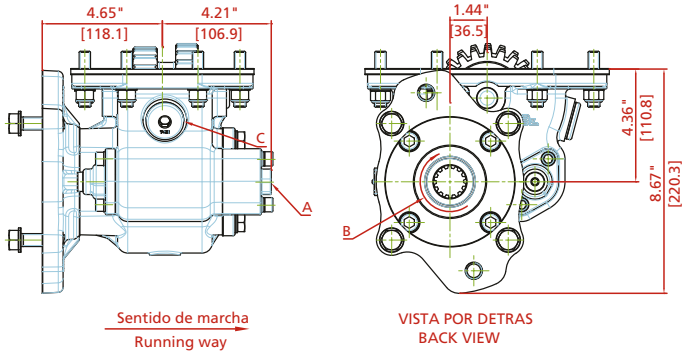
SAE 8 Hole, Heavy Duty
PTO SAE 8 Taladros, Reforzado

Standard output types Tipos de salida más utilizadas

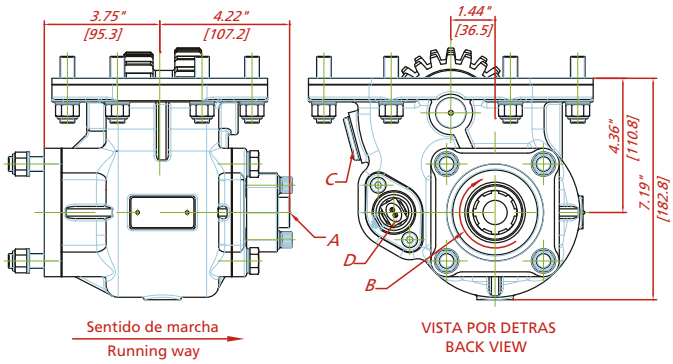
SAE "C" 4 bolts SAE "C" 4 taladros



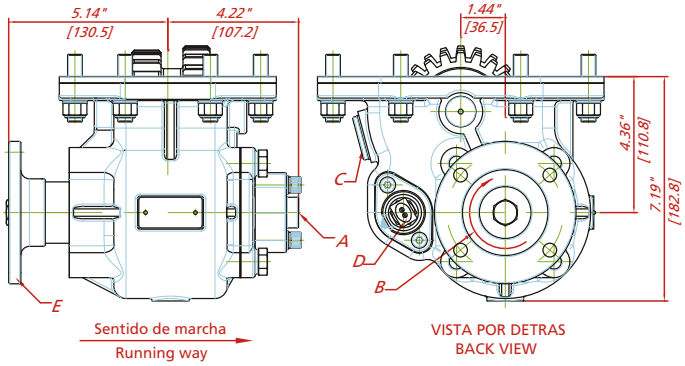
SAE "C" 2/4 bolts SAE "C" 2/4 taladros



ISO 4 bolts ISO 4 taladros



Drive Flange Plato de Transmisión



	Notas		Notes
A	Air connection, thread ¼" BSP	A	Toma de aire, rosca ¼" GAS
B	Rotation	B	Sentido de giro
C	Backlash check plug	C	Tapón comprobación juego de engranajes
D	Indicator switch	D	Indicador de funcionamiento
E	Drive flange	E	Plato de transmisión

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 8 Hole, Heavy Duty
PTO SAE8 Taladros Reforzado

Part Number Breakdown Codificación PTO

4100 X B N 01 1 RJ

SERIES:
4100 Standard mounting, 8 bolt
4110 Deep mounting, 8 bolt


VERSIONS:
X Standard

INTERNAL RATIOS:
57% (B)
70% (C)
86% (E)
105% (J)

SHIFTER TYPE:
A Air with 101 air kit
N Air without 101 air kit

OUTPUT TYPE:
DA ISO 4 bolt
IC Flange SAE 1400
RB SAE B, 2/4 bolt, 15T rotatable
RJ SAE C 4 bolt (14 teeth)
RK SAE C 2/4 bolt
SE SAE type 1¼" round shaft
SG SAE B, 2/4 bolt, 14T.

ASSEMBLY ARRANGEMENTS:
1 Right, Forward
2 Right, Rear
3 Left, Forward
4 Left, Rear



INPUT GEAR:
01 Fuller series
24 Mack
75 Endurant HD
77 Endurant XD, XD Pro

SAE 8 Hole, 2 independent outputs
PTO SAE 8 Taladros, 2 salidas independientes

Pneumatic
Neumático



Description Descripción

PTO with two independent outputs and many output shaft types: SAE B, SAE C, round shaft, etc. Different internal ratios make it useful for many applications.

Toma de fuerza con dos salidas independientes, con posibilidad de salidas para muchos tipos de eje: SAE B, SAE C, eje chaveteado, etc. Diferentes relaciones internas para diferentes tipos de aplicaciones.

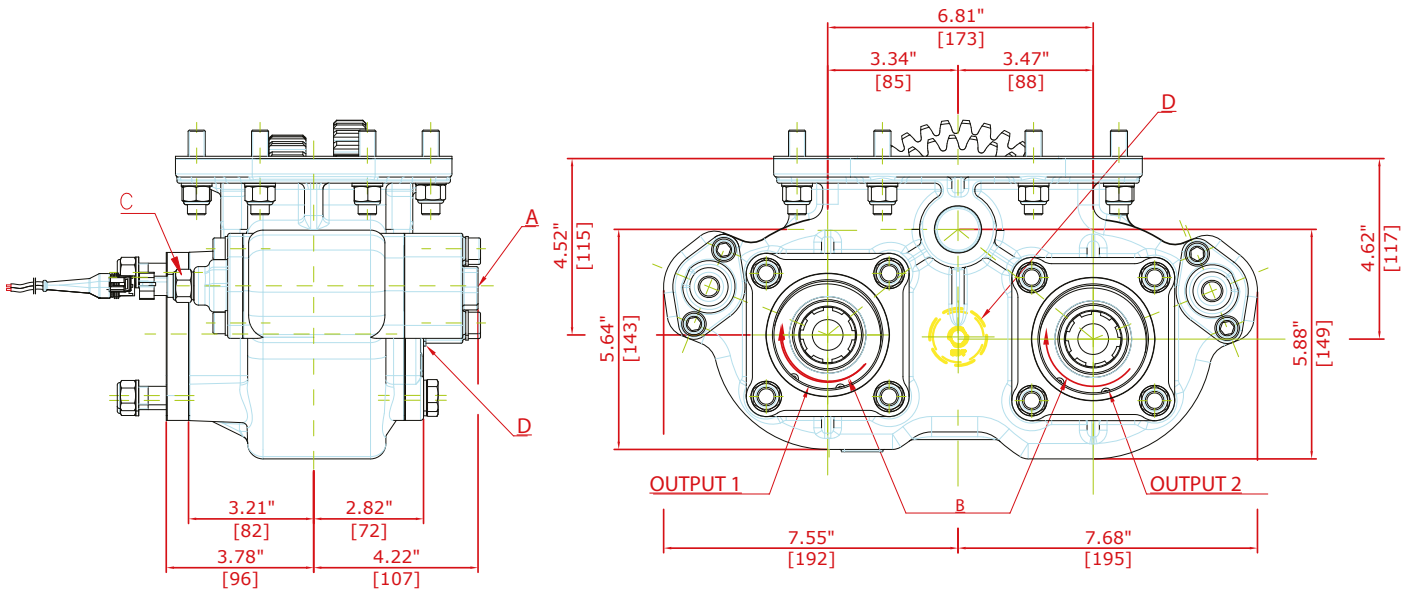
Main Data Datos Principales		
Mounting position Lado de montaje		Bottom Inferior
Weight Peso (Lb)		75
Maximum output torque with the two output working simultaneously Par máximo de salida con las 2 salidas trabajando simultáneamente	Intermittent Intermitente	500 Lb. ft
	Continuous Continuo	400 Lb. ft

	Engine to PTO ratio (See application book) Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)						
OUTPUT	INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
		Torque (Lb. FT)	Power (HP)		Torque (Lb. Ft)	Power (HP)	
			At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
1C	96%	420	40	80	300	29	57
2B	89%	420	40	80	300	29	57
1E	112%	400	38	76.5	285	27	54.5
2C	104%	420	40	80	300	29	57
1J	132%	380	36	73	270	26	52
2E	121%	400	38	76.5	285	27	54.5
1O	168%	350	33	67	250	24	48
2J	152%	380	36	73	270	26	52

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 8 Hole, 2 independent outputs
PTO SAE 8 Taladros, 2 salidas independientes

Pneumatic
Neumático



	Notas		Notes
A	Air connection, thread ¼" BSP	A	Toma de aire, rosca ¼" GAS
B	Rotation	B	Sentido de giro
C	Indicator switch	C	Indicador de funcionamiento
D	Backlash check plug	D	Tapón comprobación juego engranajes

SAE 8 Hole, 2 independent outputs
PTO SAE 8 Taladros, 2 salidas independientes

Pneumatic
Neumático

Part Number Breakdown Codificación PTO

4250 X CB N 01 3 DA DA

SERIES:

4200 Standard mounting

VERSIONS:

X Standard

INTERNAL RATIOS:

(CB)	Output 1: 96%	Output 2: 89%
(EC)	Output 1: 112%	Output 2: 104%
(JE)	Output 1: 132%	Output 2: 121%
(OJ)	Output 1: 168%	Output 2: 152%

SHIFTER TYPE:

A Air with 101 air kit
N Air without 101 air kit


OUTPUT 1
OUTPUT 2

OUTPUT TYPE:

DA ISO 4 bolt
RJ SAE C. 4 bolt (14 teeth)
SE SAE type 1 ¼" round shaft
SG SAE B, 2/4 bolt, 14T.

MOUNTING POSITION:

1 Right, Forward
3 Left, Rear

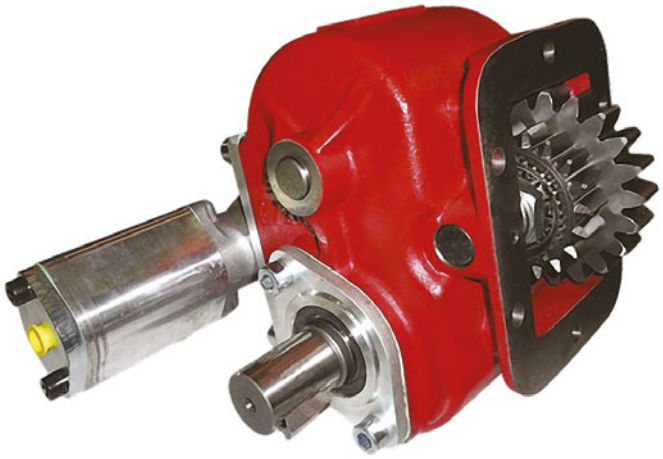


INPUT GEAR:

01 Fuller series

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 6 Holes, forward & reverse output
Type round shaft 1 ¼”
Pneumatic
Neumático



Description Descripción

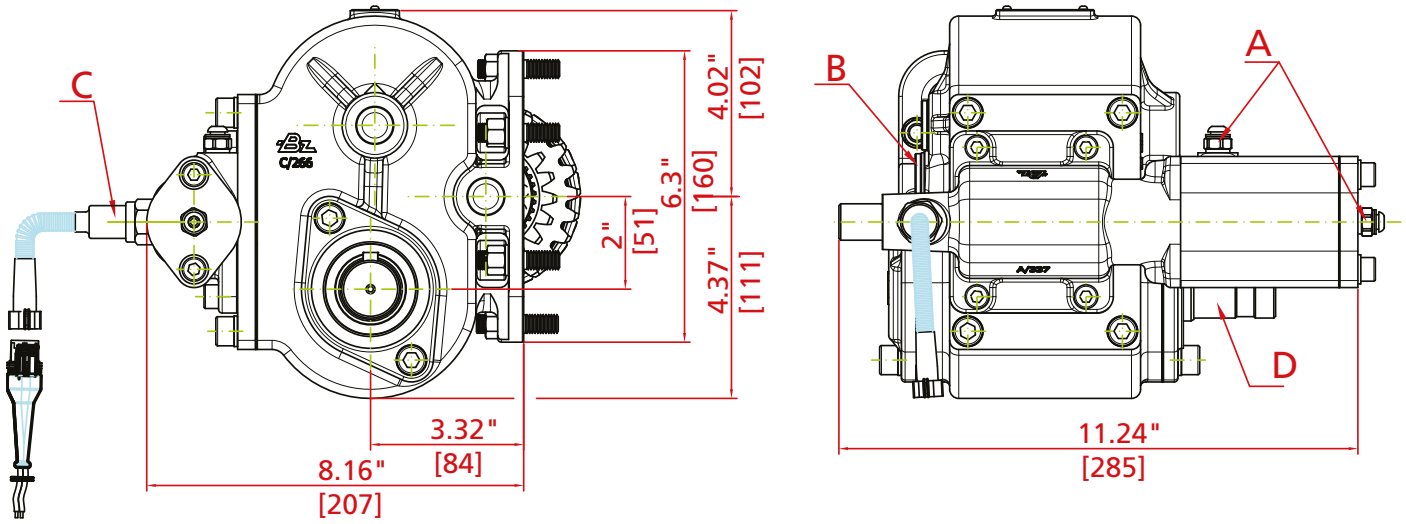
The 6000 Series is a single, low-speed, forward and reverse PTO. Options include air-shift or lever. This series uses the same input gears as the 1000/2000 series PTO’s making it applicable on most manual transmissions.

La Serie 6000 es una toma de fuerza con doble sentido de giro. Las opciones incluyen accionamiento por aire o por palanca. Esta serie utiliza los engranajes de entrada igual que el PTO 1000/2000 serie, por lo que es aplicable en la mayoría de las transmisiones manuales.

Main Data Datos Principales			
Torque (Lb. Ft.) Par nominal		Continuous Continuo	150
		Intermittent Intermitente	210
Power 1000 r.p.m. Potencia a 1000 r.p.m. (HP)			30
Mounting position Lado de montaje			Right, Left Derecho, Izquierdo
Weight Peso (Lb)			37
Internal ratio Relación interna	“C” Ratio	Forward Hacia delante	73%
		Reverse Hacia atrás	83%
Engine to PTO ratio Relación motor - toma de fuerza		See application book Ver libro de aplicaciones	

SAE 6 Holes, forward & reverse output
Type round shaft 1 ¼”

Pneumatic
Neumático



	Notas		Notes
A	Air connection, thread ¼” BSP	A	Toma de aire, rosca ¼” GAS
B	Backlash check plug	B	Tapón comprobación juego de engranes
C	Indicator switch	C	Indicador de funcionamiento
D	Output shaft 1 ¼”	D	Eje de salida 1 ¼”

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 6 Holes, forward & reverse output
Type round shaft 1 ¼”

6000 Series

Pneumatic
Neumático

Part Number Breakdown Codificación PTO

6000 X C N 01 1 SE

SERIES:

6000 SAE 6 holes forward & reverse
6005 SAE 6 holes forward & reverse deep mount
6800 SAE 8 holes forward & reverse

VERSIONS:

X Standard

INTERNAL RATIOS:

(C) FW 73%
RW 83%

SHIFTER TYPE:

A Air with 101 air kit
N Air without 101 air kit

INPUT GEAR:

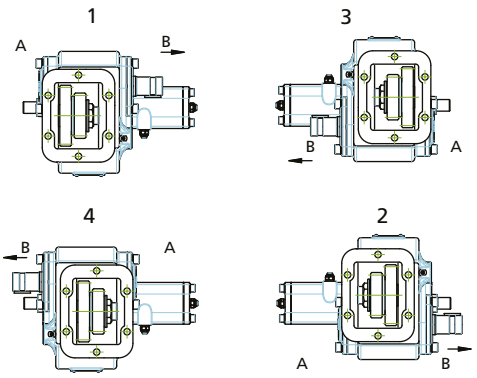
01 Fuller series (R/675)
02 Universal (R/683))
03 Spicer (R/736)
05 Spicer (R/677)
06 Fuller (TREMEC) (R/679)
07 Navistar (R/693)
08 Spicer (R/682)
09 Spicer (R/684)
10 Chevy (R/678)
11 Chevy / Spicer (R/699)
13 New Process (R/718)
14 Fuller (R/737)
15 Eaton / Fuller FS-4005C/4205C (R/717)
16 ZF (R/716)
17 Eaton 6305 A (R/680)
18 Eaton FS 3005 / 4005 AB (R/717)
20 Dodge (R/701)
21 ZF S5-42/5.72 (R/676)
22 Eaton / Fuller (R/738)
23 Eaton / Fuller FS-3005 B (R/714)
24 Mack (R/695)
25 Eaton / Fuller FS 7206 A (R/715)
27 Eaton / Fuller (R/692)
28 Fuller (R/771)
30 Eaton / Fuller (R/698)
33 Spicer (R/697)
34 Spicer (R/696)
36 New Process (R/739)
39 Warner (R/741)
41 Warner (R/743)
42 Fuller (R/770)
50 ZF (R/700)
51 Dodge (R/702)
52 Zed / F (R/700)
55 Mack / Renault (R/748)
56 Tremec (R/744)
57 ZF (R/740)
61 Ford (R/754)
64 Allison (R/752)
66 Fuller (R/862)
67 Aisin (R/870)
68 Tremec (R/897)
70 Mercedes G60 (R/956)

OUTPUT TYPE:

SE SAE type 1 ¼ round shaft

MOUNTING POSITION:

1 Right, Forward
2 Right, Rear
3 Left, Forward
4 Left, Rear



SAE 8 Holes, forward & reverse output
Type round shaft 1 ¼"

Pneumatic
Neumático



Description Descripción

The 6800 Series is a single, low-speed, forward and reverse PTO. It also includes pneumatic shifter Very low speed in both Forward and Reverse.

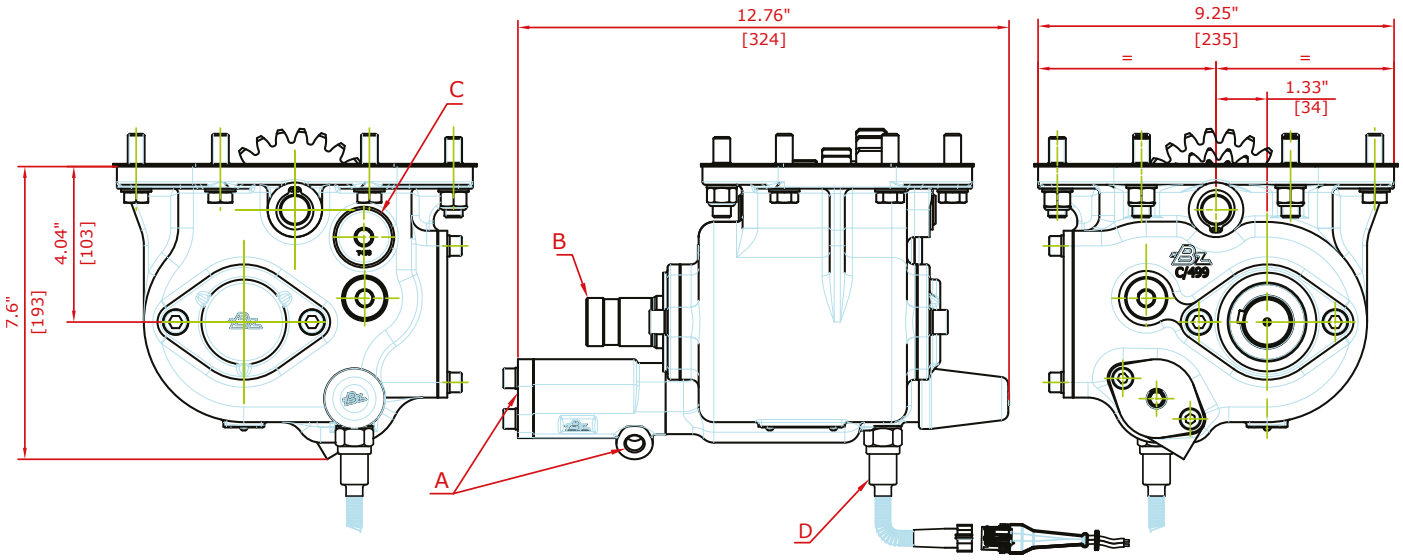
La Serie 6800 es una toma de fuerza con doble sentido de giro. Incluye de serie el accionador neumático. Muy baja relación motor - PTO tanto en giro hacia delante como hacia atrás.

Main Data Datos Principales			
Torque (Lb. Ft.) Par nominal		Continuous Continuo	150
		Intermittent Intermitente	210
Power 1000 r.p.m. Potencia a 1000 r.p.m. (HP)			30
Mounting position Lado de montaje			Bottom, Left Inferior, Izquierdo
Weight Peso (Lb)			40
Internal ratio Relación interna	"B" Ratio	Forward Hacia delante	55%
		Reverse Hacia atrás	52%
Engine to PTO ratio Relación motor - toma de fuerza		See application book Ver libro de aplicaciones	

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 8 Holes, forward & reverse output
Type round shaft 1 ¼”

Pneumatic
Neumático



	Notas		Notes
A	Air connection, thread ¼” BSP	A	Toma de aire, rosca ¼” GAS
B	Output shaft 1 ¼”	B	Eje de salida 1 ¼”
C	Backlash check plug	C	Tapón comprobación juego de engranes
D	Indicator switch	D	Indicador de funcionamiento

SAE 6 Holes, forward & reverse output
Type round shaft 1 ¼"

Pneumatic
Neumático

Part Number Breakdown Codificación PTO

6800 X B N 01 1 SE

SERIES:

6800 SAE 8 holes forward & reverse

VERSIONS:

X Standard

INTERNAL RATIOS:

(B) FW 55%

SHIFTER TYPE:

A Air with 101 air kit
N Air without 101 air kit

INPUT GEAR:


01 Fuller series (R/675)


MOUNTING POSITION:

1 Right, Forward
3 Left, Forward

OUTPUT TYPE:

SE SAE type 1 ¼ round shaft





Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 8 Holes, forward & reverse output
Type round shaft 1 ¼”

8000 Series



Pneumatic
Neumático



Description Descripción

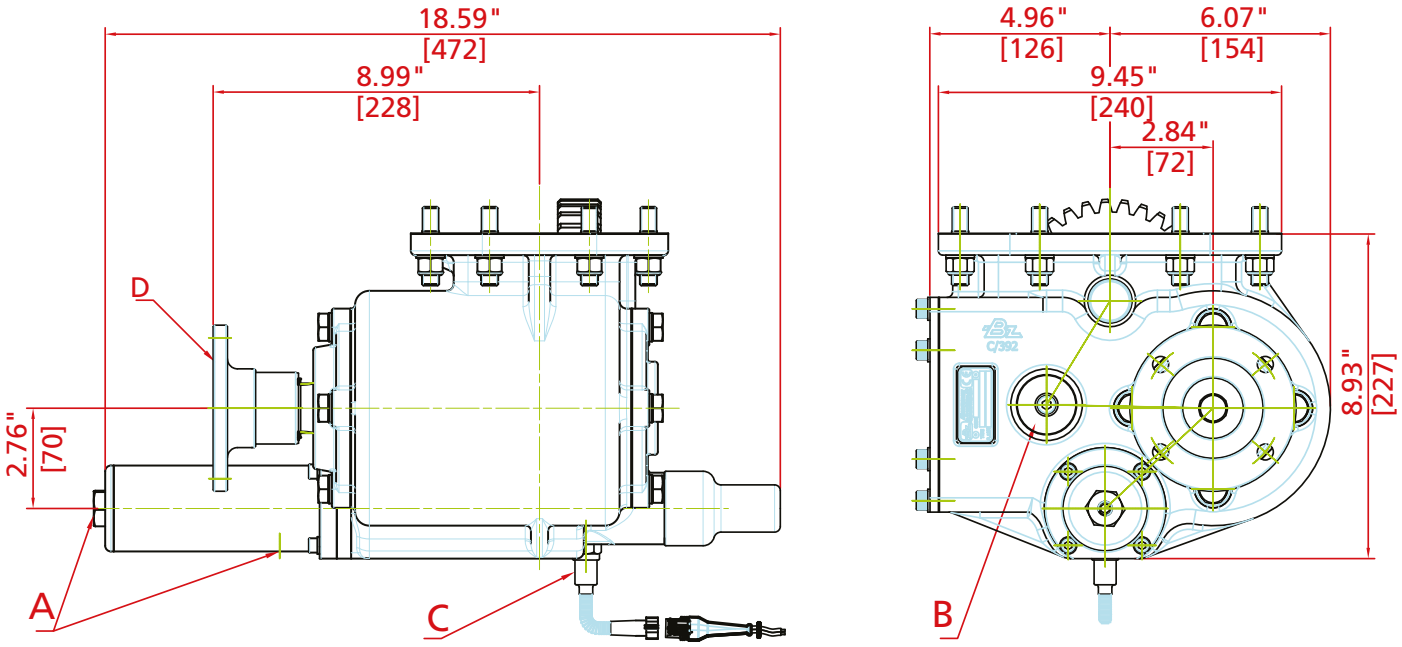
The 8000 series PTO is our 8 bolt forward and reversible PTO which was designed for heavy duty, high torque winch applications. As standard, it comes with our B ratio gear option, and 1400 series companion flange output, and a integrated air shift cover. This was designed to help increase the torque, as well as extending the life of the PTO. It is also the only heavy duty forward and reversible PTO in the market that comes standard with air shift.

Esta Toma de fuerza ha sido diseñada para aplicaciones de trabajo pesado y es muy compacta. Está disponible con relaciones internas estándar y salida de plato. Pistón de accionamiento integrado en el PTO.

Main Data Datos Principales			
Torque (Lb. Ft.) Par nominal		Intermittent Intermitente	500
Power 1000 r.p.m. Potencia a 1000 r.p.m. (HP)			95
Weight Peso (Lb)			88
Assembly arrangements Tipos de montaje		Arrangement 2 	Arrangement 3 
Internal ratio Relación interna	“B” Ratio	Forward Hacia delante	60%
		Reverse Hacia atrás	72%
Engine to PTO ratio Relación motor - toma de fuerza		See application book Ver libro de aplicaciones	

SAE 8 Holes, forward & reverse output
Type round shaft 1 ¼”

Pneumatic
Neumático



	Notas		Notes
A	Air connection, thread 1/8” BSP	A	Toma de aire, rosca 1/8” GAS
B	Backlash check plug	C	Tapón comprobación juego de engranes
C	Indicator switch	D	Indicador de funcionamiento
D	Drive flange (standard 1410)	D	Plato de transmisión (estándar 1410)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 8 Holes, forward & reverse output
Type round shaft 1 ¼”

Pneumatic
Neumático

Part Number Breakdown Codificación PTO

8000 X B N 01 3 DA

SERIES:

8000 8 bolt, forward & reverse PTO

VERSIONS:

X Standard

INTERNAL RATIOS:

(B) Forward 60%
Reverse 72%

SHIFTER TYPE:


A Air with 101 air kit
N Air without 101 air kit

OUTPUT TYPE:

DA ISO 4 bolt
IC Flange SAE 1400
SE SAE type 1 ¼ round shaft
SG SAE type 1 ½ round shaft

MOUNTING POSITION:

2 Right, Rear
3 Left, Rear



INPUT GEAR:

01 Fuller series
02 Universal
24 Mack

SAE 8 Holes, Heavy duty
SAE 8 Taladros, Reforzado

Pneumatic
Neumático



Description Descripción

The 8500 series is our PTO designed for those applications with maximum torque and horsepower requirements. A broad range of ratios and outputs are available. It comes standard with air shift. This PTO also has the same smooth engagement design as our 4100 series which increases the gear life of the PTO.

La serie 8500 es nuestra toma de fuerza diseñada para aquellas aplicaciones con un par máximo y requerimientos de potencia. Una amplia gama de relaciones y salidas están disponibles. La versión estándar lleva accionamiento neumático . Esta toma de fuerza también tiene el mismo diseño de nuestra serie 4100 que aumenta la vida útil del engranaje de la toma de fuerza.

Main Data Datos Principales	
Mounting position Lado de montaje	Bottom left Inferior izquierdo
Weight Peso (Lb)	64

Engine to PTO ratio (See application book)
Relación motor - Toma de Fuerza (Consultar libro de aplicaciones)

INTERNAL RATIO	INTERMITTENT SERVICE			CONTINUOUS SERVICE		
	Torque (Lb. FT)	Power (HP)		Torque (Lb. FT)	Power (HP)	
		At 500 r.p.m.	At. 1000 r.p.m.		At 500 r.p.m.	At. 1000 r.p.m.
61%(B)	500	48	95	400	38	76
72%(C)	500	48	95	400	38	76
85%(E)	480	45	90	370	35	70
108% (J)	450	43	86	340	33	65
127% (O)	400	38	76	300	28	57
138% (R)	360	34	68	270	26	52
150% (S)	320	31	62	240	23	46
163% (T)	280	27	54	210	20	40

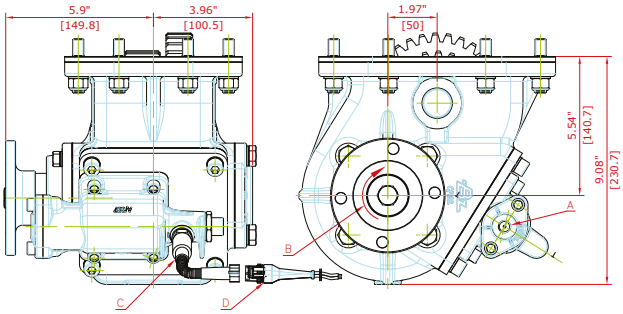
Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SAE 8 Holes, Heavy duty
SAE 8 Taladros, Reforzado

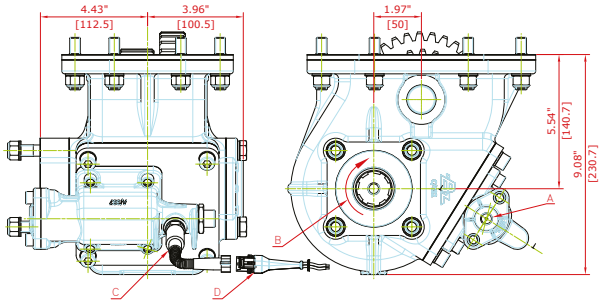
Pneumatic
Neumático

Standard output types Tipos de salida más utilizadas

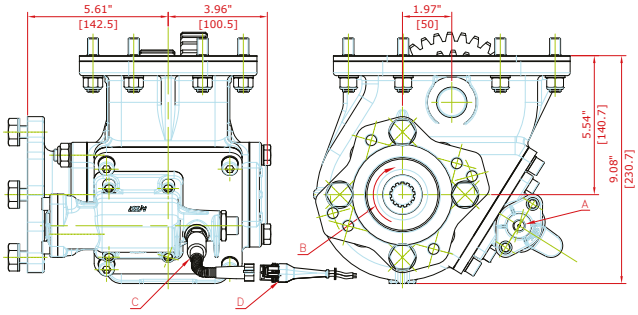
Output flange Salida plato



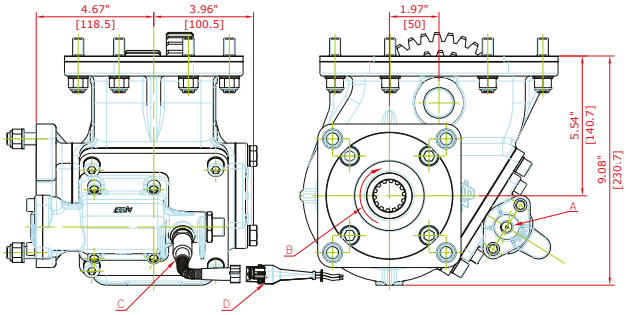
ISO 4 bolt ISO 4 taladros



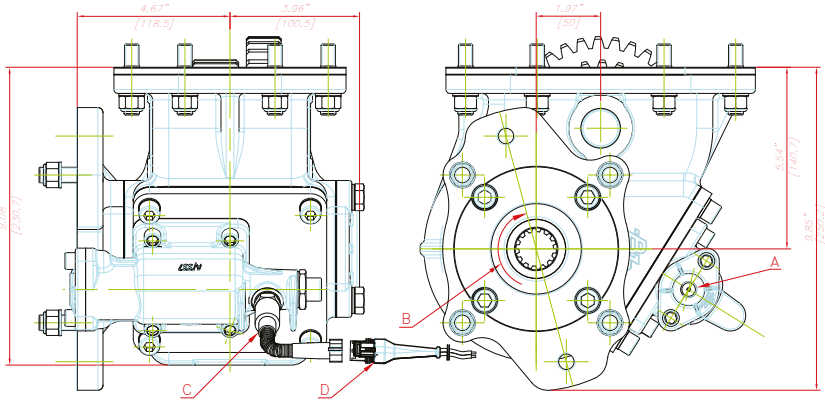
SAE "B"



SAE "C"



SAE "C"2/4 bolt SAE "C"2/4 taladros



	Notas		Notes
A	Air connections, thread ¼" BSP	A	Tomas de aire, rosca ¼" GAS
B	Rotation	B	Sentido de giro
C	Indicator switch	C	Indicador de funcionamiento

SAE 8 Holes, Heavy duty
SAE 8 Taladros, Reforzado

Pneumatic
Neumático

Part Number Breakdown Codificación PTO

8500 X J A 01 1 IC

SERIES:

8500 8 bolt, heavy duty
8510 8 bolt, heavy duty, deep mount

VERSIONS:

X Standard

RATIO: (Z=35)

1:0.61 (B)
1:0.72 (C)
1:0.85 (E)
1:1.08 (J)
1:1.27 (O)
1:1.38 (R)
1:1.50 (S)
1:1.63 (T)

SHIFTER TYPE:

A Air with 101 Air Kit
N Air without 101 Air Ki
S Air with Aptiv Connector

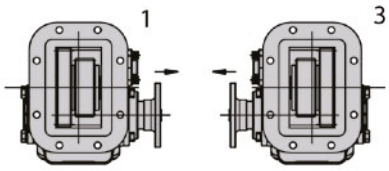
{ **902099** POS 1/4
903599 POS 2/3 }

OUTPUT TYPE:

DA ISO 4 bolt
IC Flange SAE 1400
RA SAE "B" 2/4 bolt 13T rotatable
RB SAE "BB" 2/4 bolt 15T rotatable
RJ SAE "C" 4 bolts
RK SAE "C" 2-4 bolts

ASSEMBLY ARRANGEMENTS:

1 Right, Forward
3 Left, Forward



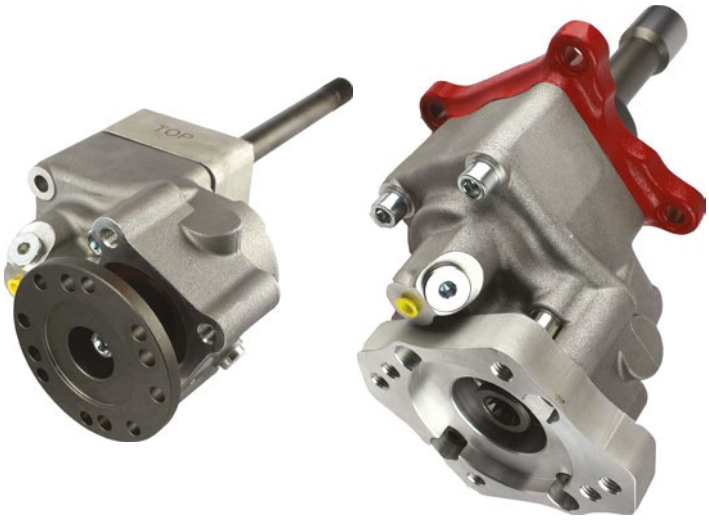
INPUT GEAR:

01 Fuller series
02 Universal
24 Mack
75 Endurant HD
77 Endurant XD, XD Pro

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

EATON ENDURANT HD / XD / XD PRO

Rear Mount Pneumatic
Posterior Neumático



Description Descripción

Heavy Duty, rear PTO rotated output. Pneumatic shifting. Three different internal ratios, most standard output types. Optional: Passing contact switch (Bayonet type) or pressure switch.

Toma de fuerza reforzada, con salida girada. Accionamiento neumático. Tres posibles relaciones internas. Disponible con los tipos de salida más estándar. Indicador de funcionamiento opcional de contacto (tipo bayoneta) o presostato.

Datos Principales Main Data

Internal Ratio Relación Interna	105%	130%	150%
Max. Torque Par máximo	382 Lb.ft // 510 Nm	293 Lb.ft // 390 Nm	254 Lb.ft // 339 Nm
Max. Power Potencia máxima	95 HP // 70 Kw	95 HP // 70 Kw	95 HP // 70 Kw
Mounting position Lado de montaje	Rear Posterior		
Rotation Sentido de giro	ClockWise Derecho		
Engine to PTO ratio Relación motor–Toma de Fuerza	Check Application book / Consultar libro de aplicaciones		
Weight Peso	23.6 Lb // 10.7 Kg		

Part Number Breakdown Codificación PTO

95 X 13 E IB

SERIES:

95

VERSIONS:

X Standard
R Retarder

RATIO: (Z=35)

10 – 100%
13 – 130%
15 – 150%

OUTPUT TYPE:

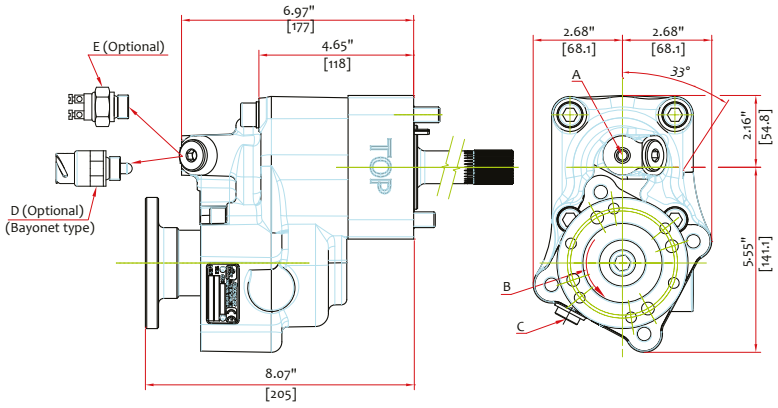
SA – SAE B 13T.
SB – SAE BB 15T.
DA – ISO 4
IB – Flange SAE 1300
IC – Flange SAE 1400

TRANSMISSION MAKER:

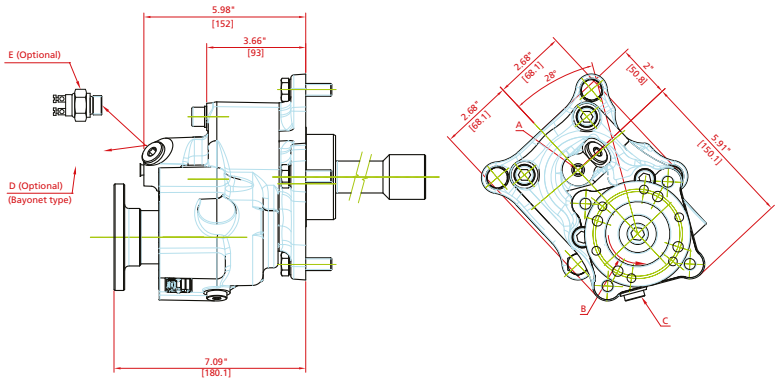
E – Endurant HD
D – Endurant XD / XD Pro

Rear Mount Pneumatic
Posterior Neumático

ENDURANT HD



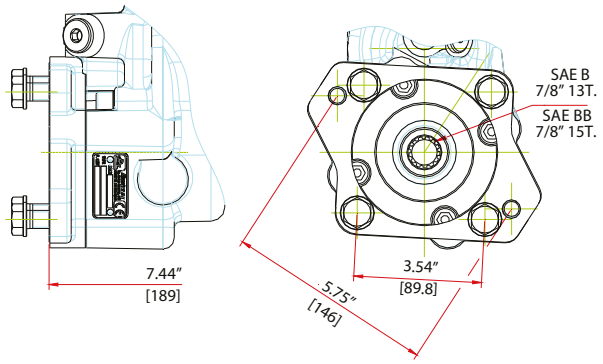
ENDURANT XD / XD PRO



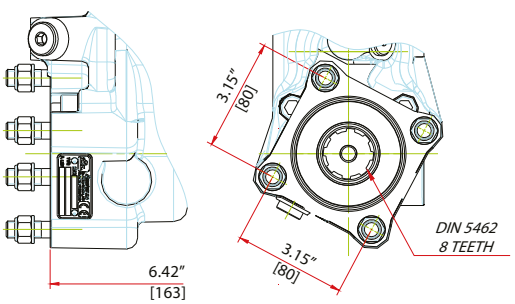
Notas		Notes	
A	Air connection, thread 1/8" BSP	A	Toma de aire, rosca 1/8" GAS
B	Rotation	B	Sentido de giro
C	Oil Drain Plug	C	Tapón de drenaje
D	Passing contact switch P/N. 9024999	D	Interruptor de contacto (9024999)
E	Pressure switch P/N 100070018	E	Interruptor neumático (100070018)

Standard output types Tipos de salida más utilizadas

Pump Bomba SAE B 13T SAE BB 15T



Pump Bomba DIN 5462

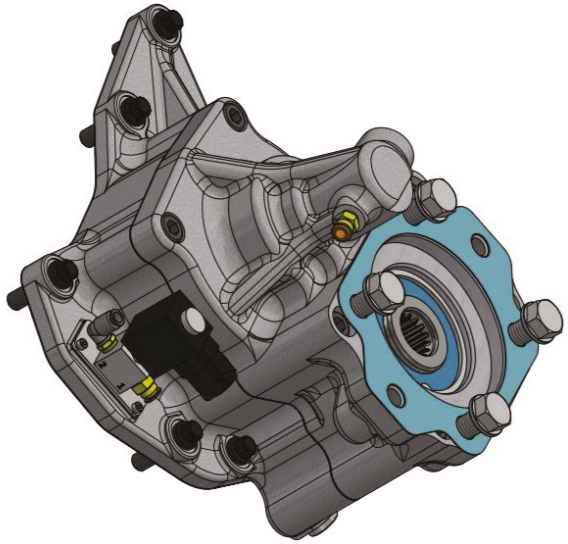


Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

Detroit DT-12

Rear Mount Pneumatic
Posterior Neumático



Description Descripción

Heavy duty, rear PTO with different output types: SAE BB 2/4 bolt (15 tooth), DIN 4 bolt (8 tooth) or drive Flange output. Electric over pneumatic shifting. Indicator switch included.

Toma de fuerza reforzada para montaje posterior, diferentes tipos de salida: Bombas SAE BB 2/4 taladros (Z15), ISO 4 taladros (Z8) o plato de transmisión. Accionamiento neumático. Indicador de funcionamiento de contacto (tipo bayoneta)

Main Data Datos Principales

Internal Ratio Relación interna			130%	
Max. Torque Par máximo	DIN		406 Lb.ft // 550 Nm	
	SAE BB		325 Lb.ft // 440 Nm	
Max. Power Potencia máxima	DIN		120 HP // 89 kW	
	SAE BB		92 HP // 69 kW	
Power (1000 r.p.m.) Potencia (1000 r.p.m.)			28 C.V // 21 kW	
Mounting position Lado de montaje			Posterior Rear	
Rotation Sentido de giro			Engine Motor	
Weight Peso			28 Lb // 13 Kg	
Engine to PTO ratio (% final) Relación motor - Toma de Fuerza	Transmission	% Low	% High	Shaft Kit
	DT12-DA/14.93-1.0	105	134	7018304
	DT12-OA/14.96-1.0	134	172	
	DT12-DB/14.93-1.0	105	134	700904
	DT12-OB/14.96-1.0	134	172	

Part Number Breakdown Codificación PTO

120 X 13 D SB

SERIES:

120

VERSIONS:

X Standard

RATIO: (Z=35)

13 – 130%

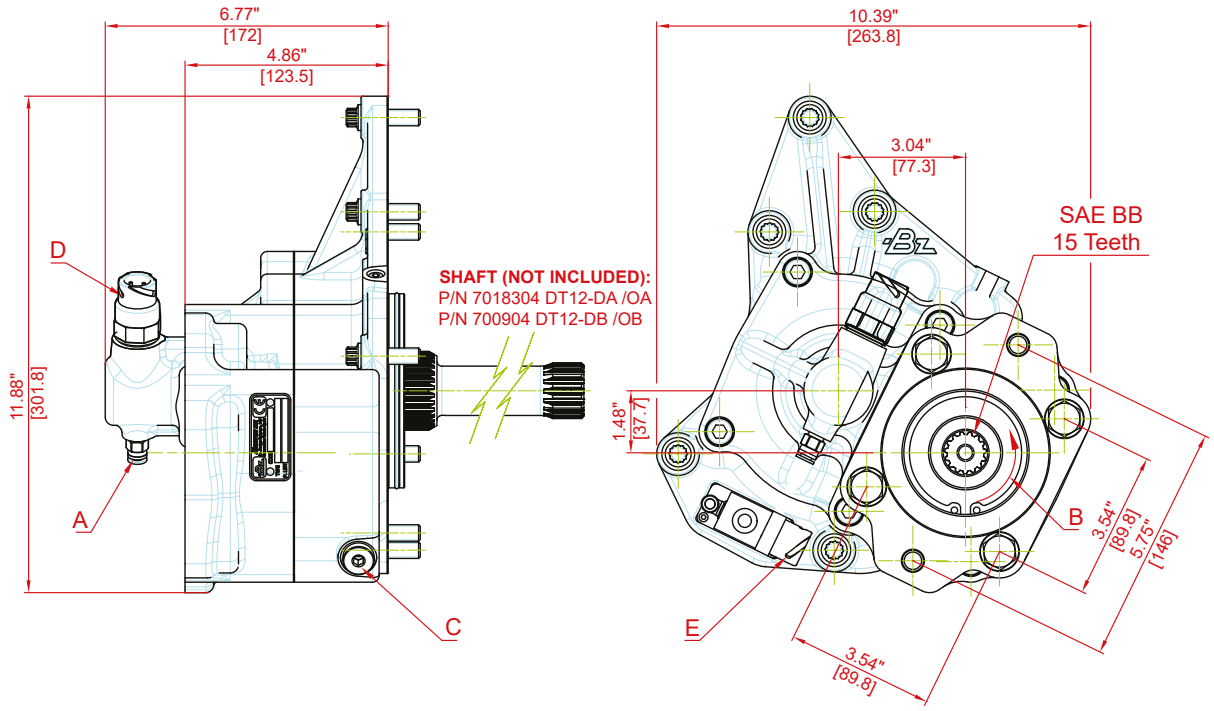
TRANSMISSION MAKER:

D – Daimler

OUTPUT TYPE:

SB – SAE BB 15T.
DA – ISO 4
IB – Flange SAE 1300
IC – Flange SAE 1400

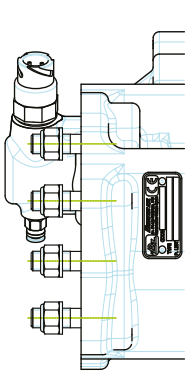
Rear Mount Pneumatic
Posterior Neumático

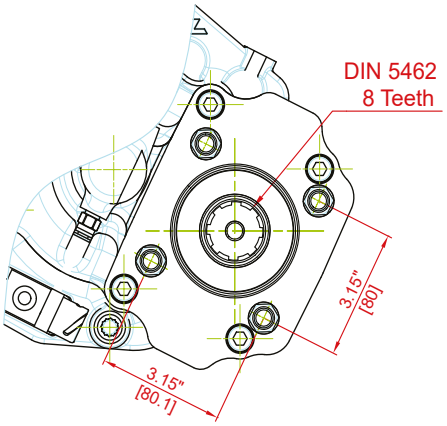


Notas	Notes		
A	Air connection, thread 1/8" BSP	A	Toma de aire, rosca 1/8" GAS
B	Rotation	B	Sentido de giro
C	Oil Drain Plug	C	Tapón de drenaje
D	Passing contact switch (included)	D	Interruptor de contacto (incluido)
E	Pneumatic Electrovalve (included)	E	Electroválvula Neumática (incluido)

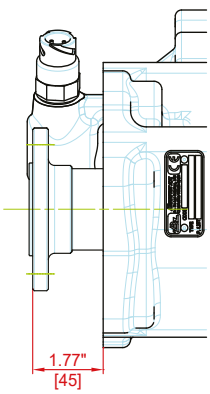
Output types Tipos de salida

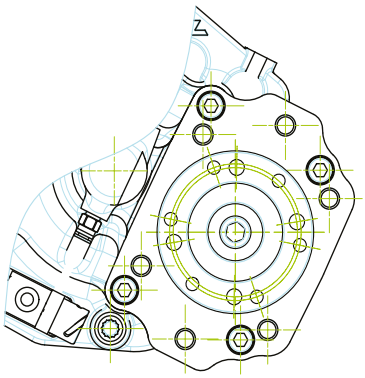
Pump Bomba DIN 5462





Drive Flange Plato de transmisión





Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Reverse rotation adapter SAE 6 holes
Adaptador inversor de giro SAE 6 taladros

AD_ _ _



Description Descripción

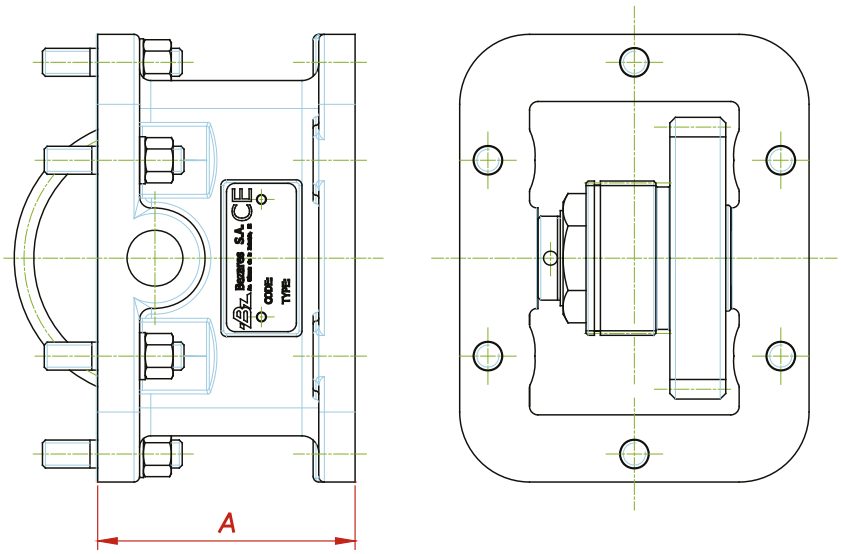
Our variety of rotation reverse adapters make possible to change the PTO rotation, and resolve any interference problem.

Nuestra variedad de adaptadores inversores de giro posibilitan cambiar, el sentido de rotación, y resolver cualquier problema de interferencias.

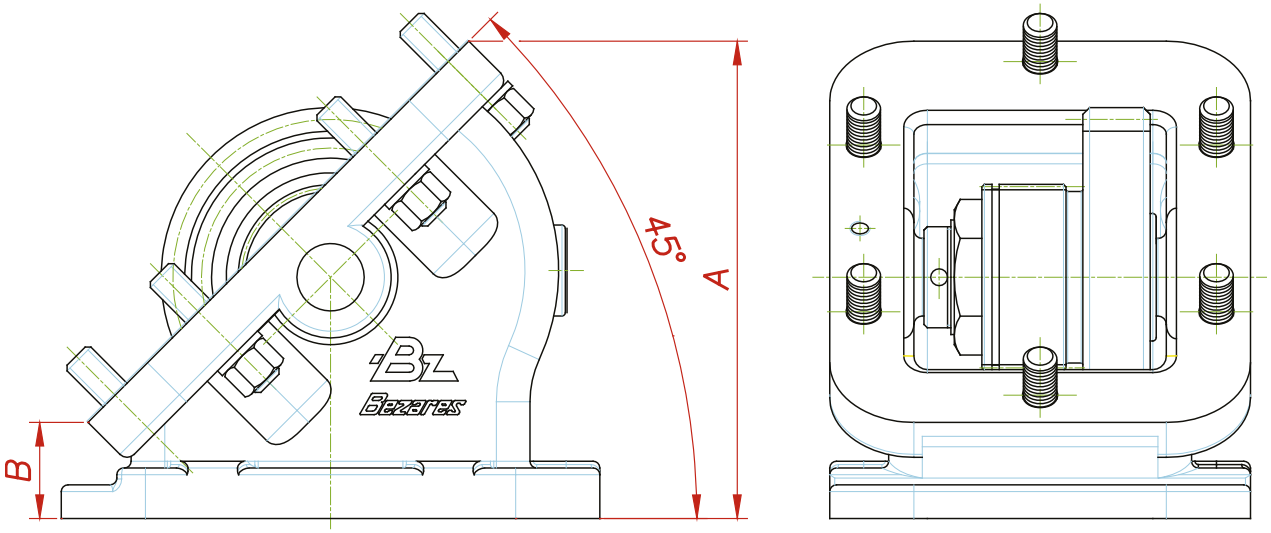
Main Data Datos Principales				
Adapter Kit Kit adaptador		A	B	Weight Peso (Lb)
Right Recto	AD 626 Series	3.64"	-	14
	AD 726 Series (deep mount)	3.42"	-	12
45°	AD 645 Series	5.61"	1.16"	14
	AD 745 Series (deep mount)	5.45"	1"	12

Reverse rotation adapter SAE 6 holes
Adaptador inversor de giro SAE 6 taladros

AD 626, AD 726 (Straight Recto)



AD 645, AD 745 (45°)



Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Reverse rotation adapter SAE 6 holes
Adaptador inversor de giro SAE 6 taladros

AD-622

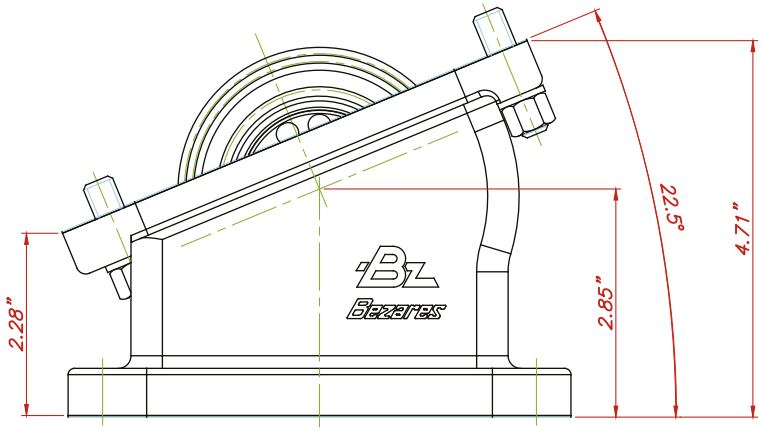


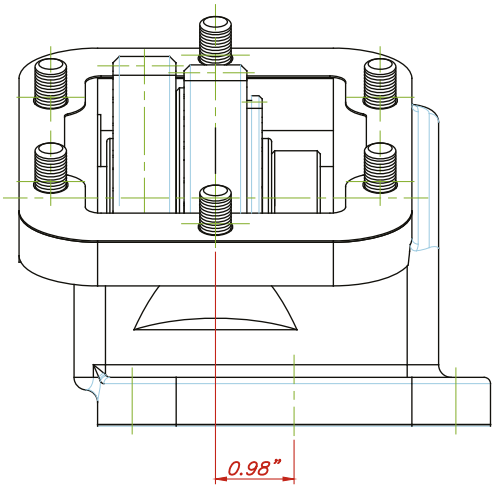
Description Descripción

This adapter is only suitable for position 1 (right side). This adapter fits all 1000 PTO series with input gear 01*, and it permits to asembly all helical input gears to the transmission. When this adapter is used, the total engine-pto ratio is reduced to 95%.

Este adaptador sólo es adecuado para la posición 1 (lado derecho) y se ajusta a toda la serie 1000 de tomas de fuerza con engranaje 01*. Permitiendo ademas ensamblar cualquier engranaje de mando helicoidal a la transmisión. Cuando este adaptador sea utilizado la relación total entre motor y toma de fuerza se reducirá al 95%.

Main Data Datos Principales	
Weight Peso (Lb)	16

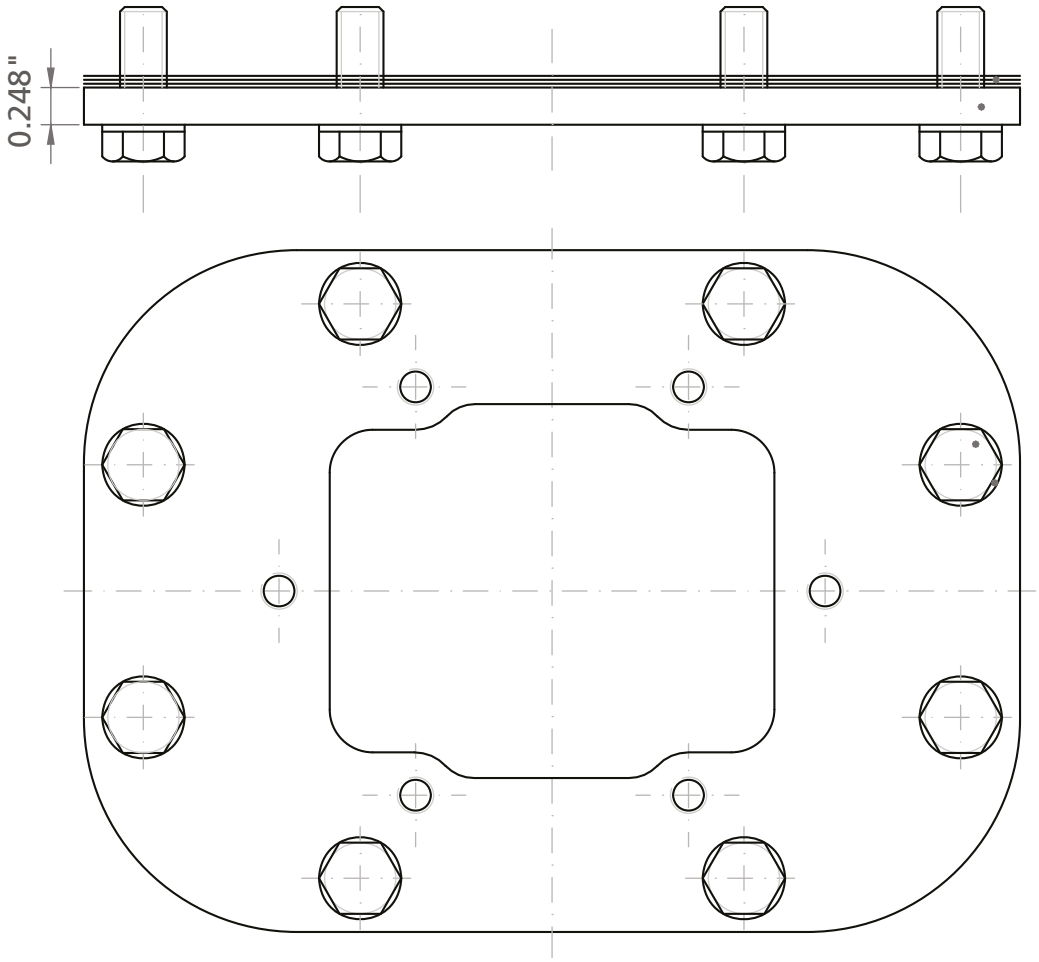




6 to 8 Bolt reducer plate

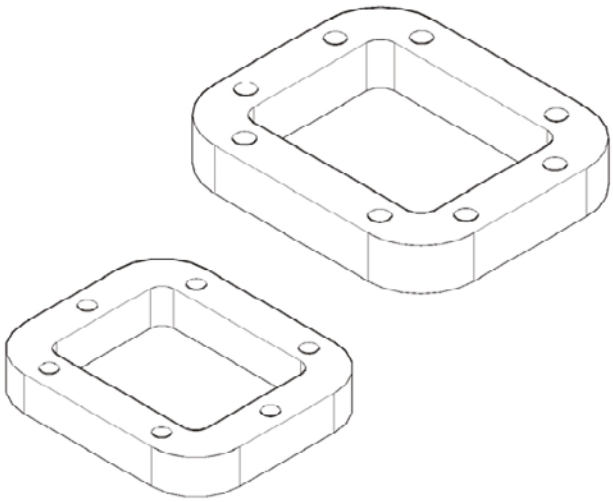
Adaptador reductor de 6 a 8 taladros.

AD68248 – 6 to 8 Bolt Reducer Plate



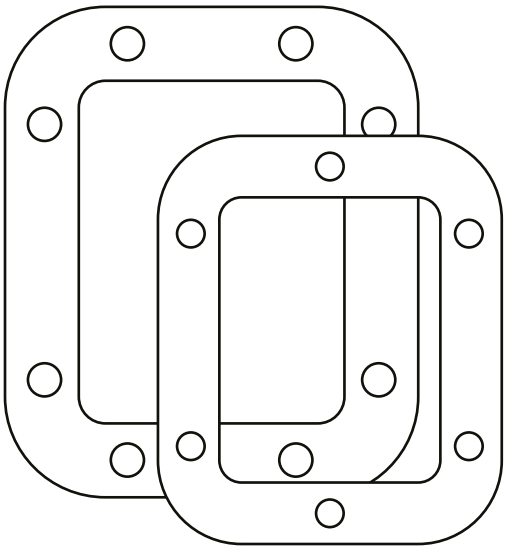
Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

6 & 8 bolt Shims: 1000 / 1010 / 2000 / 2010 Series



PART	DESCRIPTION
6140S	6 bolt spacer. 0.140" (3.55 mm)
6165S	6 bolt spacer. 0.165" (4.19mm)
6187S	6 bolt spacer. 0.187" (4.75mm)
6200S	6 bolt spacer. 0.200" (5.08mm)
6240S	6 bolt spacer. 0.240" (6.09 mm)
6400S	6 bolt spacer. 0.400" (10.16mm)
6500S	6 bolt spacer. 0.500" (12.7 mm)
6550S	6 bolt spacer. 0.550" (13.97mm)
6562S	6 bolt spacer. 0.562" (14.275mm)
6700S	6 bolt spacer. 0.700" (17.78mm)
6800S	6 bolt spacer. 0.800" (20.32mm)
8190S	8 bolt spacer. 0.190" (4.826mm)
8248S	8 bolt spacer. 0.248" (6.29mm)
8295S	8 bolt spacer. 0.295" (7.49mm)
8600S	8 bolt spacer. 0.600" (15.24mm)
8700S	8 bolt spacer. 0.700" (17.78mm)

Gaskets



PART	DESCRIPTION
GA091	RA flange gasket
GA4015EC	End cover gasket 0.015" thick
GA4015SC	Shifter cover gasket
GA6010	6 bolt pattern .010 thickness
GA6015	6 bolt pattern .015 thickness
GA6020	6 bolt pattern .020 thickness
GA6032	6 bolt pattern .032 thickness
GA6062	6 bolt pattern .062 thickness
GA6093	6 bolt pattern .093 thickness
GA6125	6 bolt pattern .125 thickness
GA8010	8 bolt pattern .010 thickness
GA8015	8 bolt pattern .015 thickness
GA8020	8 bolt pattern .020 thickness
GA8032	8 bolt pattern .032 thickness
GA8062	8 bolt pattern .062 thickness
GA8093	8 bolt pattern .093 thickness
GA8125	8 bolt pattern .125 thickness

Stud Kits

PART	DESCRIPTION
S1	6 bolt SAE mounting stud Kit - 50mm (furnished with 6 bolt pto)
S2	8 bolt SAE mounting stud Kit - 53mm (furnished with 8 bolt pto)
S3	6 bolt SAE mounting stud Kit - 57 mm
S4	8 bolt SAE mounting stud Kit
S5	6 bolt SAE mounting stud Kit - 63 mm
S6	8 bolt SAE mounting stud Kit
S7	6 bolt SAE mounting stud Kit - 63mm
S8	8 bolt SAE mounting stud Kit
S9	6 bolt SAE mounting stud Kit
S10	8 bolt SAE mounting stud Kit
S11	6 bolt SAE mounting stud Kit

PART	DESCRIPTION
M1	6 bolt metric mounting stud Kit (required on all FRO fuller transmissions)
M2	8 bolt metric mounting stud Kit (required on all FRO fuller & Endurant transmissions)
M5	6 bolt metric mounting stud Kit
M7	6 bolt metric mounting stud Kit
M9	6 bolt metric mounting stud Kit
M11	6 bolt metric mounting stud Kit
M17	6 bolt metric mounting stud Kit

Input Gears

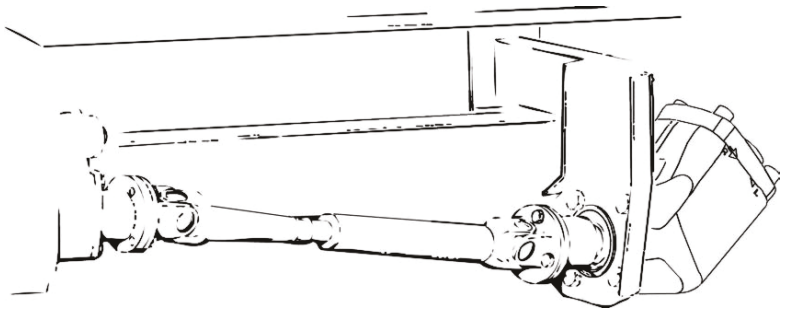
#	Description	N° of teeth
01	6 Pitch 20° SPUR - FULLER SERIES R/675	22
02	5 Pitch 20° SPUR - UNIVERSAL R/683	19
03	6 Pitch 17° 30′ SPUR - SPICER R/736	22
04	6 Pitch 25° SPUR - ALLISON CLT700 R/965	23
05	6 Pitch 17° 30′ - 26° 10′ 37′′ LH - SPICER R677	21
06	6.100 Pitch 25° - 18° 40′ 48′′ RH - FULLER TREMEC R/679	22
07	6.540 Pitch 18° 27′ 54′′ - 23° 26′ 48′′ LH Â - NAVISTAR R/693	23
08	7 Pitch 17° 30′ - 28° 04′ 23′′ LH - SPICER R/682	24
09	7 Pitch 20° - 20° RH - SPICER R/684	25
10	7 Pitch 20° - 20° LH - CHEVY R/678	25
11	7.36 Pitch 20° - 24° LH - CHEVY-SPICER R/699	25
13	7.62 Pitch 18° 29′ 20′′ - 23° 12′ 57′′ LH - NEW PROCESS R/718	26
14	10.1 Pitch 20° SPUR - FULLER R/737	39
15	6.100 Pitch 25° - 32° 30′ LH - FS4005C /4205C R/717	19
16	10.3673 Pitch 20° - 28° LH - ZF R/716	36
17	6.35 Pitch 20° - 22° LH - EATON 6305A R/680	22
18	6.100 Pitch 20° 30′ - 29° LH - FS3005 /4005AB R/681	19
20	7.9375 Pitch 22° 29′ 55′′ - 30° LH - DODGE R/701	26
21	10.16 Pitch 17° - 28° LH - S5-42/5.72 R/676	29
22	6.100 Pitch 25° - 32° 16′ 48′′ LH - EATON FULLER R/738	18
23	5.700 Pitch 25° - 38° 42′ LH - EATON FS3005B R/714	17
24	6.4800 Pitch 17° 39′ 10′′ SPUR - MACK R/695	23

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

#	Description	N° of teeth
25	7.500 Pitch 22° - 15° LH - EATON FS7206A R/715	28
26	6.5 Pitch 20° - 23° LH - EATON 6105B R/918	19
27	10.10 Pitch 21° 30’ SPUR - EATON FULLER R/692	40
28	7.0 Pitch 23° - 26° LH - FULLER R/771	24
30	7 Pitch 25° - 30° 46’ 48’’ LH - EATON FULLER R/698	22
33	6 Pitch 17° 30’ - 22° 15’ LH - SPICER R/697	21
34	7.00 Pitch 17° 30’ - 18° LH - SPICER R/696	26
36	6 Pitch 20° - 17° 40’ 41” LH - NEW PROCESS R/739	22
39	8.0829 Pitch 20° - 30° LH - WARNER R/741	26
41	8.0829 Pitch 20° - 30° LH - WARNER R/743	27
42	6.649 Pitch 20° - 21° 30’ LH - FULLER R/770	23
50	9.229 Pitch 20° - 36° 2’ LH - ZF 6S-750 R/694	26
51	7.0 Pitch 22° 30’ - 19° LH - DODGE R/702	25
52	9.96 Pitch 20° - 28° 30’ LH - ZED F R/700	34
55	6.7733 Pitch 22° 30’ - 23° 51’ 56’’ LH - MACK/RENAULT R/748	23
57	6.35 Pitch 20° SPUR - ZED F R/740	23
60	6.004 Pitch 20° SPUR - ALLISON	25
61	9.236 Pitch 20° - 36° LH - FORD R/754	26
63	10.16 Pitch 20° - 19° 15’ 22’’ RH - ALLISON WORLD TRANS	49
64	6.864 Pitch 20° SPUR - ALLISON 1000/2000/2400 series	26
65	14.229 Pitch 0° 17’ 59’’ SPUR - FORD TorqueShift 3900 Series	57
66	8.38 Pitch 17° 30’ - 33° 6’ LH - FULLER R/862	27
67	8.466 Pitch 20° SPUR - AISIN	32
68	8.10 Pitch 20° - 29° 28’ 12’’ LH - TREMEC R/897	27
69	9.407 Pitch 17° 30’ - 26° 28’ LH - 1200 Series Dodge G-56	32
70	8.03 Pitch 17° 30’ - 29° 57’ 58’’ LH - MERCEDES G60 R/956	28
72	9.719 Pitch 19° SPUR - EATON RTS11909 G/054	38
73	9.547 Pitch 20° - 19° 44’ 6’’ LH - CATERPILLAR CX28/31/35	45
75	8.048 Pitch 20° - 28° 58’ RH - EATON ENDURANT HD G/210	27
77	7.165 Pitch 20° SPUR - EATON ENDURANT XD, XD Pro G/227	25

Universal Joint Angles



Shaft Speed (r.p.m.)	Max. Operating Angle
500	11°30’
1000	11°30’
1500	11°30’
2000	8°40’
2500	7°00’
3000	5°50’

Universal Joint Torques

Size	1000	1280	1310	1410
Torque Lb.Ft (Nm)	160 (215)	320 (430)	500 (680)	660 (890)

*Driveshaft applications are dependent on many factors such as: torque, shaft lenght, cardan series and speed.

Suggested PTO Percentages

TYPE	Engine r.p.m.	PTO %
Aerial ladder and platforms	800-1500	80-130
Aerial bucket manlifts	800-1200	80-130
Aerial cranes digger derricks	800-1200	80-130
Auto carriers	idle	125-210
Auto tow trucks	idle-1200	90-120
Heavy-duty tow trucks	1000-1500	90-130
AIR COMPRESSORS		
85 ft. per min capacity	1200-2000	100
125 ft. per min capacity	1200-2000	100
180 ft. per min capacity	1200-2000	100
Blowers pneumatic (Normally uses 1 ¼" round shaft)	1500-3500	150-250
DUMP BODIES		
Small single axle	1000-2000	50-80
Medium single-tandem	1000-2000	80-100
Large tri-axle	1000-2000	60-130
Dump trailers	1000-2000	80-130
Dump trailers with moving floor	1000-1800	80-130
HYDRAULIC PUMPS		
1-15 gpm	idle-3000	80-130
16-35 gpm	idle-3000	80-130
36+ gpm	idle-3000	80-130
PRODUCT PUMPS		
Refuse	1000-1800	80-130
Snow plows	1000-3000	60-90
Spreaders mechanical	1200-2500	45-60
Spreaders hydraulic	1200-2500	75-90
Tailgates	idle	60-75
Walking floors	1000-1500	125-175
WINCHES (see hydraulic pumps)		

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

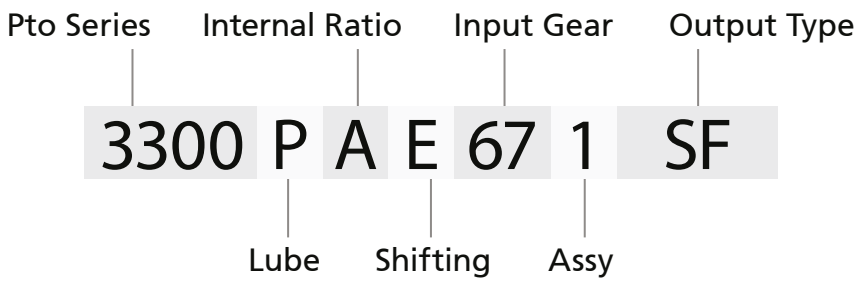
PTO Application

Brands	Pag.
Aisin	93
Allison	97
Chevrolet	107
Detroit Diesel	109
Eaton	112
Ford	229
Mack	231
Mercedes	259
New Process	274
New Venture	278
Rockwell-ZF-Meritor	284
Spicer	301
Volvo	399
Warner	406
ZF	410

Aisin Index

Transmission Model	Pag.
450-43LE	98
A443	98
A443E	98
A445	98
A460	99
A465	98
A860E (Hino)	99
AS68RC	99
AS69RC	99
AX45X2	98
MO35A4	98
MO36A6	98
MY600	98

EXAMPLE:



Aisin

450-43LE **A443** **A443E** **A445** **MO35A4**

AIS.01

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)			250	49	M1A	(AI1,3)		ENG	67	
		C (73)		112	250	49	M1A	(AI1,3)		ENG	67	
	3300	Z (40)			250	49	M1A	(AI1,3)		ENG	67	
		A (50)		76	250	49	M1A	(AI1,3)		ENG	67	
		B (55)		100	250	49	M1A	(AI1,3)		ENG	67	
		C (73)		112	250	49	M1A	(AI1,3)		ENG	67	

GENERAL NOTES:

All Aisin transmissions require special metric mounting studs, m10-1.25 X 50mm (bz#117020053) and special hose kits to fit the transmission pressure and lube ports.

There is limited direct mount pump clearance.

FOOT NOTES:

AI1: Requires Lube Hose assembly PLH399A (BZ #9041399) and Pressure Hose (for electric/hydraulic shift) assembly PLH499A (BZ #9041499).

AI3: PTO speeds will vary due to Torque Converter slippage.

A465 **AX45X2** **MO36A6** **MY600**

AIS.02

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	3300	Z (40)			250	49	M1A	(AI1,3)	GA6032	ENG	67	
		A (50)		108	250	49	M1A	(AI1,3)	GA6032	ENG	67	
		B (55)		119	250	49	M1A	(AI1,3)	GA6032	ENG	67	
		C (73)		157	250	49	M1A	(AI1,3)	GA6032	ENG	67	

GENERAL NOTES:

All Aisin transmissions require special metric mounting studs, m10-1.25 X 50mm (bz#117020053) and special hose kits to fit the transmission pressure and lube ports.

There is limited direct mount pump clearance.

FOOT NOTES:

AI1: Requires Lube Hose assembly PLH399A (BZ #9041399) and Pressure Hose (for electric/hydraulic shift) assembly PLH499A (BZ #9041499).

AI3: PTO speeds will vary due to Torque Converter slippage.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Aisin

AS68RC AS69RC

AIS.03

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	3300	Z (40)			250	49	M1A	DODGE (AI1,2,3)		ENG	67	
		A (50)		108	250	49	M1A	DODGE (AI1,2,3)		ENG	67	
		B (55)		119	250	49	M1A	DODGE (AI1,2,3)		ENG	67	
		C (73)		157	250	49	M1A	DODGE (AI1,2,3)		ENG	67	

GENERAL NOTES:

All Aisin transmissions require special metric mounting studs, m10-1.25 X 50mm (bz#117020053) and special hose kits to fit the transmission pressure and lube ports.

There is limited direct mount pump clearance.

Dodge-Converter lock up at 1200 RPM engine. PTO aperture added to driver's side, which requires a special low profile PTO. Use the same PTO drive gear for both sides/apertures as AS68RC.

FOOT NOTES:

AI1: Requires Lube Hose assembly PLH399A (BZ #9041399) and Pressure Hose (for electric/hydraulic shift) assembly PLH499A (BZ #9041499).

AI2: Clearance for PTO and pump mounting is very limited. Check installation envelope before attempting installation.

AI3: PTO speeds will vary due to Torque Converter slippage.

A460 A860E (Hino)

AIS.04

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	3300	Z (40)			250	49	M1A	(AI1,3)		ENG	67	
		A (50)		98	250	49	M1A	(AI1,3)		ENG	67	
		B (55)		108	250	49	M1A	(AI1,3)		ENG	67	
		C (73)		144	250	49	M1A	(AI1,3)		ENG	67	

GENERAL NOTES:

All Aisin transmissions require special metric mounting studs, m10-1.25 X 50mm (bz#117020053) and special hose kits to fit the transmission pressure and lube ports.

There is limited direct mount pump clearance.

FOOT NOTES:

AI1: Requires Lube Hose assembly PLH399A (BZ #9041399) and Pressure Hose (for electric/hydraulic shift) assembly PLH499A (BZ #9041499).

AI3: PTO speeds will vary due to Torque Converter slippage.

For complete part numbers, consult the PTO Series section (page 25)

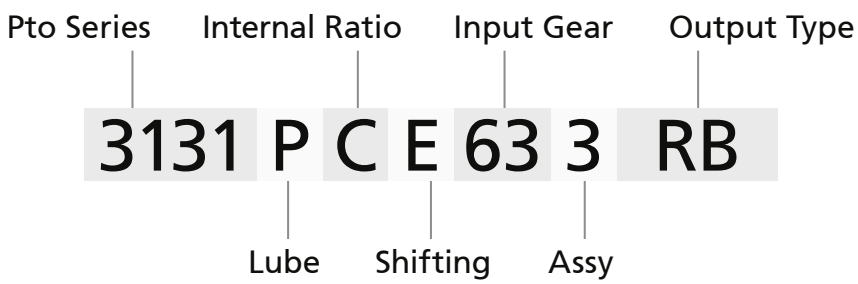
Allison Index

Transmission Model	Pag.
1000	102
1000 EVS	102
1000 MH	102
1000 RDS	102
2000	102
2100 EVS	102
2100 MH	102
2100 RDS	102
2200 EVS	102
2200MH	102
2200 RDS	102
2300 RDS	102
2400	102
2500 EVS	102
2500 MH	102
2500 RDS	102
3000 EVS	103
3000 MH	103
3000 RDS	103
3000 TRV	103
3200 TRV	103
3500 EVS	103
3500 RDS	103
4000 EVS	104
4000 MH	104
4000 RDS	104
4000 TRV	104
4500 EVS	104
4500 RDS	104
4700 EVS	104
4700 OFS	104
4700 RDS	104
4800 EVS	104
AT-540	105
AT-542	105
AT-543	105
AT-545	105
B210	102
B220	102
B300	103
B400	103
B500	104
CLBT-750	106

Transmission Model	Pag.
CLBT-750(OPT.8BOLT)	109
CLBT-754	106
CLT-750	106
CLT-750(OPT.8BOLT)	109
CLT-9485	108
CLT-9880	108
CLT-9884	108
CLT-9885	108
HD-4060P	104
HD-4070P	104
HD-4560P	104
HT-740CRD	106
HT-740D	106
HT-740D(OPT.8BOLT)	109
HT-740DRD	106
HT-740T	106
HT-750CRD	106
HT-750CRD(OPT.8BOLT)	109
HT-750D	106
HT-750DP	106
HT-750DRD	106
HT-750DRD(OPT.8BOLT)	109
HT-750DT	106
HT-750HT	106
HT-750T	106
HT-754CR	106
HT-754CR(OPT.8BOLT)	109
M-5600	105
M-5610	105
M-6600	105
M-8610	108
M-9600	108
M-9800	108
MD-3060P	103
MD-3060P W/ Top opening	107
MD-3066P	103
MD-3066P W/ Top opening	107
MD-3070PT	103
MD-3560P	103
MD-3560P W/ Top opening	107
MT-640	108
MT-643	108
MT-644	108

Transmission Model	Pag.
MT-644CR	108
MT-647	108
MT-648	108
MT-650	108
MT-653	108
MT-653DR	108
MT-654	108
S-5600	105
S-6600	105
S-8610	108
S-9600	108
S-9800	108

EXAMPLE:



Allison

1000
1000 EVS
1000 RDS
1000 MH
2000
2100 EVS
2100 RDS
2100 MH
2200 EVS
2200 RDS
2200MH
2300 RDS
2400
2500 EVS
2500 MH
2500 RDS
B210
B220

ALL.01

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		135	250	49	M1	(A2,3,4,5,6,7,8,9,10,11,12)		ENG	64	
3300		Z (40)		99	250	49	M1	(A2,3,4,5,6,7,8,9,10,11,12)		ENG	64	
		A (50)		123	250	49	M1	(A2,3,4,5,6,7,8,9,10,11,12)		ENG	64	
		B (55)		135	250	49	M1	(A2,3,4,5,6,7,8,9,10,11,12)		ENG	64	
		C (73)		150	250	49	M1	(A2,3,4,5,6,7,8,9,10,11,12)		ENG	64	

GENERAL NOTES:

When using 1000 series on Allison, light gear noise could develop.

Allison transmission identification:

Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

Generation 5 models have a converter lock up default of 1150 RPM engine speed. TCM's converter lock up can be set down to 900 RPM of engine.

FOOT NOTES:

A2: Must include proper "T" adapter fitting for pressure-lube hook-up into the cooler line:
MT600 Series Transmissions: FI401 (BZ #202120401)
AT500 Series Transmissions: FI511 (BZ #202120511)
HT700/CLT700/CLBT700 Series: FI521 (BZ #202120521)
1000/2000/B210/B220 Series: FI831 (BZ #202122831)

A3: Speeds shown are with transmission in torque converter lock-up. Â PTO must be connected to the "PTO Enable" circuit (refer to Allison Body-Builders guide) and the converter turbine speed must be above 1100 RPM in order to achieve lock-up.

A4: May not be installable on GM Pick-Up Chassis.

A5: PTO interferes with exhaust on Right Side opening of C4500 & C5500 series Top Kick or Kodiak chassis.

A6: Transmission PTO drive gear has a 250 lb/ft torque limit. That limit drops to 200 lb/ft per opening when 2 PTO's are used and lower the PTO torque ratings by 20%.

A7: Use the "3" assembly arrangement on the Right Side for the International 4300 series chassis.

A8: For Isuzu, Nissan, and Mitsubishi chassis prior to 2007 use "3" assembly and direct mount pump (only) on the Right Side. Use Left Side opening for 2007 and later.

A9: PTO is not installable on the Left Side opening of the GM 2001-2007 cab-chassis C/K3600 (Silverado & Sierra).

A10: Possible installation interference with transmission shift selector on Left Side. Â Contact vehicle manufacturer for recommendations for moving the control cable. Â Utilize the "1" assembly for Ford F650 and F750 chassis.

A11: Use Right Side opening on Isuzu, Nissan, & Mitsubishi chassis prior to 2007. Also, use Right Side on International 4000 series.

A12: On generation 5 models converter lock up default is 1150 RPM of engine speed. TCM can be programmed for converter lock up down to 900 RPM of engine.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Allison

3000 EVS **3000 RDS** **3200 TRV** **3500 RDS** **B400** **MD-3066P** **MD-3560P**
3000 MH **3000 TRV** **3500 EVS** **B300** **MD-3060P** **MD-3070PT**

ALL.02

10 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (50)		69	500	97	INCL			ENG	63	
		C (58)		80	500	97	INCL			ENG	63	
		E (68)		94	450	88	INCL			ENG	63	
	3131	G (78)		108	420	80	INCL			ENG	63	
		J (84)		117	400	76	INCL			ENG	63	
		M (97)		134	380	72	INCL			ENG	63	
		O (119)		165	350	66	INCL			ENG	63	
		B (50)		69	500	97	INCL			ENG	63	
		C (58)		80	500	97	INCL			ENG	63	
		E (68)		94	450	88	INCL			ENG	63	
	3151	G (78)		108	420	80	INCL			ENG	63	
		J (84)		117	400	76	INCL			ENG	63	
		M (97)		135	380	72	INCL			ENG	63	
		O (119)		165	350	66	INCL			ENG	63	
		B (54)		75	410	78	INCL			ENG	63	
		C (59)		82	400	76	INCL			ENG	63	
		E (70)		97	380	72	INCL			ENG	63	
	3252	G (76)		105	360	68	INCL			ENG	63	
		J (82)		114	340	65	INCL			ENG	63	
		M (96)		133	320	61	INCL			ENG	63	
		O (122)		169	270	51	INCL			ENG	63	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification:
Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

For complete part numbers, consult the PTO Series section (page 25)

Allison

4000 EVS
4000 MH
4000 RDS
4000 TRV
4500 EVS
4500 RDS
4700 EVS
4700 OFS
4700 RDS
4800 EVS
B500
HD-4060P
HD-4070P
HD-4560P

ALL.03

10 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (50)		99	500	97	INCL			ENG	63	
		C (58)		115	500	97	INCL			ENG	63	
		E (68)		135	450	88	INCL			ENG	63	
	3131	G (78)		154	420	80	INCL			ENG	63	3L 3R
		J (84)		166	400	76	INCL			ENG	63	
		M (97)		191	380	72	INCL			ENG	63	
		O (119)		236	350	66	INCL			ENG	63	
		B (50)		99	500	97	INCL			ENG	63	
		C (58)		115	500	97	INCL			ENG	63	
		E (68)		135	450	88	INCL			ENG	63	
	3151	G (78)		154	420	80	INCL			ENG	63	3L 3R
		J (84)		166	400	76	INCL			ENG	63	
		M (97)		192	380	72	INCL			ENG	63	
		O (119)		236	350	66	INCL			ENG	63	
		B (54)		107	410	78	INCL			ENG	63	
		C (59)		117	400	76	INCL			ENG	63	
		E (70)		139	380	72	INCL			ENG	63	
	3252	G (76)		150	360	68	INCL			ENG	63	3L 3R
		J (82)		162	340	65	INCL			ENG	63	
		M (96)		190	320	61	INCL			ENG	63	
		O (122)		242	270	51	INCL			ENG	63	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification:
Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

Allison

AT-540 AT-542 AT-543 AT-545 ALL.04

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	3000	B (35)		77	310	59	INCL	(A2)		ENG	60	
		C (44)		97	310	59	INCL	(A2)		ENG	60	
		E (49)		107	280	53	INCL	(A2)		ENG	60	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification:

Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

FOOT NOTES:

A2: Must include proper "T" adapter fitting for pressure-lube hook-up into the cooler line:

MT600 Series Transmissions: FI401 (BZ #202120401)

AT500 Series Transmissions: FI511 (BZ #202120511)

HT700/CLT700/CLBT700 Series: FI521 (BZ #202120521)

1000/2000/B210/B220 Series: FI831 (BZ #202122831)

M-5600 M-5610 M-6600 S-5600 S-6600 ALL.05

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		113	250	49	INCL	(A1,13)		ENG	04	
		B (55)		124	250	49	INCL	(A1,13)		ENG	04	
		C (73)		165	250	49	INCL	(A1,13)		ENG	04	
	2000	A (50)		45	250	49	INCL	(A1,13)		ENG	04	
		B (55)		50	250	49	INCL	(A1,13)		ENG	04	
		C (73)		66	250	49	INCL	(A1,13)		ENG	04	
	3600	B (33)		65	310	59	INCL	(A13)		OPP	04	
		C (42)		83	310	59	INCL	(A13)		OPP	04	
		E (50)		99	280	53	INCL	(A13)		OPP	04	
	3600	B (33)		62	310	59	INCL	(A13)		OPP	04	
		C (42)		79	310	59	INCL	(A13)		OPP	04	
		E (50)		94	280	53	INCL	(A13)		OPP	04	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification:

Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

FOOT NOTES:

A1: Engine must be turned off before engaging or disengaging a mechanically (air, cable, electric) shifted PTO. Does not apply to Hot Shift (Clutch Shift) PTOs.

A13: Not currently available. Please, consult with Bezares.

For complete part numbers, consult the PTO Series section (page 25)

Allison

CLBT-750
CLBT-754
CLT-750
HT-740CRD
HT-740D
HT-740DRD
HT-740T
HT-750CRD
HT-750D
HT-750DP
HT-750DRD
HT-750DT
HT-750HT
HT-750T
HT-754CR

ALL.06

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
3000		B (35)		109	310	59	INCL	(A2)		ENG	60	
		C (44)		137	310	59	INCL	(A2)		ENG	60	
		E (49)		152	280	53	INCL	(A2)		ENG	60	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification:

Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

FOOT NOTES:

A2: Must include proper "T" adapter fitting for pressure-lube hook-up into the cooler line:

MT600 Series Transmissions: FI401 (BZ #202120401)

AT500 Series Transmissions: FI511 (BZ #202120511)




HT700/CLT700/CLBT700 Series: FI521 (BZ #202120521)

1000/2000/B210/B220 Series: FI831 (BZ #202122831)

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

MD-3060P W/ Top opening **MD-3066P W/ Top opening** **MD-3560P W/ Top opening** **ALL.07**

10 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (50)		85	500	97	INCL			ENG	63	
		C (58)		98	500	97	INCL			ENG	63	
		E (68)		115	450	88	INCL			ENG	63	
	3131	G (78)		132	420	80	INCL			ENG	63	
		J (84)		142	400	76	INCL			ENG	63	
		M (97)		164	380	72	INCL			ENG	63	
		O (119)		201	350	66	INCL			ENG	63	
		B (50)		85	500	97	INCL			ENG	63	
		C (58)		98	500	97	INCL			ENG	63	
		E (68)		115	450	88	INCL			ENG	63	
	3151	G (78)		132	420	80	INCL			ENG	63	
		J (84)		142	400	76	INCL			ENG	63	
		M (97)		164	380	72	INCL			ENG	63	
		O (119)		201	350	66	INCL			ENG	63	
		B (54)		91	410	78	INCL			ENG	63	
		C (59)		100	400	76	INCL			ENG	63	
		E (70)		118	380	72	INCL			ENG	63	
	3252	G (76)		129	360	68	INCL			ENG	63	
		J (82)		139	340	65	INCL			ENG	63	
		M (96)		163	320	61	INCL			ENG	63	
		O (122)		207	270	51	INCL			ENG	63	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification:
Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

For complete part numbers, consult the PTO Series section (page 25)

Allison

MT-640
MT-643
MT-644
MT-644CR
MT-647
MT-648
MT-650
MT-653
MT-653DR
MT-654

ALL.08

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		160	250	49	INCL	(A2)		ENG	01	
	3000	B (35)		89	310	59	INCL	(A2)		ENG	60	
		C (44)		112	310	59	INCL	(A2)		ENG	60	
		E (49)		125	280	53	INCL	(A2)		ENG	60	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification: Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

FOOT NOTES:

A2: Must include proper "T" adapter fitting for pressure-lube hook-up into the cooler line:

MT600 Series Transmissions: FI401 (BZ #202120401)




AT500 Series Transmissions: FI511 (BZ #202120511)

HT700/CLT700/CLBT700 Series: FI521 (BZ #202120521)

1000/2000/B210/B220 Series: FI831 (BZ #202122831)

CLT-9485
CLT-9880
CLT-9884
CLT-9885
M-8610
M-9600
M-9800
S-8610
S-9600
S-9800

ALL.09

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		128	250	49	INCL	(A1,13)		ENG	04	
		B (55)		141	250	49	INCL	(A1,13)		ENG	04	
		C (73)		187	250	49	INCL	(A1,13)		ENG	04	
	2000	A (50)		57	250	49	INCL	(A1,13)		ENG	04	
		B (55)		62	250	49	INCL	(A1,13)		ENG	04	
		C (73)		83	250	49	INCL	(A1,13)		ENG	04	
	3600	B (33)		84	310	59	INCL	(A13)		ENG	04	
		C (42)		108	310	59	INCL	(A13)		ENG	04	
		E (50)		128	280	53	INCL	(A13)		ENG	04	
	3600	B (33)		78	310	59	INCL	(A13)		ENG	04	
		C (42)		99	310	59	INCL	(A13)		ENG	04	
		E (50)		118	280	53	INCL	(A13)		ENG	04	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification: Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

FOOT NOTES:

A1: Engine must be turned off before engaging or disengaging a mechanically (air, cable, electric) shifted PTO. Does not apply to Hot Shift (Clutch Shift) PTOs.

A13: Not currently available. Please, consult with Bezares.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com





Allison

CLBT-750(OPT.8BOLT)
CLT-750(OPT.8BOLT)

HT-740D(OPT.8BOLT)
HT-750CRD(OPT.8BOLT)

HT-750DRD(OPT.8BOLT)
HT-754CR(OPT.8BOLT)

ALL.10

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		73	250	49	INCL	(A1,2, 13)		ENG	04	
		B (55)		81	250	49	INCL	(A1,2, 13)		ENG	04	
		C (73)		107	250	49	INCL	(A1,2, 13)		ENG	04	
	2000	A (50)		42	250	49	INCL	(A1,2, 13)		ENG	04	
		B (55)		46	250	49	INCL	(A1,2, 13)		ENG	04	
		C (73)		62	250	49	INCL	(A1,2, 13)		ENG	04	
	3600	B (33)		77	310	59	INCL	(A2, 13)		OPP	04	
		C (42)		98	310	59	INCL	(A2, 13)		OPP	04	
		E (50)		117	280	53	INCL	(A2, 13)		OPP	04	
	3600	B (33)		45	310	59	INCL	(A2, 13)		OPP	04	
		C (42)		57	310	59	INCL	(A2, 13)		OPP	04	
		E (50)		68	280	53	INCL	(A2, 13)		OPP	04	

GENERAL NOTES:

When using 1000 series on Allison light gear noise could develop.

Allison transmission identification: Transmissions are now identified by the first 4 digits of the serial number on the tag:

6310 ..... **= All 1000 & 2000 series**
6510 ..... **= All 3000 & md series**
6610 ..... **= All 4000 & hd series**

FOOT NOTES:

A1: Engine must be turned off before engaging or disengaging a mechanically (air, cable, electric) shifted PTO. Does not apply to Hot Shift (Clutch Shift) PTOs.

A2: Must include proper "T" adapter fitting for pressure-lube hook-up into the cooler line:

MT600 Series Transmissions: FI401 (BZ #202120401)

AT500 Series Transmissions: FI511 (BZ #202120511)

HT700/CLT700/CLBT700 Series: FI521 (BZ #202120521)

1000/2000/B210/B220 Series: FI831 (BZ #202122831)

A13: Not currently available. Please, consult with Bezares.

For complete part numbers, consult the PTO Series section (page 25)

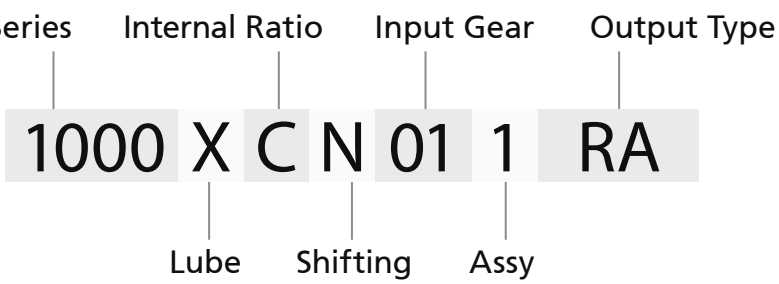
Chevrolet

CH-465 **GM-20** **M-20** **SM-465** **CHVR.01**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		38	250	49	INCL	4-SPEED 1968-91		OPP	11	
		C (73)		51	250	49	INCL	4-SPEED 1968-91		OPP	11	
		E (86)		61	225	44	INCL	4-SPEED 1968-91		OPP	11	
		J (95)		66	225	44	INCL	4-SPEED 1968-91		OPP	11	
		O (125)		87	200	39	INCL	4-SPEED 1968-91		OPP	11	
		R (137)		95	200	39	INCL	4-SPEED 1968-91		OPP	11	
		S (150)		104	190	37	INCL	4-SPEED 1968-91		OPP	11	
		T (165)		115	175	34	INCL	4-SPEED 1968-91		OPP	11	
6000		Forward (73)		51	150	30	INCL	4-SPEED 1968-91		BOTH	11	
		Reverse (83)		58	150	30	INCL	4-SPEED 1968-91		BOTH	11	

For complete part numbers, consult the PTO Series section (page 25)

EXAMPLE:



Detroit Diesel Index

Transmission Model	Pag.
DT-12 Detroit	**110**

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

DT-12 Detroit

DET.01

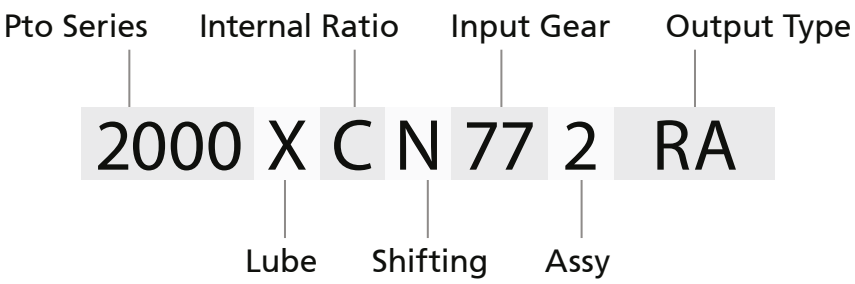
8 Bolts	PTO Series	% Internal Ratio	% Final Ratio		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
120X13D		130%	105	134	406	80	INCL		L=293 7018104 L=268 7018304	ENG		

For complete part numbers, consult the PTO Series section (page 25)

Eaton Endurant Index

Transmission Model	Pag.
EDX-16F118D	115
EDX-18F118D	115
EDXP-16F118D	115
EDXP-18F118D	115
EDXP-20F118D	115
EEO-14F112C	114
EEO-15F112C	114
EEO-16F112C	114
EEO-17F112C	114
EEO-18F112C	114
PO-14F112C	114
PO-15F112C	114
PO-16F112C	114
PO-17F112C	114
PO-18F112C	114
PXD-16F118D	115
PXD-18F118D	115
PXDP-16F118D	115
PXDP-18F118D	115

EXAMPLE:



Eaton Endurant

Endurant HD:
EEO-14F112C **EEO-16F112C** **EEO-18F112C**
EEO-15F112C **EEO-17F112C**

Paccar:
PO-14F112C **PO-16F112C** **PO-18F112C**
PO-15F112C **PO-17F112C**

END.01

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2010	A (50)		107	250	47	M2	(E1)		OPP	75	
		B (55)		117	250	47	M2	(E1)		OPP	75	
		C (73)		156	250	47	M2	(E1)		OPP	75	
		E (86)		185	225	43	M2	(E1)		OPP	75	 ↑ 1B
		J (95)			225	43	M2	(E1)		OPP	75	
		O (125)			180	34	M2	(E1)		OPP	75	
		R (137)			170	32	M2	(E1)		OPP	75	
		S (150)			155	29	M2	(E1)		OPP	75	
		T (165)			140	27	M2	(E1)		OPP	75	
	4110	B (57)		121	420	80	M2	(E1)		OPP	75	
		C (70)		149	350	66	M2	(E1)		OPP	75	 ↑ 1B
		E (86)		183	285	54	M2	(E1)		OPP	75	
		J (105)		224	235	44	M2	(E1)		OPP	75	
	8510	B (61)			500	95	M2	(E1)		OPP	75	
		C (72)		112	482	91	M2	(E1)		OPP	75	
		E (85)		132	392	74	M2	(E1)		OPP	75	
		J (108)		168	320	61	M2	(E1)		OPP	75	 ↑ 1B
		O (127)		197	266	50	M2	(E1)		OPP	75	
		R (138)			250	47	M2	(E1)		OPP	75	
		S (150)			225	43	M2	(E1)		OPP	75	
		T (163)			210	40	M2	(E1)		OPP	75	

4 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	95X10E	105%		144	382	78				ENG		
	95X13E	130%		178	293	78				ENG		
	95X15E	150%		206	254	78				ENG		

E1 - Caution: Eaton Transmission Division has established a Maximum Torque & Power Limit on the Transmission PTO gear. Do not exceed 382 lb-ft & 95 HP for any application. The PTO prep package must be factory installed before installing the Power Take-Off. Ensure the Endurant transmission TCM must have the J1939 circuit enabled for PTO applications. For PACCAR applications order the wire harness, P/N # P92-5075-2000, Qty. of 1 The PTO indicator switch must be modified to connect to P92-5075-2000 on one leg and the other leg goes to ground.

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Eaton Endurant

Endurant XD:
EDX-16F118D
EDX-18F118D

Endurant XD Pro:
EDXP-16F118D
EDXP-18F118D
EDXP-20F118D

Paccar:
PXD-16F118D
PXD-18F118D
PXDP-16F118D
PXDP-18F118D

END.02

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		102	250	47	INCL	(E2)		OPP	77	
		B (55)		112	250	47	INCL	(E2)		OPP	77	
		C (73)		149	250	47	INCL	(E2)		OPP	77	
		E (86)		179	225	43	INCL	(E2)		OPP	77	
		J (95)		194	225	43	INCL	(E2)		OPP	77	
		O (125)		255	180	34	INCL	(E2)		OPP	77	↑ 2/4B
		R (137)			170	32	INCL	(E2)		OPP	77	
		S (150)			155	29	INCL	(E2)		OPP	77	
		T (165)			140	27	INCL	(E2)		OPP	77	
	4100	B (57)		113	420	80	INCL	(E2)		OPP	77	
		C (70)		139	350	66	INCL	(E2)		OPP	77	
		E (86)		170	285	54	INCL	(E2)		OPP	77	
		J (105)		206	235	44	INCL	(E2)		OPP	77	↑ 2/4B
	4250	Output 1 C (96)		136	355	67	INCL	(E3)		OPP	77	
		Output 2 B (89)		127	380	72	INCL	(E3)		OPP	77	
	8500	B (61)		87	500	95	INCL	(E2)		OPP	77	
		C (72)		102	500	95	INCL	(E2)		OPP	77	
		E (85)		121	480	91	INCL	(E2)		OPP	77	
		J (108)		154	400	76	INCL	(E2)		OPP	77	
		O (127)		180	270	51	INCL	(E2)		OPP	77	↑ 2/4B
		R (138)		196	250	47	INCL	(E2)		OPP	77	
		S (150)		213	225	43	INCL	(E2)		OPP	77	
		T (163)		231	210	40	INCL	(E2)		OPP	77	

4 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	95X10D	105%		116	382	78				ENG		
	95X13D	130%		144	293	78				ENG		
	95X15D	150%		166	254	78				ENG		

E2 - Eaton Transmission Division has established a Maximum Torque Limit on the Transmission PTO driver gear.
The total combined PTO capacity is 610 lb.ft (827 Nm) of torque and 160 HP.
The PTO prep package must be factory installed before installing the PTO.

E3: Do not exceed maximum torque and power shown in output 2 when both outputs are working simultaneously.

Eaton Fuller Index

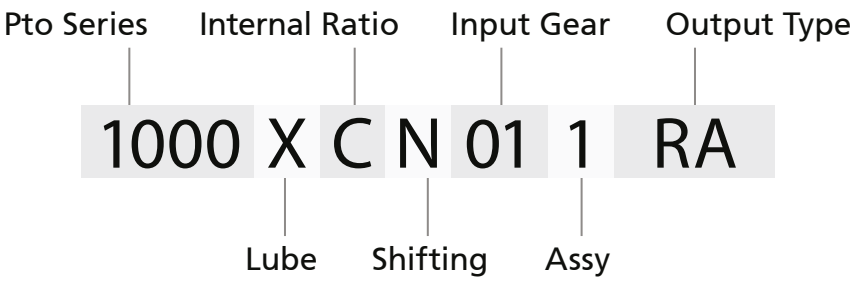
Transmission Model	Pag.
4106 DT A (Rear opening)	120
4106 DT B (Rear opening)	120
4106 OD	121
AT-1202	214
EH-6E606A-CD	168
EH-8E306A-CD/T/U/UP/UPG	168
ESO-9306A F-5405B-DM3	168
ET-16109	226
ET-16110	226
ET-16113	227
ET-18109	226
ET-18110	226
ET-18113	227
ET-20109	226
ET-20110	226
ET-20113	227
ETS-16409	226
ETS-16410	226
ETS-16413	227
ETS-18409	226
ETS-18410	226
ETS-18413	227
ETS-20409	226
ETS-20410	226
ETS-20413	227
F-5405-DM3	144
F-5406B-DM3	228
F-5505B-DM3	168
F-6405B-DM3	168
F-6406N-ASW	144
F-6406N-ASX	144
F-6406N-AW3	144
F-8405B-DM3	168
F-8406N-ASW	144
F-8406N-AW3	144
FAM-14810B	173
FAM-15810B	173
FAO-11810C	189
FAO-12810C	189
FAO-13810C	189
FAO-14810C	189
FAO-15810C	189

Transmission Model	Pag.
FAO-16810C	189
FAOM-14810C	189
FAOM-15810C	189
F-LO-15410C-T2	164
FM-14D310B-LST	170
FM-14E310B-LAS	170
FM-15D310B-LST	170
FM-15E310B-LAS	170
FO-6E318B-MXP	183
FO-10E310C-VAS	183
FO-12E310C-VAS	183
FO-14E308LL-VCS	217
FO-14E309ALL-VMS	183
FO-14E310C-LAS/VAS	183
FO-14E313A-MHP	183
FO-14E318B-MXP/VXP	183
FO-16E308LL-VCS	217
FO-16E309ALL-VMS	183
FO-16E310C-LAS/VAS	183
FO-16E313A-MHP	183
FO-16E313B-MHP	183
FO-16E318B-MXP/VXP	183
FO-18E310C-LAS	183
FO-18E313A-MHP	183
FO-18E318B-MXP/VXP	183
FO-20E313A-MHP	183
FO-20E318B-MXP/VXP	183
FO-22E318B-MXP/VXP	183
FO-5406B-DM3	228
FO-5506B-DM3	168
FO-6406A-ASW	228
FO-6406A-ASX/AW3	224
FO-6406B-DM3	168
FO-6406N-AW3	144
FO-6506B-DM3	168
FO-8406A-ASW	228
FO-8406A-ASX/AW3	224
FO-8406B-DM3	168
FOM-14E310C-LAS/VAS	183
FOM-15E310C-LAS/VAS	183
FOM-16E310C-LAS/VAS	183
FR-9210	165

Transmission Model	Pag.
FR-9210B	165
FR-11210B	165
FR-12210B	165
FR-13210B	165
FR-14210B	165
FR-15210B	165
FRLO-14410C/C-T2	164
FRLO-15410C	164
FRLO-16410C/C-T2	164
FRLO-18410C-T2	164
FRO-9210B	207
FRO-11210B	207
FRO-11210C	201
FRO-12210B	207
FRO-12210C	201
FRO-13210B	207
FRO-13210C	201
FRO-14210B	207
FRO-14210C	201
FRO-15210B	207
FRO-15210C	201
FRO-16210B	207
FRO-16210C	201
FRO-17210C	201
FRO-18210C	201
FRW-15210B	165
FS-3005A (1988 & Before)	124
FS-3005A (1989 & After)	125
FS-3005B (1988 & Before)	141
FS-3005B (1989 & After)	142
FS-3005C	143
FS-3205A	125
FS-3205B	142
FS-3205C	143
FS-4005A (11/87 & After)	125
FS-4005A (Before 11/87)	124
FS-4005B (11/87 & After)	142
FS-4005B (Before 11/87)	141
FS-4005C	143
FS-4205A	125
FS-4205B	142
FS-4205C	143

Transmission Model	Pag.
FS-5005A	126
FS-5005B	148
FS-5005C	149
FS-5005D	126
FS-5106A	140
FS-5205A	126
FS-5205B	148
FS-5205C	149
FS-5206A (Rear opening)	120
FS-5206B (Rear opening)	120
FS-5306A/X	140
FS-5406A	140
FS-5406N	144
FS-5506	122
FS-6005A	129
FS-6005B	130
FS-6105A	129
FS-6105B	130
FS-6106/A	122
FS-6205A	129
FS-6205B	130
FS-6206A	140
FS-6305A	129
FS-6305B	130
FS-6306A/B	140
FS-6306X	140
FS-6406A/B	140
FS-6406N	144
FS-6406N-ASW	144
FS-6406N-ASX	144
FS-6406N-AW3	144
FS-7206A	122
FS-8206A	122
FSB-5305D	127
FSB-5406B	140
FSB-6406B	140
FSBO-6406B	168
FSBO-8406B	168
FSM-5005E	128
FSM-5005H	150
FSM-5005J	151
FSM-5305E	128

EXAMPLE:



Eaton Fuller Index

Transmission Model	Pag.
FSM-5305H	150
FSO-5206B	121
FSO-6406A	168
FSO-8406A	168
FTS-16108LL	226
FTS-16109A	226
FTS-16112L	227
FTS-18108LL	226
FTS-18109A	226
FTS-18112L	227
FTS-20108LL	226
FTS-20109A	226
FTS-20112L	227
RT-610	182
RT-613	182
RT-906	173
RT-909A	173
RT-910	173
RT-915	173
RT-1110	173
RT-6609A	179
RT-6610	182
RT-6613	182
RT-7608LL	179
RT-7609	182
RT-8606L	152
RT-8608L	152
RT-8609	179
RT-8709B	173
RT-8908LL	173
RT-9109A-AT	176
RT-9508	152
RT-9509A/C	173
RT-9513	173
RT-9710B	173
RT-11109A-AT	176
RT-11209H	165
RT-11210B	165
RT-11509	173
RT-11608	152
RT-11609A/H	173
RT-11610	173
RT-11613	173
RT-11615	173
RT-11709H	173
RT-11710B	173
RT-11715	173
RT-12109A-AT	176
RT-12209H	165
RT-12210B	165
RT-12509	173
RT-12510	173
RT-12513	173
RT-12515	173
RT-12609A/H	173
RT-12610	173
RT-12709A/H	173
RT-12710B/B-AS2	173
RT-13209H	165
RT-13210B	165
RT-13609A/H	173
RT-13709H	173
RT-13710B	173
RT-14109A-AT	176
RT-14209H	165
RT-14210B	165
RT-14608	152
RT-14609A/H	173
RT-14610	173
RT-14613	173
RT-14615	173
RT-14709A/H	173
RT-14710B/B-AS2	173
RT-14715	173
RT-14910B-AS2	173
RT-14915	173
RT-15613	173
RT-15615	173
RT-15715	173
RTA-14710B-AS	173
RTAO-10710B-AC/AS	220
RTAO-10710C-AC/AS	186
RTAO-12710B-AC/AS	220
RTAO-12710C-AC/AS	186
RTAO-14710B-AC/AS	220
RTAO-14710C-AC/AS	186
RTAO-16710B-AC/AS	220
RTAO-16710C-AC/AS	186
RTF-906	173
RTF-906A	173
RTF-909A	173
RTF-910	173
RTF-915	173
RTF-8908LL	173
RTF-9509A	173
RTF-9513	173
RTF-11609A	173
RTF-11613	173
RTF-12509	173
RTF-12510	173
RTF-12515	173
RTF-12609A	173
RTF-12709H	173
RTF-12710B	173
RTF-13609A	173
RTF-13709H	173
RTF-13710B	173
RTF-14609A	173
RTF-14613	173
RTF-14709H	173
RTF-14710B	173
RTF-14715	173
RTF-14915	173
RTF-15715	173
RTL-11710B/B-T2	173
RTL-12710B/B-T2	173
RTL-13710B	173
RTL-13710B-T2	173
RTL-14710B/B-T2	173
RTLC-16609A/E	186
RTLC-16613A/E	186
RTLO-9118A-MT	173
RTLO-11610B/B-T2	173
RTLO-12610B/B-T2	173
RTLO-12613B	173
RTLO-12713A	186
RTLO-12913A	186
RTLO-13118AMT	186
RTLO-13610B/ B-AS/B-T2	173
RTLO-14610A/B/B-T2	173
RTLO-14613A/B	173
RTLO-14618A	173
RTLO-14713A/A-T2	186
RTLO-14718B/B-T2	186
RTLO-14913A/A-T2	186
RTLO-14918A-AS2/S3	186
RTLO-14918B/B-AS/ B-AS3/B-T2	186
RTLO-15610B/B-T2	173
RTLO-16610B/B-T2	173
RTLO-16618A	173
RTLO-16713A/A-MT/ A-T2	186
RTLO-16718B/B-T2	186
RTLO-16913L-DM3	183
RTLO-16913-LHS-D	186
RTLO-16913-T2/A/A-T2/L-LHP	186
RTLO-16918A-AS2/-AS3	186
RTLO-16918B/B-AS/B-T2	186
RTLO-17610B/B-T2	173
RTLO-18610B/B-T2	173
RTLO-18718B/B-T2	186
RTLO-18913A/A-T2	186
RTLO-18918A-AS2/-AS3	186
RTLO-18918B/B-AS/B-T2	186
RTLO-20718B/B-T2	186
RTLO-20913A/A-AS2	186
RTLO-20918A-AS3	186
RTLO-20918B/B-AS/B-T2	186
RTLO-22918A/A-AS2/A-AS3	186
RTLO-22918B/B-AS	186
RTLOC-16909A/A-T2	186
RTLOC-18909A/A-T2	186
RTLOF-14618A	174
RTLOF-14618A	175
RTLOF-14718B	186
RTLOF-14918B	186
RTLOF-16618A	174
RTLOF-16618A	175
RTLOF-16718B	186
RTLOF-16918B	186
RTLOF-18718B,	186
RTLOF-18918B	186
RTLOF-20918B	186
RTLOF-22918B	186
RTLOFC-16909A/A-T2	186
RTLOM-16913L-DM3	183
RTLOM-16913L-LH	186
RTO-610	213
RTO-613	213
RTO-909A	220
RTO-909B	186
RTO-910	204
RTO-913	173
RTO-915	204
RTO-958LL	220
RTO-1110	210
RTO-1157DL/DLL	195
RTO-1213	173
RTO-1258LL	220
RTO-6610	213
RTO-6613	213
RTO-7613	213
RTO-9109A-AT	222
RTO-9109B-AT	192
RTO-9509A	220
RTO-9509B	186
RTO-9513	173
RTO-10710B-AS/AS2	220
RTO-10910B-AS2/AS3	220
RTO-10910B-DM2/DM3	217
RTO-11109A-AT	222
RTO-11109B-AT	192
RTO-11209B/H	207
RTO-11210B	207
RTO-11210C	201
RTO-11210R	201
RTO-11509	220
RTO-11607L/LL	198
RTO-11608LL	220
RTO-11609A	220
RTO-11609B/H	186
RTO-11609P/R	215
RTO-11610	210
RTO-11613	173
RTO-11615	210
RTO-11707DLL	198
RTO-11707LL	198
RTO-11708LL	220
RTO-11709B/H/MLL	186
RTO-11710B	220
RTO-11710C	186
RTO-11715	210
RTO-11813	173
RTO-11908LL	220
RTO-11909ALL/MLL	186
RTO-12109A-AT	222
RTO-12109B-AT	192
RTO-12209B/H	207
RTO-12210B	207
RTO-12210C	201
RTO-12210R	201
RTO-12509	220
RTO-12510	210
RTO-12513	173
RTO-12515	210
RTO-12609A	220
RTO-12609B/H	186
RTO-12609P/R	215
RTO-12610	210
RTO-12709H	186
RTO-12710B/B-AS2	220
RTO-12710C	186
RTO-12910B-AS2/AS3	220
RTO-12910B-DM2/DM3	217
RTO-13109A-AT	222
RTO-13109B-AT	192
RTO-13209B/H	207
RTO-13210B	207
RTO-13210C	201
RTO-13210R	201
RTO-13609A	220
RTO-13609B/H	186
RTO-13609P/R	215
RTO-13707DLL/MLL	198
RTO-13709H	186
RTO-13710B	220
RTO-13710C	186
RTO-14109A-AT	222
RTO-14109B-AT	192
RTO-14209B/H	207
RTO-14210B	207
RTO-14210C	201
RTO-14210R	201
RTO-14608LL	220
RTO-14609A	220
RTO-14609B/H	186
RTO-14609P/R	215
RTO-14610	210

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com


bezaresusa

Transmission Model	Pag.
RTO-14610C	186
RTO-14613	173
RTO-14615	210
RTO-14708LL	220
RTO-14709A	220
RTO-14709H/MLL	186
RTO-14710B/B-AS2	220
RTO-14710C/C-AS2	186
RTO-14713	173
RTO-14715	210
RTO-14813	173
RTO-14908LL	220
RTO-14909ALL/MLL	186
RTO-14910B/B-AS2/B-AS3	220
RTO-14910B-DM2/DM3	217
RTO-14910C/C-AS2/C-AS3	186
RTO-14915	210
RTO-15210B	207
RTO-15210C	201
RTO-15613	173
RTO-15615	210
RTO-15618	173
RTO-15708LL	220
RTO-15710B	220
RTO-15710C	186
RTO-15715	210
RTO-15813	173
RTO-16109A-AT	222
RTO-16109B-AT	192
RTO-16210B	207
RTO-16210C	201
RTO-16709B/H	186
RTO-16710B/B-AS2	220
RTO-16710C&C-AS2	186
RTO-16715	210
RTO-16908LL	220
RTO-16909ALL	186
RTO-16910B/B-AS/B-AS2/B-AS3	220
RTO-16910B-DM2/DM3	217
RTO-16910C-AS2/C-AS3	186
RTO-16915	210
RTO-18910B-AS2/AS3	220
RTOC-16709A	186
RTOC-16909A	186
RTOC-16913A	186
RTOC-18909A	186
RTOCM-16909A	186
RTOF-909A	220
RTOF-910	204
RTOF-915	204
RTOF-9509A	220
RTOF-9509B	186
RTOF-9513	173
RTOM-16910B-DM3	217
RTOO-9513	186
RTOO-11613	186
RTOO-14613	186
RTOX-11609A	220
RTS-11909A	226
RTS-11912L	227
RTX-11609A	220
RTX-11609B	186
RTX-11609P/R	215
RTX-11708LL	220
RTX-11709H	186
RTX-11710B	220

Transmission Model	Pag.
RTX-11710C	186
RTX-12609B	186
RTX-12609P/R	215
RTX-12709H	186
RTX-12710B	220
RTX-12710C	186
RTX-13609B	186
RTX-13609P/R	215
RTX-13709H	186
RTX-13710B	220
RTX-13710C	186
RTX-14609A	220
RTX-14609B	186
RTX-14609P/R	215
RTX-14708LL	220
RTX-14709H	186
RTX-14710B	220
RTX-14710C	186
RTX-14715	210
RTX-15710B	220
RTX-15710C	186
RTX-15715	210
RTX-16709B/H	186
RTX-16710B	220
RTX-16710C	186
T-905A/B/H/P	145
T-905C/J	137
T-905D/M	158
T-905F	130
T-955AL/ALL	145
T-955GL	173
T-8607A/B	133
T-11605A/B	145
T-11605C	137
T-11605D/M	158
T-11605F	130
T-11606	133
T-11607A/B	133
T-14607A/B	135
TO-905A/D	195
TO-905B	161
TO-905C	155
TO-955AL/ALL/DLL	195
TO-955LL	220
TO-11605A	198
TO-11605B	161
TO-11605C	155
TO-11605D	195
TO-11607B-ASX	169
TO-14607B-ASX	169
TS-11612A	133
TS-12612A	133
TS-13612A	133
TS-15612A	133
TS-16612A	133
TSO-11612A	133
TSO-12612A	133
TSO-13612A	133
TSO-15612A	133
TSO-16612A	133
TX-8607B	169
TX-14607B	169


Eaton Fuller

4106 DT A (Rear opening) **FS-5206A (Rear opening)** **FUL.01**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1213003		135%		31	310	59	INCL			ENG		

4 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1213403		100%		43	444	84	INCL			OPP		
129703		130%		56	360	68	INCL	HEAVY DUTY		ENG		
123503		132%		57	310	59	INCL			ENG		
1219203		180%		78	361	68	INCL	HEAVY DUTY		ENG		

4106 DT B (Rear opening) **FS-5206B (Rear opening)** **FUL.02**


6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1213003		135%		37	310	59	INCL			ENG		

4 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1213403		100%		52	444	84	INCL			OPP		
129703		130%		67	360	68	INCL	HEAVY DUTY		ENG		
123503		132%		68	310	59	INCL			ENG		
1219203		180%		93	361	68	INCL	HEAVY DUTY		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

4106 OD **FSO-5206B** **FUL.03**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1213003		135%		45	310	59	INCL			ENG		

4 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1213403		100%		64	444	84	INCL			OPP		
129703		130%		84	360	68	INCL	HEAVY DUTY		ENG		
123503		132%		85	310	59	INCL			ENG		
1219203		180%		116	361	68	INCL	HEAVY DUTY		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller



FS-5506 **FS-6106/A** **FS-7206A** **FS-8206A** **FUL.05**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		45	250	47	INCL			OPP	25	
		C (73)		59	250	47	INCL			OPP	25	
		E (86)		71	225	43	INCL			OPP	25	
		J (95)		77	225	43	INCL			OPP	25	3L
		O (125)		102	195	37	INCL			OPP	25	
		R (137)		111	180	34	INCL			OPP	25	
		S (150)		122	162	31	INCL			OPP	25	
		T (165)		134	148	28	INCL			OPP	25	
	3200	Z (40)		33	250	47	INCL	CLUTCH SHIFT		OPP	25	
		A (50)		41	250	47	INCL	CLUTCH SHIFT		OPP	25	
		B (55)		45	250	47	INCL	CLUTCH SHIFT		OPP	25	
		C (73)		59	250	47	INCL	CLUTCH SHIFT		OPP	25	
		E (86)		71	225	43	INCL	CLUTCH SHIFT		OPP	25	3L
		J (95)		78	225	43	INCL	CLUTCH SHIFT		OPP	25	
		O (125)		102	195	37	INCL	CLUTCH SHIFT		OPP	25	
		R (137)		111	180	34	INCL	CLUTCH SHIFT		OPP	25	
		S (150)		122	162	31	INCL	CLUTCH SHIFT		OPP	25	
		T (165)		134	148	28	INCL	CLUTCH SHIFT		OPP	25	
	6000	Forward (73)		59	150	28	INCL			BOTH	25	3L
		Reverse (83)		67	150	28	INCL			BOTH	25	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com



FS-5506 **FS-6106/A** **FS-7206A** **FS-8206A** **FUL.05**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250	47	INCL			OPP	25	
		B (55)		45	250	47	INCL			OPP	25	
		C (73)		59	250	47	INCL			OPP	25	
		E (86)		71	225	43	INCL			OPP	25	
		J (95)		77	225	43	INCL			OPP	25	
		O (125)		102	180	34	INCL			OPP	25	
		R (137)		111	170	32	INCL			OPP	25	
		S (150)		122	155	29	INCL			OPP	25	
		T (165)		134	140	27	INCL			OPP	25	
	3800	Z (40)		33	250	47	INCL	CLUTCH SHIFT		OPP	25	
		A (50)		41	250	47	INCL	CLUTCH SHIFT		OPP	25	
		B (55)		45	250	47	INCL	CLUTCH SHIFT		OPP	25	
		C (73)		59	250	47	INCL	CLUTCH SHIFT		OPP	25	
		E (86)		71	225	43	INCL	CLUTCH SHIFT		OPP	25	
		J (95)		78	225	43	INCL	CLUTCH SHIFT		OPP	25	
		O (125)		102	195	37	INCL	CLUTCH SHIFT		OPP	25	
		R (137)		111	180	34	INCL	CLUTCH SHIFT		OPP	25	
		S (150)		122	162	31	INCL	CLUTCH SHIFT		OPP	25	
		T (165)		134	148	28	INCL	CLUTCH SHIFT		OPP	25	
	8500	B (57)		39	500	95	INCL			OPP	25	
		C (70)		52	485	92	INCL			OPP	25	
		E (86)		62	400	76	INCL			OPP	25	
		J (105)		77	325	62	INCL			OPP	25	
		O (127)		89	270	51	INCL			OPP	25	
		R (137)		97	250	47	INCL			OPP	25	
		S (150)		107	225	43	INCL			OPP	25	
		T (165)		117	210	40	INCL			OPP	25	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FS-3005A (1988 & Before) **FS-4005A (Before 11/87)** **FUL.06**


6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		37	250	47	INCL	Before 11/87		OPP	23	
		C (73)		49	250	47	INCL	Before 11/87		OPP	23	
		E (86)		59	225	43	INCL	Before 11/87		OPP	23	
		J (95)		64	225	43	INCL	Before 11/87		OPP	23	
		O (125)		84	195	37	INCL	Before 11/87		OPP	23	
		R (137)		92	180	34	INCL	Before 11/87		OPP	23	
		S (150)		101	162	31	INCL	Before 11/87		OPP	23	
		T (165)		111	148	28	INCL	Before 11/87		OPP	23	
6000		Forward (73)		49	150	28	INCL	Before 11/87		BOTH	23	
		Reverse (83)		56	150	28	INCL	Before 11/87		BOTH	23	


For complete part numbers, consult the PTO Series section (page 25)


Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FS-3005A (1989 & After) **FS-3205A** **FS-4005A (11/87 & After)** **FS-4205A** **FUL.07**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		37	250	47	INCL	11/87 & After		OPP	18	
		C (73)		49	250	47	INCL	11/87 & After		OPP	18	
		E (86)		59	225	43	INCL	11/87 & After		OPP	18	
		J (95)		64	225	43	INCL	11/87 & After		OPP	18	
		O (125)		85	195	37	INCL	11/87 & After		OPP	18	
		R (137)		93	180	34	INCL	11/87 & After		OPP	18	
		S (150)		101	162	31	INCL	11/87 & After		OPP	18	
		T (165)		112	148	28	INCL	11/87 & After		OPP	18	
3200		Z (40)		27	250	47	INCL	11/87 & After		OPP	18	
		A (50)		34	250	47	INCL	11/87 & After		OPP	18	
		B (55)		37	250	47	INCL	11/87 & After		OPP	18	
		C (73)		49	250	47	INCL	11/87 & After		OPP	18	
		E (86)		59	225	43	INCL	11/87 & After		OPP	18	
		J (95)		65	225	43	INCL	11/87 & After		OPP	18	
		O (125)		85	195	37	INCL	11/87 & After		OPP	18	
		R (137)		93	180	34	INCL	11/87 & After		OPP	18	
		S (150)		101	162	31	INCL	11/87 & After		OPP	18	
		T (165)		111	148	28	INCL	11/87 & After		OPP	18	
6000		Forward (73)		49	150	28	INCL	11/87 & After		BOTH	18	
		Reverse (83)		56	150	28	INCL	11/87 & After		BOTH	18	












For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FS-5005A **FS-5005D** **FS-5205A** **FUL.08**


6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		21	250	47	INCL			ENG	06	
		C (73)		27	250	47	INCL			ENG	06	
		E (86)		33	225	43	INCL			ENG	06	
		J (95)		36	225	43	INCL			ENG	06	
		O (125)		47	195	37	INCL			ENG	06	
		R (137)		51	180	34	INCL			ENG	06	
		S (150)		56	162	31	INCL			ENG	06	
		T (165)		62	148	28	INCL			ENG	06	
	1000	B (55)		38	250	47	S3		GA6093	OPP	30	
		C (73)		50	250	47	S3		GA6093	OPP	30	
		E (86)		60	225	43	S3		GA6093	OPP	30	
		J (95)		66	225	43	S3		GA6093	OPP	30	
		O (125)		86	195	37	S3		GA6093	OPP	30	
		R (137)		95	180	34	S3		GA6093	OPP	30	
		S (150)		104	162	31	S3		GA6093	OPP	30	
		T (165)		114	148	28	S3		GA6093	OPP	30	
	3200	Z (40)		16	250	47	S3		GA6093	OPP	30	
		A (50)		20	250	47	S3		GA6093	OPP	30	
		B (55)		22	250	47	S3		GA6093	OPP	30	
		C (73)		29	250	47	S3		GA6093	OPP	30	
		E (86)		35	225	43	S3		GA6093	OPP	30	
		J (95)		38	225	43	S3		GA6093	OPP	30	
		O (125)		50	195	37	S3		GA6093	OPP	30	
		R (137)		54	180	34	S3		GA6093	OPP	30	
		S (150)		60	162	31	S3		GA6093	OPP	30	
		T (165)		65	148	28	S3		GA6093	OPP	30	
	6000	Forward (83)		27	150	28	INCL			BOTH	06	
		Reverse (73)		31	150	28	INCL			BOTH	06	
	6000	Forward (83)		50	150	28	S3		GA6093	BOTH	30	
		Reverse (73)		57	150	28	S3		GA6093	BOTH	30	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FSB-5305D

FUL.09

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		21	250	47	INCL			ENG	6	
		C (73)		27	250	47	INCL			ENG	6	
		E (86)		33	225	43	INCL			ENG	6	
		J (95)		36	225	43	INCL			ENG	6	
		O (125)		47	195	37	INCL			ENG	6	
		R (137)		51	180	34	INCL			ENG	6	
		S (150)		56	162	31	INCL			ENG	6	
		T (165)		62	148	28	INCL			ENG	6	

°FOOT NOTES:

Mounting at right side + GA6062 Adapter is not available.
(Input gear #29 not cut)

For complete part numbers, consult the PTO Series section (page 25)


Eaton Fuller


FSM-5005E **FSM-5305E**

FUL.10

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		38	250	47	INCL		GA6062	OPP	30	
		C (73)		50	250	47	INCL		GA6062	OPP	30	
		E (86)		60	225	43	INCL		GA6062	OPP	30	
		J (95)		66	225	43	INCL		GA6062	OPP	30	
		O (125)		86	195	37	INCL		GA6062	OPP	30	
		R (137)		95	180	34	INCL		GA6062	OPP	30	
		S (150)		104	162	31	INCL		GA6062	OPP	30	
		T (165)		114	148	28	INCL		GA6062	OPP	30	
	3200	Z (40)		28	250	47	INCL		GA6062	OPP	30	
		A (50)		35	250	47	INCL		GA6062	OPP	30	
		B (55)		38	250	47	INCL		GA6062	OPP	30	
		C (73)		50	250	47	INCL		GA6062	OPP	30	
		E (86)		60	225	43	INCL		GA6062	OPP	30	
		J (95)		66	225	43	INCL		GA6062	OPP	30	
		O (125)		86	195	37	INCL		GA6062	OPP	30	
		R (137)		94	180	34	INCL		GA6062	OPP	30	
		S (150)		104	162	31	INCL		GA6062	OPP	30	
		T (165)		114	148	28	INCL		GA6062	OPP	30	
	6000	Forward (83)		50	150	28	INCL		GA6062	BOTH	30	
		Reverse (73)		57	150	28	INCL		GA6062	BOTH	30	









For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FS-6005A **FS-6105A** **FS-6205A** **FS-6305A** **FUL.12**

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		47	250	47	S3	(F15,16)	6240S	OPP	17	
		C (73)		62	250	47	S3	(F15,16)	6240S	OPP	17	
		E (86)		74	225	43	S3	(F15,16)	6240S	OPP	17	
		J (95)			225	43	S3	(F15,16)	6240S	OPP	17	
		O (125)			195	37	S3	(F15,16)	6240S	OPP	17	
		R (137)			180	34	S3	(F15,16)	6240S	OPP	17	
		S (150)			162	31	S3	(F15,16)	6240S	OPP	17	
		T (165)			148	28	S3	(F15,16)	6240S	OPP	17	
3200		Z (40)		34	250	47	S3	(F15,16)	6240S	OPP	17	
		A (50)		42	250	47	S3	(F15,16)	6240S	OPP	17	
		B (55)		47	250	47	S3	(F15,16)	6240S	OPP	17	
		C (73)		62	250	47	S3	(F15,16)	6240S	OPP	17	
		E (86)		74	225	43	S3	(F15,16)	6240S	OPP	17	
		J (95)			225	43	S3	(F15,16)	6240S	OPP	17	
		O (125)			195	37	S3	(F15,16)	6240S	OPP	17	
		R (137)			180	34	S3	(F15,16)	6240S	OPP	17	
		S (150)			162	31	S3	(F15,16)	6240S	OPP	17	
		T (165)			148	28	S3	(F15,16)	6240S	OPP	17	

FOOT NOTES:

F15: Partial tooth engagement because transmission's PTO driver gear is not located .5" from centerline. Reduce available torque by 10%.


F16: 1000/3200 Series PTOs: Not available ratios above "E"because interfere with the adjacent gear in the transmission.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller




FS-6005B **FS-6105B** **FS-6205B** **FS-6305B**

FUL.13

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1500		O (125)		129	195	37	INCL			OPP	26	

T-11605F **T-905F**

FUL.15

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		57	250	47	INCL	(F6,7)		OPP	01	
		C (73)		76	250	47	INCL	(F6,7)		OPP	01	
		E (86)		90	225	43	INCL	(F6,7)		OPP	01	
		J (95)		99	225	43	INCL	(F6,7)		OPP	01	
		O (125)		130	195	37	INCL	(F6,7)		OPP	01	
		R (137)		142	180	34	INCL	(F6,7)		OPP	01	
		S (150)		156	162	31	INCL	(F6,7)		OPP	01	
		T (165)		171	148	28	INCL	(F6,7)		OPP	01	
3200		Z (40)		42	250	47	INCL	(F6,7)		OPP	01	
		A (50)		52	250	47	INCL	(F6,7)		OPP	01	
		B (55)		57	250	47	INCL	(F6,7)		OPP	01	
		C (73)		76	250	47	INCL	(F6,7)		OPP	01	
		E (86)		91	225	43	INCL	(F6,7)		OPP	01	
		J (95)		99	225	43	INCL	(F6,7)		OPP	01	
		O (125)		130	195	37	INCL	(F6,7)		OPP	01	
		R (137)		142	180	34	INCL	(F6,7)		OPP	01	
		S (150)		156	162	31	INCL	(F6,7)		OPP	01	
		T (165)		171	148	28	INCL	(F6,7)		OPP	01	
6000		Forward (73)		76	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		86	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-11605F **T-905F**

FUL.15

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		51	250	47	INCL			OPP	O1	 ↑ 1B
		B (55)		60	250	47	INCL			OPP	O1	
		C (73)		79	250	47	INCL			OPP	O1	
		E (86)		94	225	43	INCL			OPP	O1	
		J (95)		103	225	43	INCL			OPP	O1	
		O (125)		136	180	34	INCL			OPP	O1	
		R (137)		149	170	32	INCL			OPP	O1	
		S (150)		163	155	29	INCL			OPP	O1	
		T (165)		179	140	27	INCL			OPP	O1	
	3800	Z (40)		43	250	47	INCL	CLUTCH SHIFT		OPP	O1	 ↑ 1B
		A (50)		54	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		B (55)		60	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		C (73)		79	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		E (86)		95	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		J (95)		104	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		O (125)		136	195	37	INCL	CLUTCH SHIFT		OPP	O1	
		R (137)		149	180	34	INCL	CLUTCH SHIFT		OPP	O1	
		S (150)		163	162	31	INCL	CLUTCH SHIFT		OPP	O1	
		T (165)		179	148	28	INCL	CLUTCH SHIFT		OPP	O1	
	4100	B (57)		59	420	80	INCL			OPP	O1	 ↑ 1B
		C (70)		73	350	66	INCL			OPP	O1	
		E (86)		89	285	54	INCL			OPP	O1	
		J (105)		109	235	44	INCL			OPP	O1	
	4250	Output 1 C (96)		72	355	67	INCL	(F25)		OPP	O1	 ↑ 1B
		Output 2 B (89)		67	380	72	INCL	(F25)		OPP	O1	
		Output 1 E (112)		84	300	57	INCL	(F25)		OPP	O1	
		Output 2 C (104)		77	325	62	INCL	(F25)		OPP	O1	
		Output 1 J (132)		98	260	49	INCL	(F25)		OPP	O1	
		Output 2 E (121)		90	280	53	INCL	(F25)		OPP	O1	
		Output 1 O (168)		126	200	38	INCL	(F25)		OPP	O1	
		Output 2 J (152)		114	220	42	INCL	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

T-11605F **T-905F**

FUL.15

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		57	150	28	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		54	150	28	INCL			BOTH	O1	
	8000	Forward (40)		45	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		53	500	95	INCL			BOTH	O1	
	8500	B (57)		41	500	95	INCL			OPP	O1	
		C (70)		54	485	92	INCL			OPP	O1	
		E (86)		65	400	76	INCL			OPP	O1	 ↑ 1B
		J (105)		81	325	62	INCL			OPP	O1	
		O (127)		93	270	51	INCL			OPP	O1	
		R (137)		102	250	47	INCL			OPP	O1	
		S (150)		112	225	43	INCL			OPP	O1	
		T (165)		123	210	40	INCL			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing. The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-11606
T-11607A/B
T-8607A/B


TS-11612A
TS-12612A
TS-13612A

TS-15612A
TS-16612A
TSO-11612A

TSO-12612A
TSO-13612A
TSO-15612A

TSO-16612A

FUL.16

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		56	250	47	INCL	(F20)	6140S	OPP	14	
		C (73)		75	250	47	INCL	(F20)	6140S	OPP	14	
		E (86)		89	225	43	INCL	(F20)	6140S	OPP	14	
		J (95)		97	225	43	INCL	(F20)	6140S	OPP	14	
		O (125)		128	195	37	INCL	(F20)	6140S	OPP	14	
		R (137)		140	180	34	INCL	(F20)	6140S	OPP	14	
		S (150)		154	162	31	INCL	(F20)	6140S	OPP	14	
		T (165)		169	148	28	INCL	(F20)	6140S	OPP	14	
	3200	Z (40)		41	250	47	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		A (50)		51	250	47	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		B (55)		56	250	47	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		C (73)		75	250	47	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		E (86)		90	225	43	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		J (95)		98	225	43	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		O (125)		128	195	37	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		R (137)		140	180	34	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		S (150)		154	162	31	INCL	CLUTCH SHIFT	AD68248	OPP	14	
		T (165)		169	148	28	INCL	CLUTCH SHIFT	AD68248	OPP	14	
	6000	Forward (73)		75	150	28	INCL		6140S	BOTH	14	
		Reverse (83)		85	150	28	INCL		6140S	BOTH	14	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

T-11606
T-11607A/B
T-8607A/B

TS-11612A
TS-12612A
TS-13612A

TS-15612A
TS-16612A
TSO-11612A

TSO-12612A
TSO-13612A
TSO-15612A

TSO-16612A

FUL.16

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250	47	INCL			OPP	14	 ↑ 1B
		B (55)		56	250	47	INCL			OPP	14	
		C (73)		75	250	47	INCL			OPP	14	
		E (86)		89	225	43	INCL			OPP	14	
		J (95)		97	225	43	INCL			OPP	14	
		O (125)		128	180	34	INCL			OPP	14	
		R (137)		140	170	32	INCL			OPP	14	
		S (150)		154	155	29	INCL			OPP	14	
		T (165)		169	140	27	INCL			OPP	14	
	3800	Z (40)		41	250	47	INCL	CLUTCH SHIFT		OPP	14	 ↑ 1B
		A (50)		51	250	47	INCL	CLUTCH SHIFT		OPP	14	
		B (55)		56	250	47	INCL	CLUTCH SHIFT		OPP	14	
		C (73)		75	250	47	INCL	CLUTCH SHIFT		OPP	14	
		E (86)		90	225	43	INCL	CLUTCH SHIFT		OPP	14	
		J (95)		98	225	43	INCL	CLUTCH SHIFT		OPP	14	
		O (125)		128	195	37	INCL	CLUTCH SHIFT		OPP	14	
		R (137)		140	180	34	INCL	CLUTCH SHIFT		OPP	14	
		S (150)		154	162	31	INCL	CLUTCH SHIFT		OPP	14	
		T (165)		169	148	28	INCL	CLUTCH SHIFT		OPP	14	
	8500	B (57)		69	500	95	INCL			OPP	14	 ↑ 1B
		C (70)		91	485	92	INCL			OPP	14	
		E (86)		109	400	76	INCL			OPP	14	
		J (105)		135	325	62	INCL			OPP	14	
		O (127)		156	270	51	INCL			OPP	14	
		R (137)		171	250	47	INCL			OPP	14	
		S (150)		187	225	43	INCL			OPP	14	
		T (165)		206	210	40	INCL			OPP	14	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:



F20: Direct mount pumps will not clear bulge on transmission. Use of adapter will not work.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-14607A/B

FUL.17

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		55	250	47	INCL	(F20)	6187S	OPP	27	
		C (73)		73	250	47	INCL	(F20)	6187S	OPP	27	
		E (86)		87	225	43	INCL	(F20)	6187S	OPP	27	
		J (95)		95	225	43	INCL	(F20)	6187S	OPP	27	
		O (125)		125	195	37	INCL	(F20)	6187S	OPP	27	
		R (137)		137	180	34	INCL	(F20)	6187S	OPP	27	
		S (150)		150	162	31	INCL	(F20)	6187S	OPP	27	
		T (165)		165	148	28	INCL	(F20)	6187S	OPP	27	
3200		Z (40)		40	250	47	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		A (50)		50	250	47	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		B (55)		55	250	47	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		C (73)		73	250	47	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		E (86)		87	225	43	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		J (95)		95	225	43	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		O (125)		125	195	37	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		R (137)		137	180	34	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		S (150)		150	162	31	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
		T (165)		164	148	28	INCL	(F20) CLUTCH SHIFT	6187S	OPP	27	
6000		Forward (73)		73	150	28	INCL		6187S	BOTH	27	
		Reverse (83)		83	150	28	INCL		6187S	BOTH	27	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

T-14607A/B

FUL.17

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250	47	INCL		GA8062	OPP	27	 ↑ 1B
		B (55)		55	250	47	INCL		GA8062	OPP	27	
		C (73)		73	250	47	INCL		GA8062	OPP	27	
		E (86)		87	225	43	INCL		GA8062	OPP	27	
		J (95)		95	225	43	INCL		GA8062	OPP	27	
		O (125)		125	180	34	INCL		GA8062	OPP	27	
		R (137)		137	170	32	INCL		GA8062	OPP	27	
		S (150)		150	155	29	INCL		GA8062	OPP	27	
		T (165)		165	140	27	INCL		GA8062	OPP	27	
	3800	Z (40)		40	250	47	INCL	CLUTCH SHIFT	GA8062	OPP	27	 ↑ 1B
		A (50)		50	250	47	INCL	CLUTCH SHIFT	GA8062	OPP	27	
		B (55)		55	250	47	INCL	CLUTCH SHIFT	GA8062	OPP	27	
		C (73)		73	250	47	INCL	CLUTCH SHIFT	GA8062	OPP	27	
		E (86)		87	225	43	INCL	CLUTCH SHIFT	GA8062	OPP	27	
		J (95)		95	225	43	INCL	CLUTCH SHIFT	GA8062	OPP	27	
		O (125)		125	195	37	INCL	CLUTCH SHIFT	GA8062	OPP	27	
		R (137)		137	180	34	INCL	CLUTCH SHIFT	GA8062	OPP	27	
		S (150)		150	162	31	INCL	CLUTCH SHIFT	GA8062	OPP	27	
		T (165)		164	148	28	INCL	CLUTCH SHIFT	GA8062	OPP	27	
	8500	B (57)		69	500	95	INCL			OPP	27	 ↑ 1B
		C (70)		91	485	92	INCL			OPP	27	
		E (86)		109	400	76	INCL			OPP	27	
		J (105)		135	325	62	INCL			OPP	27	
		O (127)		156	270	51	INCL			OPP	27	
		R (137)		171	250	47	INCL			OPP	27	
		S (150)		187	225	43	INCL			OPP	27	
		T (165)		206	210	40	INCL			OPP	27	

FOOT NOTES:

F20: Direct mount pumps will not clear bulge on transmission. Use of adapter will not work.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

T-11605C **T-905C/J**

FUL.18

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		58	250	47	INCL	(F6,7)		OPP	01	
		C (73)		77	250	47	INCL	(F6,7)		OPP	01	
		E (86)		91	225	43	INCL	(F6,7)		OPP	01	
		J (95)		100	225	43	INCL	(F6,7)		OPP	01	
		O (125)		131	195	37	INCL	(F6,7)		OPP	01	
		R (137)		144	180	34	INCL	(F6,7)		OPP	01	
		S (150)		157	162	31	INCL	(F6,7)		OPP	01	
		T (165)		173	148	28	INCL	(F6,7)		OPP	01	
3200		Z (40)		42	250	47	INCL	(F6,7)		OPP	01	
		A (50)		52	250	47	INCL	(F6,7)		OPP	01	
		B (55)		58	250	47	INCL	(F6,7)		OPP	01	
		C (73)		77	250	47	INCL	(F6,7)		OPP	01	
		E (86)		92	225	43	INCL	(F6,7)		OPP	01	
		J (95)		100	225	43	INCL	(F6,7)		OPP	01	
		O (125)		131	195	37	INCL	(F6,7)		OPP	01	
		R (137)		144	180	34	INCL	(F6,7)		OPP	01	
		S (150)		157	162	31	INCL	(F6,7)		OPP	01	
		T (165)		173	148	28	INCL	(F6,7)		OPP	01	
6000		Forward (73)		77	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		87	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

T-11605C **T-905C/J**

FUL.18

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		51	250	47	INCL			OPP	O1	 ↑ 1B
		B (55)		60	250	47	INCL			OPP	O1	
		C (73)		80	250	47	INCL			OPP	O1	
		E (86)		95	225	43	INCL			OPP	O1	
		J (95)		104	225	43	INCL			OPP	O1	
		O (125)		137	180	34	INCL			OPP	O1	
		R (137)		150	170	32	INCL			OPP	O1	
		S (150)		164	155	29	INCL			OPP	O1	
		T (165)		181	140	27	INCL			OPP	O1	
	3800	Z (40)		44	250	47	INCL	CLUTCH SHIFT		OPP	O1	 ↑ 1B
		A (50)		55	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		B (55)		60	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		C (73)		80	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		E (86)		96	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		J (95)		105	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		O (125)		137	195	37	INCL	CLUTCH SHIFT		OPP	O1	
		R (137)		150	180	34	INCL	CLUTCH SHIFT		OPP	O1	
		S (150)		164	162	31	INCL	CLUTCH SHIFT		OPP	O1	
		T (165)		181	148	28	INCL	CLUTCH SHIFT		OPP	O1	
	4100	B (57)		60	420	80	INCL			OPP	O1	 ↑ 1B
		C (70)		73	350	66	INCL			OPP	O1	
		E (86)		90	285	54	INCL			OPP	O1	
		J (105)		110	235	44	INCL			OPP	O1	
	4250	Output 1 C (96)		72	355	67	INCL	(F25)		OPP	O1	 ↑ 1B
		Output 2 B (89)		67	380	72	INCL	(F25)		OPP	O1	
		Output 1 E (112)		85	300	57	INCL	(F25)		OPP	O1	
		Output 2 C (104)		78	325	62	INCL	(F25)		OPP	O1	
		Output 1 J (132)		99	260	49	INCL	(F25)		OPP	O1	
		Output 2 E (121)		91	280	53	INCL	(F25)		OPP	O1	
		Output 1 O (168)		127	200	38	INCL	(F25)		OPP	O1	
		Output 2 J (152)		115	220	42	INCL	(F25)		OPP	O1	
	6800	Forward (55)		58	150	28	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		55	150	28	INCL			BOTH	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

T-11605C **T-905C/J**

FUL.18

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	8000	Forward (40)		45	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		54	500	95	INCL			BOTH	O1	
	8500	B (57)		41	500	95	INCL			OPP	O1	
		C (70)		55	485	92	INCL			OPP	O1	
		E (86)		66	400	76	INCL			OPP	O1	
		J (105)		81	325	62	INCL			OPP	O1	 ↑ 1B
		O (127)		94	270	51	INCL			OPP	O1	
		R (137)		103	250	47	INCL			OPP	O1	
		S (150)		113	225	43	INCL			OPP	O1	
		T (165)		124	210	40	INCL			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing. The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above **DO NOT exceed 350 ft-lbs of torque for any application.**

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FS-5106A
FS-5306A/X




FS-5406A
FS-6206A

FS-6306A/B
FS-6306X

FS-6406A/B
FSB-6406B

FSB-6406B

FUL.20



6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		50	250	47	INCL		GA6062	OPP	17	
		C (73)		66	250	47	INCL		GA6062	OPP	17	
		E (86)		78	225	43	INCL		GA6062	OPP	17	
		J (95)		86	225	43	INCL		GA6062	OPP	17	
		O (125)		113	195	37	INCL		GA6062	OPP	17	
		R (137)		124	180	34	INCL		GA6062	OPP	17	
		S (150)		135	162	31	INCL		GA6062	OPP	17	
		T (165)		149	148	28	INCL		GA6062	OPP	17	
3200		Z (40)		36	250	47	INCL		GA6062	OPP	17	
		A (50)		45	250	47	INCL		GA6062	OPP	17	
		B (55)		50	250	47	INCL		GA6062	OPP	17	
		C (73)		66	250	47	INCL		GA6062	OPP	17	
		E (86)		79	225	43	INCL		GA6062	OPP	17	
		J (95)		86	225	43	INCL		GA6062	OPP	17	
		O (125)		113	195	37	INCL		GA6062	OPP	17	
		R (137)		123	180	34	INCL		GA6062	OPP	17	
		S (150)		135	162	31	INCL		GA6062	OPP	17	
		T (165)		148	148	28	INCL		GA6062	OPP	17	
6000		Forward (73)		66	150	28	INCL		GA6062	BOTH	17	
		Reverse (83)		75	150	28	INCL		GA6062	BOTH	17	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FS-3005B (1988 & Before) **FS-4005B (Before 11/87)**



FUL.21

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		43	250	47	INCL	Before 11/87		OPP	23	
		C (73)		57	250	47	INCL	Before 11/87		OPP	23	
		E (86)		68	225	43	INCL	Before 11/87		OPP	23	
		J (95)		74	225	43	INCL	Before 11/87		OPP	23	
		O (125)		97	195	37	INCL	Before 11/87		OPP	23	
		R (137)		107	180	34	INCL	Before 11/87		OPP	23	
		S (150)		117	162	31	INCL	Before 11/87		OPP	23	
		T (165)		128	148	28	INCL	Before 11/87		OPP	23	
6000		Forward (73)		57	150	28	INCL	Before 11/87		BOTH	23	
		Reverse (83)		65	150	28	INCL	Before 11/87		BOTH	23	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FS-3005B (1989 & After) **FS-3205B** **FS-4005B (11/87 & After)** **FS-4205B** **FUL.22**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		43	250	47	INCL			OPP	18	
		C (73)		57	250	47	INCL			OPP	18	
		E (86)		68	225	43	INCL			OPP	18	
	1000	J (95)		74	225	43	INCL			OPP	18	
		O (125)		97	195	37	INCL			OPP	18	
		R (137)		107	180	34	INCL			OPP	18	
		S (150)		117	162	31	INCL			OPP	18	
		T (165)		129	148	28	INCL			OPP	18	
		Z (40)		31	250	47	INCL			OPP	18	
		A (50)		39	250	47	INCL			OPP	18	
		B (55)		43	250	47	INCL			OPP	18	
		C (73)		57	250	47	INCL			OPP	18	
	3200	E (86)		68	225	43	INCL			OPP	18	
		J (95)		75	225	43	INCL			OPP	18	
		O (125)		97	195	37	INCL			OPP	18	
		R (137)		107	180	34	INCL			OPP	18	
		S (150)		117	162	31	INCL			OPP	18	
		T (165)		128	148	28	INCL			OPP	18	
	6000	Forward (73)		57	150	28	INCL			BOTH	18	
		Reverse (83)		65	150	28	INCL			BOTH	18	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FS-3005C **FS-3205C** **FS-4005C** **FS-4205C** **FUL.23**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		44	250	47	S3		GA6093	OPP	15	
		C (73)		59	250	47	S3		GA6093	OPP	15	
		E (86)		70	225	43	S3		GA6093	OPP	15	
		J (95)		77	225	43	S3		GA6093	OPP	15	3L 1R
		O (125)		101	195	37	S3		GA6093	OPP	15	
		R (137)		111	180	34	S3		GA6093	OPP	15	
		S (150)		121	162	31	S3		GA6093	OPP	15	
		T (165)		133	148	28	S3		GA6093	OPP	15	
3200		Z (40)		32	250	47	S3		GA6093	OPP	15	
		A (50)		40	250	47	S3		GA6093	OPP	15	
		B (55)		44	250	47	S3		GA6093	OPP	15	
		C (73)		59	250	47	S3		GA6093	OPP	15	
		E (86)		71	225	43	S3		GA6093	OPP	15	3L 1R
		J (95)		77	225	43	S3		GA6093	OPP	15	
		O (125)		101	195	37	S3		GA6093	OPP	15	
		R (137)		110	180	34	S3		GA6093	OPP	15	
		S (150)		121	162	31	S3		GA6093	OPP	15	
		T (165)		133	148	28	S3		GA6093	OPP	15	
6000		Forward (73)		59	150	28	S3		GA6093	BOTH	15	3L 1R
		Reverse (83)		67	150	28	S3		GA6093	BOTH	15	

For complete part numbers, consult the PTO Series section (page 25)


Eaton Fuller

F-5405-DM3
F-6406N-ASW
F-6406N-ASX
F-6406N-AW3
F-8406N-ASW
F-8406N-AW3
FO-6406N-AW3
FS-5406N
FS-6406N
FS-6406N-ASW
FS-6406N-ASX
FS-6406N-AW3

FUL.24

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		49	250	47	INCL			OPP	42	
		C (73)		66	250	47	INCL			OPP	42	
		E (86)		78	225	43	INCL			OPP	42	
		J (95)		85	225	43	INCL			OPP	42	
		O (125)		112	195	37	INCL			OPP	42	
		R (137)		123	180	34	INCL			OPP	42	
		S (150)		135	162	31	INCL			OPP	42	
		T (165)		148	148	28	INCL			OPP	42	
	3200	Z (40)		36	250	47	INCL			OPP	42	
		A (50)		45	250	47	INCL			OPP	42	
		B (55)		49	250	47	INCL			OPP	42	
		C (73)		66	250	47	INCL			OPP	42	
		E (86)		79	225	43	INCL			OPP	42	
		J (95)		86	225	43	INCL			OPP	42	
		O (125)		112	195	37	INCL			OPP	42	
		R (137)		123	180	34	INCL			OPP	42	
		S (150)		135	162	31	INCL			OPP	42	
		T (165)		148	148	28	INCL			OPP	42	
	6000	Forward (73)		66	150	28	INCL			BOTH	42	
		Reverse (83)		75	150	28	INCL			BOTH	42	







FOOT NOTES:

F4: Limited clearance for direct mount pumps. Â May find better clearance with "1" assembly arrangement (shaft high).

F5: ASW Transmission Code requires connection to TCM.

Left side opening not usable on ASW and ASX transmissions due to countershaft brake.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

T-11605A/B **T-905A/B/H/P** **T-955AL/ALL**

FUL.25

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		60	250	47	INCL	(F6,7)		OPP	01	
		C (73)		80	250	47	INCL	(F6,7)		OPP	01	
		E (86)		95	225	43	INCL	(F6,7)		OPP	01	
		J (95)		104	225	43	INCL	(F6,7)		OPP	01	
		O (125)		136	195	37	INCL	(F6,7)		OPP	01	
		R (137)		149	180	34	INCL	(F6,7)		OPP	01	
		S (150)		164	162	31	INCL	(F6,7)		OPP	01	
		T (165)		180	148	28	INCL	(F6,7)		OPP	01	
3200		Z (40)		44	250	47	INCL	(F6,7)		OPP	01	
		A (50)		55	250	47	INCL	(F6,7)		OPP	01	
		B (55)		60	250	47	INCL	(F6,7)		OPP	01	
		C (73)		80	250	47	INCL	(F6,7)		OPP	01	
		E (86)		95	225	43	INCL	(F6,7)		OPP	01	
		J (95)		104	225	43	INCL	(F6,7)		OPP	01	
		O (125)		136	195	37	INCL	(F6,7)		OPP	01	
		R (137)		149	180	34	INCL	(F6,7)		OPP	01	
		S (150)		164	162	31	INCL	(F6,7)		OPP	01	
		T (165)		180	148	28	INCL	(F6,7)		OPP	01	
6000		Forward (73)		80	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		90	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

T-11605A/B **T-905A/B/H/P** **T-955AL/ALL** **FUL.25**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		53	250	47	INCL			OPP	O1	
		B (55)		63	250	47	INCL			OPP	O1	
		C (73)		83	250	47	INCL			OPP	O1	
		E (86)		99	225	43	INCL			OPP	O1	
	2000	J (95)		108	225	43	INCL			OPP	O1	
		O (125)		142	180	34	INCL			OPP	O1	↑ 1B
		R (137)		156	170	32	INCL			OPP	O1	
		S (150)		171	155	29	INCL			OPP	O1	
		T (165)		188	140	27	INCL			OPP	O1	
		Z (40)		46	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		A (50)		57	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		B (55)		63	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		C (73)		83	250	47	INCL	CLUTCH SHIFT		OPP	O1	
	3800	E (86)		100	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		J (95)		109	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		O (125)		142	195	37	INCL	CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		156	180	34	INCL	CLUTCH SHIFT		OPP	O1	
		S (150)		171	162	31	INCL	CLUTCH SHIFT		OPP	O1	
		T (165)		188	148	28	INCL	CLUTCH SHIFT		OPP	O1	
		B (57)		62	420	80	INCL			OPP	O1	
	4100	C (70)		76	350	66	INCL			OPP	O1	
		E (86)		94	285	54	INCL			OPP	O1	
		J (105)		114	235	44	INCL			OPP	O1	↑ 1B
		Output 1 C (96)		75	355	67	INCL	(F25)		OPP	O1	
		Output 2 B (89)		70	380	72	INCL	(F25)		OPP	O1	
		Output 1 E (112)		88	300	57	INCL	(F25)		OPP	O1	
		Output 2 C (104)		81	325	62	INCL	(F25)		OPP	O1	
	4250	Output 1 J (132)		103	260	49	INCL	(F25)		OPP	O1	
		Output 2 E (121)		95	280	53	INCL	(F25)		OPP	O1	
		Output 1 O (168)		132	200	38	INCL	(F25)		OPP	O1	
		Output 2 J (152)		119	220	42	INCL	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-11605A/B **T-905A/B/H/P** **T-955AL/ALL** **FUL.25**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		60	150	28	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		57	150	28	INCL			BOTH	O1	
	8000	Forward (40)		47	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		56	500	95	INCL			BOTH	O1	
	8500	B (57)		43	500	95	INCL			OPP	O1	
		C (70)		57	485	92	INCL			OPP	O1	
		E (86)		68	400	76	INCL			OPP	O1	 ↑ 1B
		J (105)		85	325	62	INCL			OPP	O1	
		O (127)		98	270	51	INCL			OPP	O1	
		R (137)		107	250	47	INCL			OPP	O1	
		S (150)		117	225	43	INCL			OPP	O1	
		T (165)		129	210	40	INCL			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.






F7: For vehicles with Spring Hanger interference use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FS-5005B **FS-5205B**

FUL.26

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		25	250	47	INCL			ENG	06	
		C (73)		33	250	47	INCL			ENG	06	
		E (86)		39	225	43	INCL			ENG	06	
	1000	J (95)		43	225	43	INCL			ENG	06	
		O (125)		56	195	37	INCL			ENG	06	
		R (137)		62	180	34	INCL			ENG	06	
		S (150)		67	162	31	INCL			ENG	06	
		T (165)		74	148	28	INCL			ENG	06	
		B (55)		45	250	47	S3		GA6093	OPP	30	
		C (73)		59	250	47	S3		GA6093	OPP	30	
		E (86)		70	225	43	S3		GA6093	OPP	30	
	1000	J (95)		77	225	43	S3		GA6093	OPP	30	
		O (125)		101	195	37	S3		GA6093	OPP	30	
		R (137)		111	180	34	S3		GA6093	OPP	30	
		S (150)		122	162	31	S3		GA6093	OPP	30	
		T (165)		134	148	28	S3		GA6093	OPP	30	
		Z (40)		19	250	47	S3		GA6093	OPP	30	
		A (50)		23	250	47	S3		GA6093	OPP	30	
		B (55)		26	250	47	S3		GA6093	OPP	30	
		C (73)		34	250	47	S3		GA6093	OPP	30	
		E (86)		41	225	43	S3		GA6093	OPP	30	
	3200	J (95)		45	225	43	S3		GA6093	OPP	30	
		O (125)		58	195	37	S3		GA6093	OPP	30	
		R (137)		64	180	34	S3		GA6093	OPP	30	
		S (150)		70	162	31	S3		GA6093	OPP	30	
		T (165)		77	148	28	S3		GA6093	OPP	30	
	6000	Forward (73)		32	150	28	INCL			BOTH	06	
		Reverse (83)		37	150	28	INCL			BOTH	06	
	6000	Forward (73)		59	150	28	S3		GA6093	BOTH	30	
		Reverse (83)		67	150	28	S3		GA6093	BOTH	30	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FS-5005C **FS-5205C**

FUL.27



6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
	1000	B (55)		24	250	47	INCL			ENG	06	
		C (73)		32	250	47	INCL			ENG	06	
		E (86)		39	225	43	INCL			ENG	06	
		J (95)		42	225	43	INCL			ENG	06	
		O (125)		56	195	37	INCL			ENG	06	
		R (137)		61	180	34	INCL			ENG	06	
		S (150)		67	162	31	INCL			ENG	06	
		T (165)		73	148	28	INCL			ENG	06	
	1000	B (55)		41	250	47	S3		6187S	OPP	22	
		C (73)		54	250	47	S3		6187S	OPP	22	
		E (86)		65	225	43	S3		6187S	OPP	22	
		J (95)		71	225	43	S3		6187S	OPP	22	
		O (125)		93	195	37	S3		6187S	OPP	22	
		R (137)		101	180	34	S3		6187S	OPP	22	
		S (150)		111	162	31	S3		6187S	OPP	22	
		T (165)		122	148	28	S3		6187S	OPP	22	
	3200	Z (40)		30	250	47	S3		6187S	OPP	22	
		A (50)		37	250	47	S3		6187S	OPP	22	
		B (55)		41	250	47	S3		6187S	OPP	22	
		C (73)		54	250	47	S3		6187S	OPP	22	
		E (86)		65	225	43	S3		6187S	OPP	22	
		J (95)		71	225	43	S3		6187S	OPP	22	
		O (125)		93	195	37	S3		6187S	OPP	22	
		R (137)		101	180	34	S3		6187S	OPP	22	
		S (150)		111	162	31	S3		6187S	OPP	22	
		T (165)		122	148	28	S3		6187S	OPP	22	
	6000	Forward (73)		32	150	28	INCL			BOTH	06	
		Reverse (83)		37	150	28	INCL			BOTH	06	
	6000	Forward (73)		54	150	28	S3		6187S	BOTH	22	
		Reverse (83)		61	150	28	S3		6187S	BOTH	22	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FSM-5005H **FSM-5305H**

FUL.28

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		45	250	47	INCL		GA6062	OPP	30	
		C (73)		59	250	47	INCL		GA6062	OPP	30	
		E (86)		71	225	43	INCL		GA6062	OPP	30	
		J (95)		77	225	43	INCL		GA6062	OPP	30	
		O (125)		102	195	37	INCL		GA6062	OPP	30	
		R (137)		112	180	34	INCL		GA6062	OPP	30	
		S (150)		122	162	31	INCL		GA6062	OPP	30	
		T (165)		134	148	28	INCL		GA6062	OPP	30	
	3200	Z (40)		33	250	47	INCL		GA6062	OPP	30	
		A (50)		41	250	47	INCL		GA6062	OPP	30	
		B (55)		45	250	47	INCL		GA6062	OPP	30	
		C (73)		59	250	47	INCL		GA6062	OPP	30	
		E (86)		71	225	43	INCL		GA6062	OPP	30	
		J (95)		78	225	43	INCL		GA6062	OPP	30	
		O (125)		102	195	37	INCL		GA6062	OPP	30	
		R (137)		111	180	34	INCL		GA6062	OPP	30	
		S (150)		122	162	31	INCL		GA6062	OPP	30	
		T (165)		134	148	28	INCL		GA6062	OPP	30	
	6000	Forward (73)		59	150	28	INCL		GA6062	BOTH	30	
		Reverse (83)		68	150	28	INCL		GA6062	BOTH	30	




For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FSM-5005J

FUL.29

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		43	250	47	INCL		GA6062	OPP	30	
		C (73)		58	250	47	INCL		GA6062	OPP	30	
		E (86)		69	225	43	INCL		GA6062	OPP	30	
		J (95)		75	225	43	INCL		GA6062	OPP	30	
		O (125)		99	195	37	INCL		GA6062	OPP	30	
		R (137)		108	180	34	INCL		GA6062	OPP	30	
		S (150)		118	162	31	INCL		GA6062	OPP	30	
		T (165)		130	148	28	INCL		GA6062	OPP	30	
3200		Z (40)		32	250	47	INCL		GA6062	OPP	30	
		A (50)		39	250	47	INCL		GA6062	OPP	30	
		B (55)		43	250	47	INCL		GA6062	OPP	30	
		C (73)		58	250	47	INCL		GA6062	OPP	30	
		E (86)		69	225	43	INCL		GA6062	OPP	30	
		J (95)		76	225	43	INCL		GA6062	OPP	30	
		O (125)		99	195	37	INCL		GA6062	OPP	30	
		R (137)		108	180	34	INCL		GA6062	OPP	30	
		S (150)		118	162	31	INCL		GA6062	OPP	30	
		T (165)		130	148	28	INCL		GA6062	OPP	30	
6000		Forward (73)		58	150	28	INCL		GA6062	BOTH	30	
		Reverse (83)		66	150	28	INCL		GA6062	BOTH	30	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RT-11608 **RT-14608** **RT-8606L** **RT-8608L** **RT-9508** **FUL.30**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		65	250	47	INCL	(F6,7)		OPP	01	
		C (73)		86	250	47	INCL	(F6,7)		OPP	01	
		E (86)		103	225	43	INCL	(F6,7)		OPP	01	
		J (95)		112	225	43	INCL	(F6,7)		OPP	01	
	1000	O (125)		148	195	37	INCL	(F6,7)		OPP	01	
		R (137)		162	180	34	INCL	(F6,7)		OPP	01	
		S (150)		177	162	31	INCL	(F6,7)		OPP	01	
		T (165)		195	148	28	INCL	(F6,7)		OPP	01	
		Z (40)		47	250	47	INCL	(F6,7)		OPP	01	
		A (50)		59	250	47	INCL	(F6,7)		OPP	01	
		B (55)		65	250	47	INCL	(F6,7)		OPP	01	
		C (73)		86	250	47	INCL	(F6,7)		OPP	01	
		E (86)		103	225	43	INCL	(F6,7)		OPP	01	
	3200	J (95)		113	225	43	INCL	(F6,7)		OPP	01	
		O (125)		148	195	37	INCL	(F6,7)		OPP	01	
		R (137)		162	180	34	INCL	(F6,7)		OPP	01	
		S (150)		177	162	31	INCL	(F6,7)		OPP	01	
		T (165)		195	148	28	INCL	(F6,7)		OPP	01	
	6000	Forward (73)		86	150	28	INCL			BOTH	01	
		Reverse (83)		98	150	28	INCL			BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RT-11608 **RT-14608** **RT-8606L** **RT-8608L** **RT-9508** **FUL.30**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		59	250	47	INCL	(F11)		OPP	O1	
		B (55)		68	250	47	INCL	(F11)		OPP	O1	
		C (73)		90	250	47	INCL	(F11)		OPP	O1	
		E (86)		107	225	43	INCL	(F11)		OPP	O1	
	2000	J (95)		117	225	43	INCL	(F11)		OPP	O1	
		O (125)		154	180	34	INCL	(F11)		OPP	O1	↑ 1B
		R (137)		169	170	32	INCL	(F11)		OPP	O1	
		S (150)		185	155	29	INCL	(F11)		OPP	O1	
		T (165)		204	140	27	INCL	(F11)		OPP	O1	
		Z (40)		49	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		A (50)		62	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (55)		68	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		C (73)		90	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		E (86)		108	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
	3800	J (95)		118	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		O (125)		154	195	37	INCL	(F11) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		169	180	34	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		S (150)		185	162	31	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		T (165)		203	148	28	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (57)		67	420	80	INCL	(F11)		OPP	O1	
		C (70)		83	350	66	INCL	(F11)		OPP	O1	
	4100	E (86)		102	285	54	INCL	(F11)		OPP	O1	
		J (105)		124	235	44	INCL	(F11)		OPP	O1	↑ 1B
		Output 1 C (96)		82	355	67	INCL	(F11,25)		OPP	O1	
		Output 2 B (89)		76	380	72	INCL	(F11,25)		OPP	O1	
		Output 1 E (112)		96	300	57	INCL	(F11,25)		OPP	O1	
		Output 2 C (104)		88	325	62	INCL	(F11,25)		OPP	O1	
	4250	Output 1 J (132)		112	260	49	INCL	(F11,25)		OPP	O1	
		Output 2 E (121)		103	280	53	INCL	(F11,25)		OPP	O1	↑ 1B
		Output 1 O (168)		143	200	38	INCL	(F11,25)		OPP	O1	
		Output 2 J (152)		129	220	42	INCL	(F11,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RT-11608 **RT-14608** **RT-8606L** **RT-8608L** **RT-9508** **FUL.30**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		65	150	28	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (52)		61	150	28	INCL	(F11)		BOTH	O1	
	8000	Forward (40)		51	500	95	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (50)		61	500	95	INCL	(F11)		BOTH	O1	
	8500	B (57)		47	500	95	INCL	(F11)		OPP	O1	
		C (70)		62	485	92	INCL	(F11)		OPP	O1	
		E (86)		74	400	76	INCL	(F11)		OPP	O1	
		J (105)		92	325	62	INCL	(F11)		OPP	O1	 ↑ 1B
		O (127)		106	270	51	INCL	(F11)		OPP	O1	
		R (137)		116	250	47	INCL	(F11)		OPP	O1	
		S (150)		127	225	43	INCL	(F11)		OPP	O1	
		T (165)		140	210	40	INCL	(F11)		OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.




F7: For vehicles with Spring Hanger interference use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

TO-11605C **TO-905C**

FUL.31

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		68	250	47	INCL	(F7)		OPP	01	 1R
		C (73)		91	250	47	INCL	(F7)		OPP	01	
		E (86)		108	225	43	INCL	(F7)		OPP	01	
		J (95)		118	225	43	INCL	(F7)		OPP	01	
		O (125)		155	195	37	INCL	(F7)		OPP	01	
		R (137)		170	180	34	INCL	(F7)		OPP	01	
		S (150)		186	162	31	INCL	(F7)		OPP	01	
		T (165)		205	148	28	INCL	(F7)		OPP	01	
3200		Z (40)		50	250	47	INCL	(F7)		OPP	01	 1R
		A (50)		62	250	47	INCL	(F7)		OPP	01	
		B (55)		68	250	47	INCL	(F7)		OPP	01	
		C (73)		91	250	47	INCL	(F7)		OPP	01	
		E (86)		109	225	43	INCL	(F7)		OPP	01	
		J (95)		119	225	43	INCL	(F7)		OPP	01	
		O (125)		155	195	37	INCL	(F7)		OPP	01	
		R (137)		170	180	34	INCL	(F7)		OPP	01	
		S (150)		186	162	31	INCL	(F7)		OPP	01	
		T (165)		204	148	28	INCL	(F7)		OPP	01	
6000		Forward (73)		91	150	28	INCL	(F7)		BOTH	01	 1R
		Reverse (83)		103	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

TO-11605C **TO-905C**

FUL.31

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		60	250	47	INCL			OPP	O1	
		B (55)		71	250	47	INCL			OPP	O1	
		C (73)		95	250	47	INCL			OPP	O1	
		E (86)		113	225	43	INCL			OPP	O1	
	2000	J (95)		123	225	43	INCL			OPP	O1	
		O (125)		162	180	34	INCL			OPP	O1	↑ 1B
		R (137)		178	170	32	INCL			OPP	O1	
		S (150)		195	155	29	INCL			OPP	O1	
		T (165)		214	140	27	INCL			OPP	O1	
		Z (40)		52	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		A (50)		65	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		B (55)		71	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		C (73)		95	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		E (86)		113	225	43	INCL	CLUTCH SHIFT		OPP	O1	
	3800	J (95)		124	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		O (125)		162	195	37	INCL	CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		177	180	34	INCL	CLUTCH SHIFT		OPP	O1	
		S (150)		195	162	31	INCL	CLUTCH SHIFT		OPP	O1	
		T (165)		214	148	28	INCL	CLUTCH SHIFT		OPP	O1	
		B (57)		71	420	80	INCL			OPP	O1	
		C (70)		87	350	66	INCL			OPP	O1	
	4100	E (86)		107	285	54	INCL			OPP	O1	
		J (105)		130	235	44	INCL			OPP	O1	↑ 1B
		Output 1 C (96)		86	355	67	INCL	(F25)		OPP	O1	
		Output 2 B (89)		80	380	72	INCL	(F25)		OPP	O1	
		Output 1 E (112)		100	300	57	INCL	(F25)		OPP	O1	
		Output 2 C (104)		93	325	62	INCL	(F25)		OPP	O1	
	4250	Output 1 J (132)		118	260	49	INCL	(F25)		OPP	O1	
		Output 2 E (121)		108	280	53	INCL	(F25)		OPP	O1	↑ 1B
		Output 1 O (168)		150	200	38	INCL	(F25)		OPP	O1	
		Output 2 J (152)		136	220	42	INCL	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

TO-11605C **TO-905C**

FUL.31

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		68	150	28	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		65	150	28	INCL			BOTH	O1	
	8000	Forward (40)		53	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		64	500	95	INCL			BOTH	O1	
	8500	B (57)		49	500	95	INCL			OPP	O1	
		C (70)		65	485	92	INCL			OPP	O1	
		E (86)		78	400	76	INCL			OPP	O1	
		J (105)		96	325	62	INCL			OPP	O1	 ↑ 1B
		O (127)		111	270	51	INCL			OPP	O1	
		R (137)		122	250	47	INCL			OPP	O1	
		S (150)		134	225	43	INCL			OPP	O1	
		T (165)		147	210	40	INCL			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.



F7: For vehicles with Spring Hanger interference use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

T-11605D/M **T-905D/M**

FUL.32

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		70	250	47	INCL	(F7)		OPP	01	 1R
		C (73)		92	250	47	INCL	(F7)		OPP	01	
		E (86)		110	225	43	INCL	(F7)		OPP	01	
		J (95)		120	225	43	INCL	(F7)		OPP	01	
		O (125)		158	195	37	INCL	(F7)		OPP	01	
		R (137)		173	180	34	INCL	(F7)		OPP	01	
		S (150)		190	162	31	INCL	(F7)		OPP	01	
		T (165)		209	148	28	INCL	(F7)		OPP	01	
3200		Z (40)		51	250	47	INCL	(F7)		OPP	01	 1R
		A (50)		63	250	47	INCL	(F7)		OPP	01	
		B (55)		70	250	47	INCL	(F7)		OPP	01	
		C (73)		92	250	47	INCL	(F7)		OPP	01	
		E (86)		111	225	43	INCL	(F7)		OPP	01	
		J (95)		121	225	43	INCL	(F7)		OPP	01	
		O (125)		158	195	37	INCL	(F7)		OPP	01	
		R (137)		173	180	34	INCL	(F7)		OPP	01	
		S (150)		190	162	31	INCL	(F7)		OPP	01	
		T (165)		209	148	28	INCL	(F7)		OPP	01	
6000		Forward (73)		92	150	28	INCL	(F7)		BOTH	01	 1R
		Reverse		105	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-11605D/M **T-905D/M**

FUL.32

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		62	250	47	INCL			OPP	O1	 ↑ 1B
		B (55)		73	250	47	INCL			OPP	O1	
		C (73)		97	250	47	INCL			OPP	O1	
		E (86)		115	225	43	INCL			OPP	O1	
		J (95)		126	225	43	INCL			OPP	O1	
		O (125)		165	180	34	INCL			OPP	O1	
		R (137)		181	170	32	INCL			OPP	O1	
		S (150)		198	155	29	INCL			OPP	O1	
		T (165)		218	140	27	INCL			OPP	O1	
	3800	Z (40)		53	250	47	INCL	CLUTCH SHIFT		OPP	O1	 ↑ 1B
		A (50)		66	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		B (55)		73	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		C (73)		97	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		E (86)		116	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		J (95)		126	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		O (125)		165	195	37	INCL	CLUTCH SHIFT		OPP	O1	
		R (137)		181	180	34	INCL	CLUTCH SHIFT		OPP	O1	
		S (150)		198	162	31	INCL	CLUTCH SHIFT		OPP	O1	
		T (165)		218	148	28	INCL	CLUTCH SHIFT		OPP	O1	
	4100	B (57)		72	420	80	INCL			OPP	O1	 ↑ 1B
		C (70)		89	350	66	INCL			OPP	O1	
		E (86)		109	285	54	INCL			OPP	O1	
		J (105)		133	235	44	INCL			OPP	O1	
	4250	Output 1 C (96)		87	355	67	INCL	(F25)		OPP	O1	 ↑ 1B
		Output 2 B (89)		81	380	72	INCL	(F25)		OPP	O1	
		Output 1 E (112)		102	300	57	INCL	(F25)		OPP	O1	
		Output 2 C (104)		94	325	62	INCL	(F25)		OPP	O1	
		Output 1 J (132)		120	260	49	INCL	(F25)		OPP	O1	
		Output 2 E (121)		110	280	53	INCL	(F25)		OPP	O1	
		Output 1 O (168)		153	200	38	INCL	(F25)		OPP	O1	
		Output 2 J (152)		139	220	42	INCL	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

T-11605D/M **T-905D/M**

FUL.32

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		70	150	28	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		66	150	28	INCL			BOTH	O1	
	8000	Forward (40)		55	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		65	500	95	INCL			BOTH	O1	
	8500	B (57)		50	500	95	INCL			OPP	O1	
		C (70)		66	485	92	INCL			OPP	O1	
		E (86)		79	400	76	INCL			OPP	O1	
		J (105)		98	325	62	INCL			OPP	O1	 ↑ 1B
		O (127)		114	270	51	INCL			OPP	O1	
		R (137)		125	250	47	INCL			OPP	O1	
		S (150)		136	225	43	INCL			OPP	O1	
		T (165)		150	210	40	INCL			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.




F7: For vehicles with Spring Hanger interferenceuse adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

TO-11605B **TO-905B**

FUL.33

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		70	250	47	INCL	(F6,7)		OPP	01	 1R
		C (73)		92	250	47	INCL	(F6,7)		OPP	01	
		E (86)		110	225	43	INCL	(F6,7)		OPP	01	
		J (95)		120	225	43	INCL	(F6,7)		OPP	01	
		O (125)		158	195	37	INCL	(F6,7)		OPP	01	
		R (137)		173	180	34	INCL	(F6,7)		OPP	01	
		S (150)		190	162	31	INCL	(F6,7)		OPP	01	
		T (165)		209	148	28	INCL	(F6,7)		OPP	01	
3200		Z (40)		51	250	47	INCL	(F6,7)		OPP	01	 1R
		A (50)		63	250	47	INCL	(F6,7)		OPP	01	
		B (55)		70	250	47	INCL	(F6,7)		OPP	01	
		C (73)		92	250	47	INCL	(F6,7)		OPP	01	
		E (86)		111	225	43	INCL	(F6,7)		OPP	01	
		J (95)		121	225	43	INCL	(F6,7)		OPP	01	
		O (125)		158	195	37	INCL	(F6,7)		OPP	01	
		R (137)		173	180	34	INCL	(F6,7)		OPP	01	
		S (150)		190	162	31	INCL	(F6,7)		OPP	01	
		T (165)		209	148	28	INCL	(F6,7)		OPP	01	
6000		Forward (73)		92	150	28	INCL	(F7)		BOTH	01	 1R
		Reverse (83)		105	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

TO-11605B **TO-905B**

FUL.33

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		54	250	47	INCL	(F11)		OPP	O1	
		B (55)		73	250	47	INCL	(F11)		OPP	O1	
		C (73)		97	250	47	INCL	(F11)		OPP	O1	
		E (86)		115	225	43	INCL	(F11)		OPP	O1	
	2000	J (95)		126	225	43	INCL	(F11)		OPP	O1	
		O (125)		165	180	34	INCL	(F11)		OPP	O1	↑ 1B
		R (137)		181	170	32	INCL	(F11)		OPP	O1	
		S (150)		198	155	29	INCL	(F11)		OPP	O1	
		T (165)		218	140	27	INCL	(F11)		OPP	O1	
		Z (40)		53	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		A (50)		66	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (55)		73	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		C (73)		97	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		E (86)		116	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
	3800	J (95)		126	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		O (125)		165	195	37	INCL	(F11) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		181	180	34	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		S (150)		198	162	31	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		T (165)		218	148	28	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (57)		72	420	80	INCL	(F11)		OPP	O1	
		C (70)		89	350	66	INCL	(F11)		OPP	O1	
	4100	E (86)		109	285	54	INCL	(F11)		OPP	O1	
		J (105)		133	235	44	INCL	(F11)		OPP	O1	↑ 1B
		Output 1 C (96)		87	355	67	INCL	(F11,25)		OPP	O1	
		Output 2 B (89)		81	380	72	INCL	(F11,25)		OPP	O1	
		Output 1 E (112)		102	300	57	INCL	(F11,25)		OPP	O1	
		Output 2 C (104)		94	325	62	INCL	(F11,25)		OPP	O1	
	4250	Output 1 J (132)		120	260	49	INCL	(F11,25)		OPP	O1	
		Output 2 E (121)		110	280	53	INCL	(F11,25)		OPP	O1	↑ 1B
		Output 1 O (168)		153	200	38	INCL	(F11,25)		OPP	O1	
		Output 2 J (152)		139	220	42	INCL	(F11,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

TO-11605B **TO-905B**

FUL.33

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)	70	150	28	INCL	(F11)			BOTH	O1	 ↑ 1B
		Reverse (52)	66	150	28	INCL	(F11)			BOTH	O1	
	8000	Forward (40)	55	500	95	INCL	(F11)			BOTH	O1	 ↑ 1B
		Reverse (50)	65	500	95	INCL	(F11)			BOTH	O1	
	8500	B (57)	50	500	95	INCL	(F11)			OPP	O1	
		C (70)	66	485	92	INCL	(F11)			OPP	O1	
		E (86)	79	400	76	INCL	(F11)			OPP	O1	
		J (105)	98	325	62	INCL	(F11)			OPP	O1	 ↑ 1B
		O (127)	114	270	51	INCL	(F11)			OPP	O1	
		R (137)	125	250	47	INCL	(F11)			OPP	O1	
		S (150)	136	225	43	INCL	(F11)			OPP	O1	
		T (165)	150	210	40	INCL	(F11)			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.


F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FRLO-14410C/C-T2 **FRLO-15410C** **F-LO-15410C-T2** **FRLO-16410C/C-T2** **FRLO-18410C-T2** **FUL.34**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		65	250	47	M1	(F14)		OPP	66	
		C (73)		86	250	47	M1	(F14)		OPP	66	
		E (86)		102	225	43	M1	(F14)		OPP	66	
		J (95)		113	225	43	M1	(F14)		OPP	66	
	1100	O (125)		148	195	37	M1	(F14)		OPP	66	
		R (137)		162	180	34	M1	(F14)		OPP	66	
		S (150)		178	162	31	M1	(F14)		OPP	66	
		T (165)		195	148	28	M1	(F14)		OPP	66	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:




F14: Kenworth and Mack chassis with set back front axle may encounter spring hanger interference. Use adapter AD622-66-01 and change the PTO input gear to "01"

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FR-11210B
FR-12210B
FR-13210B
FR-14210B
FR-15210B
FR-9210
FR-9210B
FRW-15210B
RT-11209H
RT-11210B
RT-12209H
RT-12210B
RT-13209H
RT-13210B
RT-14209H
RT-14210B

FUL.36

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		73	250	47	M1	(F6)		OPP	O1	
		C (73)		97	250	47	M1	(F6)		OPP	O1	
		E (86)		116	225	43	M1	(F6)		OPP	O1	
		J (95)		126	225	43	M1	(F6)		OPP	O1	
		O (125)		166	195	37	M1	(F6)		OPP	O1	
		R (137)		182	180	34	M1	(F6)		OPP	O1	
		S (150)		199	162	31	M1	(F6)		OPP	O1	
		T (165)		219	148	28	M1	(F6)		OPP	O1	
3200		Z (40)		53	250	47	M1	(F6) CLUTCH SHIFT		OPP	O1	
		A (50)		66	250	47	M1	(F6) CLUTCH SHIFT		OPP	O1	
		B (55)		73	250	47	M1	(F6) CLUTCH SHIFT		OPP	O1	
		C (73)		97	250	47	M1	(F6) CLUTCH SHIFT		OPP	O1	
		E (86)		116	225	43	M1	(F6) CLUTCH SHIFT		OPP	O1	
		J (95)		127	225	43	M1	(F6) CLUTCH SHIFT		OPP	O1	
		O (125)		166	195	37	M1	(F6) CLUTCH SHIFT		OPP	O1	
		R (137)		182	180	34	M1	(F6) CLUTCH SHIFT		OPP	O1	
		S (150)		199	162	31	M1	(F6) CLUTCH SHIFT		OPP	O1	
		T (165)		219	148	28	M1	(F6) CLUTCH SHIFT		OPP	O1	
6000		Forward (73)		97	150	28	M1			BOTH	O1	
		Reverse (83)		110	150	28	M1			BOTH	O1	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FR-11210B
FR-12210B
FR-13210B
FR-14210B
FR-15210B
FR-9210
FR-9210B
FRW-15210B
RT-11209H
RT-11210B
RT-12209H
RT-12210B
RT-13209H
RT-13210B
RT-14209H
RT-14210B

FUL.36

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		71	250	47	M2			OPP	O1	 ↑ 1B
		B (55)		76	250	47	M2			OPP	O1	
		C (73)		101	250	47	M2			OPP	O1	
		E (86)		121	225	43	M2			OPP	O1	
		J (95)		132	225	43	M2			OPP	O1	
		O (125)		174	180	34	M2			OPP	O1	
		R (137)		190	170	32	M2			OPP	O1	
		S (150)		208	155	29	M2			OPP	O1	
		T (165)		229	140	27	M2			OPP	O1	
	3800	Z (40)		56	250	47	M2	CLUTCH SHIFT		OPP	O1	 ↑ 1B
		A (50)		69	250	47	M2	CLUTCH SHIFT		OPP	O1	
		B (55)		76	250	47	M2	CLUTCH SHIFT		OPP	O1	
		C (73)		101	250	47	M2	CLUTCH SHIFT		OPP	O1	
		E (86)		122	225	43	M2	CLUTCH SHIFT		OPP	O1	
		J (95)		133	225	43	M2	CLUTCH SHIFT		OPP	O1	
		O (125)		174	195	37	M2	CLUTCH SHIFT		OPP	O1	
		R (137)		190	180	34	M2	CLUTCH SHIFT		OPP	O1	
		S (150)		208	162	31	M2	CLUTCH SHIFT		OPP	O1	
		T (165)		229	148	28	M2	CLUTCH SHIFT		OPP	O1	
	4100	B (57)		76	420	80	M2			OPP	O1	 ↑ 1B
		C (70)		93	350	66	M2			OPP	O1	
		E (86)		114	285	54	M2			OPP	O1	
		J (105)		139	235	44	M2			OPP	O1	
	4250	Output 1 C (96)		92	355	67	M2	(F25)		OPP	O1	 ↑ 1B
		Output 2 B (89)		85	380	72	M2	(F25)		OPP	O1	
		Output 1 E (112)		107	300	57	M2	(F25)		OPP	O1	
		Output 2 C (104)		99	325	62	M2	(F25)		OPP	O1	
		Output 1 J (132)		126	260	49	M2	(F25)		OPP	O1	
		Output 2 E (121)		115	280	53	M2	(F25)		OPP	O1	
		Output 1 O (168)		161	200	38	M2	(F25)		OPP	O1	
		Output 2 J (152)		145	220	42	M2	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FR-11210B **FR-14210B** **FR-9210B** **RT-11210B** **RT-13209H** **RT-14210B**
FR-12210B **FR-15210B** **FRW-15210B** **RT-12209H** **RT-13210B**
FR-13210B **FR-9210** **RT-11209H** **RT-12210B** **RT-14209H**

FUL.36

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		73	150	28	M2			BOTH	O1	 ↑ 1B
		Reverse (52)		69	150	28	M2			BOTH	O1	
	8000	Forward (40)		57	500	95	M2			BOTH	O1	 ↑ 1B
		Reverse (50)		68	500	95	M2			BOTH	O1	
	8500	B (57)		53	500	95	M2			OPP	O1	
		C (70)		70	485	92	M2			OPP	O1	
		E (86)		83	400	76	M2			OPP	O1	 ↑ 1B
		J (105)		103	325	62	M2			OPP	O1	
		O (127)		119	270	51	M2			OPP	O1	
		R (137)		131	250	47	M2			OPP	O1	
		S (150)		143	225	43	M2			OPP	O1	
		T (165)		158	210	40	M2			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.



F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

EH-6E606A-CD
EH-8E306A-CD/T/U/UP/UPG
ESO-9306A
F-5405B-DM3
F-5505B-DM3
F-6405B-DM3
F-8405B-DM3
FO-5506B-DM3
FO-6406B-DM3
FO-6506B-DM3
FO-8406B-DM3
FSBO-6406B
FSBO-8406B
FSO-6406A
FSO-8406A

FUL.37

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	C (73)		98	250	47	S7		GA6032/6500S	OPP	28	
		E (86)		117	225	43	S7		GA6032/6500S	OPP	28	
		J (95)		127	225	43	S7		GA6032/6500S	OPP	28	
		O (125)		168	195	37	S7		GA6032/6500S	OPP	28	
		R (137)		184	180	34	S7		GA6032/6500S	OPP	28	
		S (150)		201	162	31	S7		GA6032/6500S	OPP	28	
		T (165)		221	148	28	S7		GA6032/6500S	OPP	28	
	3200	Z (40)		54	250	47	S7		GA6032/6500S	OPP	28	
		A (50)		67	250	47	S7		GA6032/6500S	OPP	28	
		B (55)		74	250	47	S7		GA6032/6500S	OPP	28	
		C (73)		98	250	47	S7		GA6032/6500S	OPP	28	
		E (86)		117	225	43	S7		GA6032/6500S	OPP	28	
		J (95)		128	225	43	S7		GA6032/6500S	OPP	28	
		O (125)		168	195	37	S7		GA6032/6500S	OPP	28	
		R (137)		183	180	34	S7		GA6032/6500S	OPP	28	
		S (150)		201	162	31	S7		GA6032/6500S	OPP	28	
		T (165)		221	148	28	S7		GA6032/6500S	OPP	28	
	6000	Forward (73)		98	150	28	S7		GA6032/6500S	BOTH	28	
		Reverse (83)		111	150	28	S7		GA6032/6500S	BOTH	28	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F2: EH8-E306A Transmissions are Hybrid and must Interface with PTO and TCM. Only one opening is usable.

F3: AW3 & DM3 Transmission Codes require PTO connection to TCM per Eaton. Engine Speeds above 1000 RPM are required for PTO operation on code DM3.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

TO-11607B-ASX **TO-14607B-ASX** **TX-14607B** **TX-8607B**

FUL.38

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		74	250	47	S3	(F20,24)	6187S	OPP	27	 2R
		C (73)		98	250	47	S3	(F20,24)	6187S	OPP	27	
		E (86)		116	225	43	S3	(F20,24)	6187S	OPP	27	
		J (95)		127	225	43	S3	(F20,24)	6187S	OPP	27	
		O (125)		167	195	37	S3	(F20,24)	6187S	OPP	27	
		R (137)		183	180	34	S3	(F20,24)	6187S	OPP	27	
		S (150)		201	162	31	S3	(F20,24)	6187S	OPP	27	
		T (165)		221	148	28	S3	(F20,24)	6187S	OPP	27	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)			250	47	INCL	(F24)	GA8032	OPP	27	 2B
		B (55)		74	250	47	INCL	(F24)	GA8032	OPP	27	
		C (73)		98	250	47	INCL	(F24)	GA8032	OPP	27	
		E (86)		116	225	43	INCL	(F24)	GA8032	OPP	27	
		J (95)		127	225	43	INCL	(F24)	GA8032	OPP	27	
		O (125)		167	180	34	INCL	(F24)	GA8032	OPP	27	
		R (137)		183	170	32	INCL	(F24)	GA8032	OPP	27	
		S (150)		201	155	29	INCL	(F24)	GA8032	OPP	27	
		T (165)		221	140	27	INCL	(F24)	GA8032	OPP	27	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F20: Direct mount pumps will not clear bulge on transmission. Use of adapter will not work.

F24: Interference with outside diameter of transmissionâ™s PTO driver gear for Ratios "O" and above.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FM-14D310B-LST FM-14E310B-LAS FM-15D310B-LST FM-15E310B-LAS

FUL.39

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		79	250	47	INCL	(F6,7,8,9)		OPP	01	 1R
		C (73)		104	250	47	INCL	(F6,7,8,9)		OPP	01	
		E (86)		124	225	43	INCL	(F6,7,8,9)		OPP	01	
		J (95)		136	225	43	INCL	(F6,7,8,9)		OPP	01	
		O (125)		178	195	37	INCL	(F6,7,8,9)		OPP	01	
		R (137)		196	180	34	INCL	(F6,7,8,9)		OPP	01	
		S (150)		214	162	31	INCL	(F6,7,8,9)		OPP	01	
		T (165)		236	148	28	INCL	(F6,7,8,9)		OPP	01	
3200		Z (40)		57	250	47	INCL	(F6,7,8,9)		OPP	01	 1R
		A (50)		71	250	47	INCL	(F6,7,8,9)		OPP	01	
		B (55)		79	250	47	INCL	(F6,7,8,9)		OPP	01	
		C (73)		104	250	47	INCL	(F6,7,8,9)		OPP	01	
		E (86)		125	225	43	INCL	(F6,7,8,9)		OPP	01	
		J (95)		137	225	43	INCL	(F6,7,8,9)		OPP	01	
		O (125)		178	195	37	INCL	(F6,7,8,9)		OPP	01	
		R (137)		195	180	34	INCL	(F6,7,8,9)		OPP	01	
		S (150)		214	162	31	INCL	(F6,7,8,9)		OPP	01	
		T (165)		235	148	28	INCL	(F6,7,8,9)		OPP	01	
6000		Forward (73)		104	150	28	INCL	(F8,9)		BOTH		 1R
		Reverse (83)		119	150	28	INCL	(F8,9)		BOTH		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FM-14D310B-LST FM-14E310B-LAS FM-15D310B-LST, FM-15E310B-LAS

FUL.39

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		71	250	47	INCL	(F8,9,11)		OPP	O1	
		B (55)		82	250	47	INCL	(F8,9,11)		OPP	O1	
		C (73)		109	250	47	INCL	(F8,9,11)		OPP	O1	
		E (86)		130	225	43	INCL	(F8,9,11)		OPP	O1	
	2000	J (95)		142	225	43	INCL	(F8,9,11)		OPP	O1	
		O (125)		186	180	34	INCL	(F8,9,11)		OPP	O1	↑ 1B
		R (137)		204	170	32	INCL	(F8,9,11)		OPP	O1	
		S (150)		224	155	29	INCL	(F8,9,11)		OPP	O1	
		T (165)		246	140	27	INCL	(F8,9,11)		OPP	O1	
		Z (40)		60	250	47	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
		A (50)		75	250	47	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
		B (55)		82	250	47	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
		C (73)		109	250	47	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
	3800	E (86)		130	225	43	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
		J (95)		143	225	43	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
		O (125)		186	195	37	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		204	180	34	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
		S (150)		224	162	31	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
		T (165)		246	148	28	INCL	(F8,9,11) CLUTCH SHIFT		OPP	O1	
		B (57)		81	420	80	INCL	(F8,9,11)		OPP	O1	
		C (70)		100	350	66	INCL	(F8,9,11)		OPP	O1	
	4100	E (86)		123	285	54	INCL	(F8,9,11)		OPP	O1	
		J (105)		150	235	44	INCL	(F8,9,11)		OPP	O1	↑ 1B
		Output 1 C (96)		99	355	67	INCL	(F8,9,11,25)			O1	
		Output 2 B (89)		92	380	72	INCL	(F8,9,11,25)			O1	
		Output 1 E (112)		115	300	57	INCL	(F8,9,11,25)			O1	
		Output 2 C (104)		106	325	62	INCL	(F8,9,11,25)			O1	
	4250	Output 1 J (132)		135	260	49	INCL	(F8,9,11,25)			O1	
		Output 2 E (121)		124	280	53	INCL	(F8,9,11,25)			O1	↑ 1B
		Output 1 O (168)		173	200	38	INCL	(F8,9,11,25)			O1	
		Output 2 J (152)		156	220	42	INCL	(F8,9,11,25)			O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FM-14D310B-LST FM-14E310B-LAS FM-15D310B-LST, FM-15E310B-LAS

FUL.39

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		← CONTINUES										
	6800	Forward (55)		78	150	28	INCL	(F8,9,11)		BOTH	O1	↑ 1B
		Reverse (52)		74	150	28	INCL	(F8,9,11)		BOTH	O1	
	8000	Forward (40)		62	500	95	INCL	(F8,9,11)		BOTH	O1	↑ 1B
		Reverse (50)		73	500	95	INCL	(F8,9,11)		BOTH	O1	
	8500	B (57)		56	500	95	INCL	(F8,9,11)		OPP	O1	
		C (70)		75	485	92	INCL	(F8,9,11)		OPP	O1	
		E (86)		89	400	76	INCL	(F8,9,11)		OPP	O1	
		J (105)		111	325	62	INCL	(F8,9,11)		OPP	O1	↑ 1B
		O (127)		128	270	51	INCL	(F8,9,11)		OPP	O1	
		R (137)		140	250	47	INCL	(F8,9,11)		OPP	O1	
		S (150)		154	225	43	INCL	(F8,9,11)		OPP	O1	
		T (165)		169	210	40	INCL	(F8,9,11)		OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

F8: PTO must be wired through the transmission controller per Eaton instructions.

F9: Engine Speed must be advanced to 1000 RPM for PTO operation. PTO will not activate below this speed.

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.




F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FUL.40

FAM-14810B
FAM-15810B
RT-1110
RT-11509
RT-11609A/H
RT-11610
RT-11613
RT-11615
RT-11709H
RT-11710B
RT-11715
RT-12509
RT-12510
RT-12513
RT-12515
RT-12609A/H
RT-12610
RT-12709A/H
RT-12710B/B-AS2
RT-13609A/H
RT-13709H
RT-13710B
RT-14609A/H
RT-14610
RT-14613
RT-14615
RT-14709A/H
RT-14710B/B-AS2
RT-14715
RT-14910B-AS2
RT-14915
RT-15613
RT-15615
RT-15715
RT-8709B
RT-8908LL
RT-906
RT-909A
RT-910
RT-915
RT-9509A/C
RT-9513
RT-9710B
RTA-14710B-AS
RTF-11609A
RTF-11613
RTF-12509
RTF-12510
RTF-12515
RTF-12609A
RTF-12709H
RTF-12710B
RTF-13609A
RTF-13709H
RTF-13710B
RTF-14609A
RTF-14613
RTF-14709H
RTF-14710B
RTF-14715
RTF-14915
RTF-15715
RTF-8908LL
RTF-906
RTF-906A
RTF-909A
RTF-910
RTF-915
RTF-9509A
RTF-9513
RTL-11710B/B-T2
RTL-12710B/B-T2
RTL-13710B
RTL-13710B-T2
RTL-14710B/B-T2
RTLO-11610B/B-T2
RTLO-12610B/B-T2
RTLO-12613B
RTLO-13610B/B-AS/B-T2
RTLO-14610A/B/B-T2
RTLO-14613A/B
RTLO-14618A
RTLO-15610B/B-T2
RTLO-16610B/B-T2
RTLO-16618A
RTLO-17610B/B-T2
RTLO-18610B/B-T2
RTLO-9118A-MT
RTO-11613
RTO-11813
RTO-1213
RTO-12513
RTO-14613
RTO-14713
RTO-14813
RTO-15613
RTO-15618
RTO-15813
RTO-913
RTO-9513
RTOF-9513
T-955GL

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		79	250	47	INCL	(F6,7)		OPP	01	
		C (73)		105	250	47	INCL	(F6,7)		OPP	01	
		E (86)		125	225	43	INCL	(F6,7)		OPP	01	
		J (95)		136	225	43	INCL	(F6,7)		OPP	01	
		O (125)		179	195	37	INCL	(F6,7)		OPP	01	
		R (137)		196	180	34	INCL	(F6,7)		OPP	01	
		S (150)		215	162	31	INCL	(F6,7)		OPP	01	
		T (165)		236	148	28	INCL	(F6,7)		OPP	01	
3200		Z (40)		57	250	47	INCL	(F6,7)		OPP	01	
		A (50)		72	250	47	INCL	(F6,7)		OPP	01	
		B (55)		79	250	47	INCL	(F6,7)		OPP	01	
		C (73)		105	250	47	INCL	(F6,7)		OPP	01	
		E (86)		125	225	43	INCL	(F6,7)		OPP	01	
		J (95)		137	225	43	INCL	(F6,7)		OPP	01	
		O (125)		179	195	37	INCL	(F6,7)		OPP	01	
		R (137)		196	180	34	INCL	(F6,7)		OPP	01	
		S (150)		215	162	31	INCL	(F6,7)		OPP	01	
		T (165)		236	148	28	INCL	(F6,7)		OPP	01	
6000		Forward (73)		105	150	28	INCL			BOTH	01	
		Reverse (83)		119	150	28	INCL			BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTLOF-14618A **RTLOF-16618A**

FUL.40

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		71	250	47	INCL	(F11)		OPP	O1	
		B (55)		82	250	47	INCL	(F11)		OPP	O1	
		C (73)		109	250	47	INCL	(F11)		OPP	O1	
		E (86)		130	225	43	INCL	(F11)		OPP	O1	
	2000	J (95)		142	225	43	INCL	(F11)		OPP	O1	
		O (125)		187	180	34	INCL	(F11)		OPP	O1	↑ 1B
		R (137)		205	170	32	INCL	(F11)		OPP	O1	
		S (150)		224	155	29	INCL	(F11)		OPP	O1	
		T (165)		247	140	27	INCL	(F11)		OPP	O1	
		Z (40)		60	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		A (50)		75	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (55)		82	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		C (73)		109	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		E (86)		131	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
	3800	J (95)		143	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		O (125)		187	195	37	INCL	(F11) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		205	180	34	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		S (150)		224	162	31	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		T (165)		246	148	28	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (57)		82	420	80	INCL	(F11)		OPP	O1	
		C (70)		100	350	66	INCL	(F11)		OPP	O1	
	4100	E (86)		123	285	54	INCL	(F11)		OPP	O1	
		J (105)		150	235	44	INCL	(F11)		OPP	O1	↑ 1B
		Output 1 C (96)		99	355	67	INCL	(F11,25)		OPP	O1	
		Output 2 B (89)		92	380	72	INCL	(F11,25)		OPP	O1	
		Output 1 E (112)		116	300	57	INCL	(F11,25)		OPP	O1	
		Output 2 C (104)		107	325	62	INCL	(F11,25)		OPP	O1	
	4250	Output 1 J (132)		136	260	49	INCL	(F11,25)		OPP	O1	
		Output 2 E (121)		124	280	53	INCL	(F11,25)		OPP	O1	↑ 1B
		Output 1 O (168)		173	200	38	INCL	(F11,25)		OPP	O1	
		Output 2 J (152)		157	220	42	INCL	(F11,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RTLOF-14618A **RTLOF-16618A**

FUL.40

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)	79	150	28	INCL	(F11)			BOTH	O1	 ↑ 1B
		Reverse (52)	74	150	28	INCL	(F11)			BOTH	O1	
	8000	Forward (40)	62	500	95	INCL	(F11)			BOTH	O1	 ↑ 1B
		Reverse (50)	73	500	95	INCL	(F11)			BOTH	O1	
	8500	B (57)	57	500	95	INCL	(F11)			OPP	O1	
		C (70)	75	485	92	INCL	(F11)			OPP	O1	
		E (86)	89	400	76	INCL	(F11)			OPP	O1	
		J (105)	111	325	62	INCL	(F11)			OPP	O1	 ↑ 1B
		O (127)	129	270	51	INCL	(F11)			OPP	O1	
		R (137)	141	250	47	INCL	(F11)			OPP	O1	
		S (150)	154	225	43	INCL	(F11)			OPP	O1	
		T (165)	170	210	40	INCL	(F11)			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.



F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps.Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RT-11109A-AT **RT-12109A-AT** **RT-14109A-AT** **RT-9109A-AT**

FUL.41

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		79	250	47	INCL	(F6,17)		OPP	01	
		C (73)		105	250	47	INCL	(F6,17)		OPP	01	
		E (86)		125	225	43	INCL	(F6,17)		OPP	01	
		J (95)		136	225	43	INCL	(F6,17)		OPP	01	
		O (125)		179	195	37	INCL	(F6,17)		OPP	01	
		R (137)		196	180	34	INCL	(F6,17)		OPP	01	
		S (150)		215	162	31	INCL	(F6,17)		OPP	01	
		T (165)		236	148	28	INCL	(F6,17)		OPP	01	
3200		Z (40)		57	250	47	INCL	(F6,17)		OPP	01	
		A (50)		72	250	47	INCL	(F6,17)		OPP	01	
		B (55)		79	250	47	INCL	(F6,17)		OPP	01	
		C (73)		105	250	47	INCL	(F6,17)		OPP	01	
		E (86)		125	225	43	INCL	(F6,17)		OPP	01	
		J (95)		137	225	43	INCL	(F6,17)		OPP	01	
		O (125)		179	195	37	INCL	(F6,17)		OPP	01	
		R (137)		196	180	34	INCL	(F6,17)		OPP	01	
		S (150)		215	162	31	INCL	(F6,17)		OPP	01	
		T (165)		236	148	28	INCL	(F6,17)		OPP	01	
6000		Forward (73)		105	150	28	INCL	(F17)		BOTH	01	
		Reverse (83)		119	150	28	INCL	(F17)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RT-11109A-AT **RT-12109A-AT** **RT-14109A-AT** **RT-9109A-AT**

FUL.41

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		71	250	47	INCL	(F17,18)		OPP	O1	
		B (55)		82	250	47	INCL	(F17,18)		OPP	O1	
		C (73)		109	250	47	INCL	(F17,18)		OPP	O1	
		E (86)		130	225	43	INCL	(F17,18)		OPP	O1	
	2000	J (95)		142	225	43	INCL	(F17,18)		OPP	O1	
		O (125)		187	180	34	INCL	(F17,18)		OPP	O1	↑ 1B
		R (137)		205	170	32	INCL	(F17,18)		OPP	O1	
		S (150)		224	155	29	INCL	(F17,18)		OPP	O1	
		T (165)		247	140	27	INCL	(F17,18)		OPP	O1	
		Z (40)		60	250	47	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		A (50)		75	250	47	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		B (55)		82	250	47	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		C (73)		109	250	47	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
	3800	E (86)		131	225	43	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		J (95)		143	225	43	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		O (125)		187	195	37	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		205	180	34	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		S (150)		224	162	31	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		T (165)		246	148	28	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		B (57)		82	420	80	INCL	(F17,18)		OPP	O1	
		C (70)		100	350	66	INCL	(F17,18)		OPP	O1	
	4100	E (86)		123	285	54	INCL	(F17,18)		OPP	O1	
		J (105)		150	235	44	INCL	(F17,18)		OPP	O1	↑ 1B
		Output 1 C (96)		99	355	67	INCL	(F17,18,25)		OPP	O1	
		Output 2 B (89)		92	380	72	INCL	(F17,18,25)		OPP	O1	
		Output 1 E (112)		116	300	57	INCL	(F17,18,25)		OPP	O1	
		Output 2 C (104)		107	325	62	INCL	(F17,18,25)		OPP	O1	
	4250	Output 1 J (132)		136	260	49	INCL	(F17,18,25)		OPP	O1	
		Output 2 E (121)		124	280	53	INCL	(F17,18,25)		OPP	O1	↑ 1B
		Output 1 O (168)		173	200	38	INCL	(F17,18,25)		OPP	O1	
		Output 2 J (152)		157	220	42	INCL	(F17,18,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RT-11109A-AT **RT-12109A-AT** **RT-14109A-AT** **RT-9109A-AT**

FUL.41

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
						← CONTINUES						
	6800	Forward (55)		79	150	28	INCL	(F17,18)		BOTH	O1	 ↑ 1B
		Reverse (52)		74	150	28	INCL	(F17,18)		BOTH	O1	
	8000	Forward (40)		62	500	95	INCL	(F17,18)		BOTH	O1	 ↑ 1B
		Reverse (50)		73	500	95	INCL	(F17,18)		BOTH	O1	
	8500	B (57)		57	500	95	INCL	(F17,18)		OPP	O1	
		C (70)		75	485	92	INCL	(F17,18)		OPP	O1	
		E (86)		89	400	76	INCL	(F17,18)		OPP	O1	
		J (105)		111	325	62	INCL	(F17,18)		OPP	O1	 ↑ 1B
		O (127)		129	270	51	INCL	(F17,18)		OPP	O1	
		R (137)		141	250	47	INCL	(F17,18)		OPP	O1	
		S (150)		154	225	43	INCL	(F17,18)		OPP	O1	
		T (165)		170	210	40	INCL	(F17,18)		OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F17: Speeds shown are with transmission torque converter in lock up condition.

F18: This opening is not usable if transmission is equipped with optional low profile oil pan.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.




For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

RT-6609A **RT-7608LL** **RT-8609**

FUL.42

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		59	250	47	INCL	(F21)		OPP	01	 1R
		C (73)		79	250	47	INCL	(F21)		OPP	01	
		E (86)		94	225	43	INCL	(F21)		OPP	01	
		J (95)		103	225	43	INCL	(F21)		OPP	01	
		O (125)		135	195	37	INCL	(F21)		OPP	01	
		R (137)		148	180	34	INCL	(F21)		OPP	01	
		S (150)		162	162	31	INCL	(F21)		OPP	01	
		T (165)		178	148	28	INCL	(F21)		OPP	01	
3200		Z (40)		43	250	47	INCL	(F21)		OPP	01	 1R
		A (50)		54	250	47	INCL	(F21)		OPP	01	
		B (55)		59	250	47	INCL	(F21)		OPP	01	
		C (73)		79	250	47	INCL	(F21)		OPP	01	
		E (86)		95	225	43	INCL	(F21)		OPP	01	
		J (95)		103	225	43	INCL	(F21)		OPP	01	
		O (125)		135	195	37	INCL	(F21)		OPP	01	
		R (137)		148	180	34	INCL	(F21)		OPP	01	
		S (150)		162	162	31	INCL	(F21)		OPP	01	
		T (165)		178	148	28	INCL	(F21)		OPP	01	
6000		Forward (73)		79	150	28	INCL	(F21)		BOTH	01	 1R
		Reverse (83)		90	150	28	INCL	(F21)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RT-6609A **RT-7608LL** **RT-8609**

FUL.42

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		51	250	47	INCL	(F21)		OPP	O1	
		B (55)		59	250	47	INCL	(F21)		OPP	O1	
		C (73)		79	250	47	INCL	(F21)		OPP	O1	
		E (86)		94	225	43	INCL	(F21)		OPP	O1	
	2000	J (95)		103	225	43	INCL	(F21)		OPP	O1	
		O (125)		135	180	34	INCL	(F21)		OPP	O1	↑ 1B
		R (137)		148	170	32	INCL	(F21)		OPP	O1	
		S (150)		162	155	29	INCL	(F21)		OPP	O1	
		T (165)		178	140	27	INCL	(F21)		OPP	O1	
		Z (40)		43	250	47	INCL	(F21) CLUTCH SHIFT		OPP	O1	
		A (50)		54	250	47	INCL	(F21) CLUTCH SHIFT		OPP	O1	
		B (55)		59	250	47	INCL	(F21) CLUTCH SHIFT		OPP	O1	
		C (73)		79	250	47	INCL	(F21) CLUTCH SHIFT		OPP	O1	
		E (86)		95	225	43	INCL	(F21) CLUTCH SHIFT		OPP	O1	
	3800	J (95)		103	225	43	INCL	(F21) CLUTCH SHIFT		OPP	O1	
		O (125)		135	195	37	INCL	(F21) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		148	180	34	INCL	(F21) CLUTCH SHIFT		OPP	O1	
		S (150)		162	162	31	INCL	(F21) CLUTCH SHIFT		OPP	O1	
		T (165)		178	148	28	INCL	(F21) CLUTCH SHIFT		OPP	O1	
		B (57)		59	420	80	INCL	(F21)		OPP	O1	
		C (70)		72	350	66	INCL	(F21)		OPP	O1	
	4100	E (86)		89	285	54	INCL	(F21)		OPP	O1	
		J (105)		108	235	44	INCL	(F21)		OPP	O1	↑ 1B
		Output 1 C (96)		71	355	67	INCL	(F21,25)		OPP	O1	
		Output 2 B (89)		66	380	72	INCL	(F21,25)		OPP	O1	
		Output 1 E (112)		84	300	57	INCL	(F21,25)		OPP	O1	
		Output 2 C (104)		77	325	62	INCL	(F21,25)		OPP	O1	
	4250	Output 1 J (132)		98	260	49	INCL	(F21,25)		OPP	O1	
		Output 2 E (121)		90	280	53	INCL	(F21,25)		OPP	O1	↑ 1B
		Output 1 O (168)		125	200	38	INCL	(F21,25)		OPP	O1	
		Output 2 J (152)		113	220	42	INCL	(F21,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

RT-6609A **RT-7608LL** **RT-8609**

FUL.42

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		57	150	28	INCL	(F21)		BOTH	O1	 ↑ 1B
		Reverse (52)		54	150	28	INCL	(F21)		BOTH	O1	
	8000	Forward (40)		45	500	95	INCL	(F21)		BOTH	O1	 ↑ 1B
		Reverse (50)		53	500	95	INCL	(F21)		BOTH	O1	
	8500	B (57)		41	500	95	INCL	(F21)		OPP	O1	
		C (70)		54	485	92	INCL	(F21)		OPP	O1	
		E (86)		65	400	76	INCL	(F21)		OPP	O1	
		J (105)		80	325	62	INCL	(F21)		OPP	O1	 ↑ 1B
		O (127)		93	270	51	INCL	(F21)		OPP	O1	
		R (137)		102	250	47	INCL	(F21)		OPP	O1	
		S (150)		111	225	43	INCL	(F21)		OPP	O1	
		T (165)		123	210	40	INCL	(F21)		OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F21: The maximum allowable output torque for PTO operation on this transmission is 300 lb/ft per EATON.

F22: RT-7608LL: Adapter required for PTO clearance. Direct mount pumps interfere with transmission case.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		59	250	47	INCL	(F19,20,21)		OPP	01	
		C (73)		79	250	47	INCL	(F19,20,21)		OPP	01	
		E (86)		94	225	43	INCL	(F19,20,21)		OPP	01	
		J (95)		103	225	43	INCL	(F19,20,21)		OPP	01	 4R
		O (125)		135	195	37	INCL	(F19,20,21)		OPP	01	
		R (137)		148	180	34	INCL	(F19,20,21)		OPP	01	
		S (150)		162	162	31	INCL	(F19,20,21)		OPP	01	
		T (165)		178	148	28	INCL	(F19,20,21)		OPP	01	
	3200	Z (40)		43	250	47	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
		A (50)		54	250	47	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
		B (55)		59	250	47	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
		C (73)		79	250	47	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
		E (86)		95	225	43	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
		J (95)		103	225	43	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	 4R
		O (125)		135	195	37	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
		R (137)		148	180	34	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
		S (150)		162	162	31	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
		T (165)		178	148	28	INCL	(F19,20,21) CLUTCH SHIFT		OPP	1	
	6000	Forward (73)		79	150	28	INCL	(F19,21)		BOTH	01	 4R
		Reverse (83)		90	150	28	INCL	(F19,21)		BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		51	250	47	INCL	(F21)		OPP	01	
		B (55)		59	250	47	INCL	(F21)		OPP	01	
		C (73)		79	250	47	INCL	(F21)		OPP	01	
		E (86)		94	225	43	INCL	(F21)		OPP	01	
		J (95)		103	225	43	INCL	(F21)		OPP	01	 2B
		O (125)		135	180	34	INCL	(F21)		OPP	01	
		R (137)		148	170	32	INCL	(F21)		OPP	01	
		S (150)		162	155	29	INCL	(F21)		OPP	01	
		T (165)		178	140	27	INCL	(F21)		OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FUL.43


8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
		B (57)		41	500	95	INCL			OPP	01	
		C (70)		54	485	92	INCL			OPP	01	
		E (86)		65	400	76	INCL			OPP	01	
	8500	J (105)		80	325	62	INCL			OPP	01	
		O (127)		93	270	51	INCL			OPP	01	
		R (137)		102	250	47	INCL			OPP	01	
		S (150)		112	225	43	INCL			OPP	01	
		T (165)		123	210	40	INCL			OPP	01	




FUL.44

FO-10E310C-VAS
FO-12E310C-VAS
FO-14E309ALL-VMS
FO-14E310C-LAS/VAS
FO-14E313A-MHP
FO-14E318B-MXP/VXP
FO-16E309ALL-VMS
FO-16E310C-LAS/VAS
FO-16E313A-MHP
FO-16E313B-MHP
FO-16E318B-MXP/VXP
FO-18E310C-LAS
FO-18E313A-MHP
FO-18E318B-MXP/VXP
FO-20E313A-MHP
FO-20E318B-MXP/VXP
FO-22E318B-MXP/VXP
FO-6E318B-MXP
FOM-14E310C-LAS/VAS
FOM-15E310C-LAS/VAS
FOM-16E310C-LAS/VAS
RTLO-16913L-DM3
RTLOM-16913L-DM3

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
		B (55)		89	250	47	INCL	(F6,7,26,9)		OPP	01	
		C (73)		118	250	47	INCL	(F6,7,26,9)		OPP	01	
		E (86)		141	225	43	INCL	(F6,7,26,9)		OPP	01	
	1000	J (95)		154	225	43	INCL	(F6,7,26,9)		OPP	01	
		O (125)		202	195	37	INCL	(F6,7,26,9)		OPP	01	
		R (137)		221	180	34	INCL	(F6,7,26,9)		OPP	01	
		S (150)		242	162	31	INCL	(F6,7,26,9)		OPP	01	
		T (165)		267	148	28	INCL	(F6,7,26,9)		OPP	01	
		Z (40)		65	250	47	INCL	(F6,7,26,9)		OPP	01	
		A (50)		81	250	47	INCL	(F6,7,26,9)		OPP	01	
		B (55)		89	250	47	INCL	(F6,7,26,9)		OPP	01	
		C (73)		118	250	47	INCL	(F6,7,26,9)		OPP	01	
		E (86)		141	225	43	INCL	(F6,7,26,9)		OPP	01	
	3200	J (95)		155	225	43	INCL	(F6,7,26,9)		OPP	01	
		O (125)		202	195	37	INCL	(F6,7,26,9)		OPP	01	
		R (137)		221	180	34	INCL	(F6,7,26,9)		OPP	01	
		S (150)		242	162	31	INCL	(F6,7,26,9)		OPP	01	
		T (165)		266	148	28	INCL	(F6,7,26,9)		OPP	01	
	6000	FWD(73)		118	150	28	INCL	(F26,9)		BOTH	01	
		REV(83)		134	150	28	INCL	(F26,9)		BOTH	01	







For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FUL.44

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		81	250	47	INCL	(F11,23)		OPP	O1	
		B (55)		93	250	47	INCL	(F11,23)		OPP	O1	
		C (73)		123	250	47	INCL	(F11,23)		OPP	O1	
		E (86)		147	225	43	INCL	(F11,23)		OPP	O1	
	2000	J (95)		160	225	43	INCL	(F11,23)		OPP	O1	
		O (125)		211	180	34	INCL	(F11,23)		OPP	O1	↑ 1B
		R (137)		231	170	32	INCL	(F11,23)		OPP	O1	
		S (150)		253	155	29	INCL	(F11,23)		OPP	O1	
		T (165)		278	140	27	INCL	(F11,23)		OPP	O1	
		Z (40)		68	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		A (50)		84	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		B (55)		93	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		C (73)		123	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		E (86)		148	225	43	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
	3800	J (95)		161	225	43	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		O (125)		211	195	37	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		231	180	34	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		S (150)		253	162	31	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		T (165)		278	148	28	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		B (57)		92	420	80	INCL	(F11,12)		OPP	O1	
		C (70)		113	350	66	INCL	(F11,12)		OPP	O1	
	4100	E (86)		139	285	54	INCL	(F11,12)		OPP	O1	
		J (105)		170	235	44	INCL	(F11,12)		OPP	O1	↑ 1B
		Output 1 C (96)		112	355	67	INCL	(F11,12,25)		OPP	O1	
		Output 2 B (89)		104	380	72	INCL	(F11,12,25)		OPP	O1	
		Output 1 E (112)		131	300	57	INCL	(F11,12,25)		OPP	O1	
		Output 2 C (104)		120	325	62	INCL	(F11,12,25)		OPP	O1	
	4250	Output 1 J (132)		153	260	49	INCL	(F11,12,25)		OPP	O1	
		Output 2 E (121)		140	280	53	INCL	(F11,12,25)		OPP	O1	↑ 1B
		Output 1 O (168)		195	200	38	INCL	(F11,12,25)		OPP	O1	
		Output 2 J (152)		177	220	42	INCL	(F11,12,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FUL.44

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		89	150	28	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (52)		84	150	28	INCL	(F11)		BOTH	O1	
	8000	Forward (40)		70	500	95	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (50)		83	500	95	INCL	(F11)		BOTH	O1	
	8500	B (57)		64	500	95	INCL	(F11,23)		OPP	O1	
		C (70)		85	485	92	INCL	(F11,23)		OPP	O1	
		E (86)		101	400	76	INCL	(F11,23)		OPP	O1	
		J (105)		125	325	62	INCL	(F11,23)		OPP	O1	 ↑ 1B
		O (127)		145	270	51	INCL	(F11,23)		OPP	O1	
		R (137)			250	47	INCL	(F11,23)		OPP	O1	
		S (150)			225	43	INCL	(F11,23)		OPP	O1	
		T (165)			210	40	INCL	(F11,23)		OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing. The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F12: Possible internal transmission gear interference with 4000 Series "J" & "O" ratios and 4250 ratio O-J. Check Before installing PTO.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F23: Interference with adjacent gear in transmission for Ratios "O" and above on Right Side & Ratios "R" and above on Bottom.

F26: PTO must be wired through the transmission controller per Eaton instructions. See Eaton bulletin TRIG-2600 for interface with transmission.

F9: Engine Speed must be advanced to 1000 RPM for PTO operation. PTO will not activate below this speed.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.



F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FUL.45

RTAO-10710C-AC/AS
RTAO-12710C-AC/AS
RTAO-14710C-AC/AS
RTAO-16710C-AC/AS
RTLC-16609A/E
RTLC-16613A/E
RTLO-12713A
RTLO-12913A
RTLO-13118AMT
RTLO-14713A/A-T2
RTLO-14718B/B-T2
RTLO-14913A/A-T2
RTLO-14918A-AS2/S3
RTLO-14918B/B-AS/B-AS3/B-T2
RTLO-16713A/A-MT/A-T2
RTLO-16718B/B-T2
RTLO-16913-LHS-D
RTLO-16913-T2/A/A-T2/L-LHP
RTLO-16918A-AS2/-AS3
RTLO-16918B/B-AS/B-T2
RTLO-18718B/B-T2
RTLO-18913A/A-T2
RTLO-18918A-AS2/-AS3
RTLO-18918B/B-AS/B-T2
RTLO-20718B/B-T2
RTLO-20913A/A-AS2
RTLO-20918A-AS3
RTLO-20918B/B-AS/B-T2
RTLO-22918A/A-AS2/A-AS3
RTLO-22918B/B-AS
RTLOC-16909A/A-T2
RTLOC-18909A/A-T2
RTLOF-14718B
RTLOF-14918B
RTLOF-16718B
RTLOF-16918B
RTLOF-18718B,
RTLOF-18918B
RTLOF-20918B
RTLOF-22918B
RTLOFC-16909A/A-T2
RTLOM-16913L-LH
RTO-11609B/H
RTO-11709B/H/MLL
RTO-11710C
RTO-11909ALL/MLL
RTO-12609B/H
RTO-12709H
RTO-12710C
RTO-13609B/H
RTO-13709H
RTO-13710C
RTO-14609B/H
RTO-14610C
RTO-14709H/MLL
RTO-14710C/C-AS2
RTO-14909ALL/MLL
RTO-14910C/C-AS2/C-AS3
RTO-15710C
RTO-16709B/H
RTO-16710C&C-AS2
RTO-16909ALL
RTO-16910C-AS2/C-AS3
RTO-909B
RTO-9509B
RTOC-16709A
RTOC-16909A
RTOC-16913A
RTOC-18909A
RTOCM-16909A
RTOF-9509B
RTOO-11613
RTOO-14613
RTOO-9513
RTX-11609B
RTX-11709H
RTX-11710C
RTX-12609B
RTX-12709H
RTX-12710C
RTX-13609B
RTX-13709H
RTX-13710C
RTX-14609B
RTX-14709H
RTX-14710C
RTX-15710C
RTX-16709B/H
RTX-16710C

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		89	250	47	INCL	(F6,7,23)		OPP	01	
		C (73)		118	250	47	INCL	(F6,7,23)		OPP	01	
		E (86)		141	225	43	INCL	(F6,7,23)		OPP	01	
		J (95)		154	225	43	INCL	(F6,7,23)		OPP	01	
		O (125)		202	195	37	INCL	(F6,7,23)		OPP	01	
		R (137)		221	180	34	INCL	(F6,7,23)		OPP	01	
		S (150)		242	162	31	INCL	(F6,7,23)		OPP	01	
		T (165)		267	148	28	INCL	(F6,7,23)		OPP	01	
	3200	Z (40)		65	250	47	INCL	(F6,7,23)		OPP	01	
		A (50)		81	250	47	INCL	(F6,7,23)		OPP	01	
		B (55)		89	250	47	INCL	(F6,7,23)		OPP	01	
		C (73)		118	250	47	INCL	(F6,7,23)		OPP	01	
		E (86)		141	225	43	INCL	(F6,7,23)		OPP	01	
		J (95)		155	225	43	INCL	(F6,7,23)		OPP	01	
		O (125)		202	195	37	INCL	(F6,7,23)		OPP	01	
		R (137)		221	180	34	INCL	(F6,7,23)		OPP	01	
		S (150)		242	162	31	INCL	(F6,7,23)		OPP	01	
		T (165)		266	148	28	INCL	(F6,7,23)		OPP	01	
	6000	Forward (73)		118	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		134	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FUL.45

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		81	250	47	INCL	(F11,23)		OPP	O1	
		B (55)		93	250	47	INCL	(F11,23)		OPP	O1	
		C (73)		123	250	47	INCL	(F11,23)		OPP	O1	
		E (86)		147	225	43	INCL	(F11,23)		OPP	O1	
	2000	J (95)		160	225	43	INCL	(F11,23)		OPP	O1	
		O (125)		211	180	34	INCL	(F11,23)		OPP	O1	↑ 1B
		R (137)		231	170	32	INCL	(F11,23)		OPP	O1	
		S (150)		253	155	29	INCL	(F11,23)		OPP	O1	
		T (165)		278	140	27	INCL	(F11,23)		OPP	O1	
		Z (40)		68	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		A (50)		84	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		B (55)		93	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		C (73)		123	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		E (86)		148	225	43	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
	3800	J (95)		161	225	43	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		O (125)		211	195	37	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		231	180	34	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		S (150)		253	162	31	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		T (165)		278	148	28	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		B (57)		92	420	80	INCL	(F11,12)		OPP	O1	
		C (70)		113	350	66	INCL	(F11,12)		OPP	O1	
	4100	E (86)		139	285	54	INCL	(F11,12)		OPP	O1	
		J (105)		170	235	44	INCL	(F11,12)		OPP	O1	↑ 1B
		Output 1 C (96)		112	355	67	INCL	(F11,12,25)		OPP	O1	
		Output 2 B (89)		104	380	72	INCL	(F11,12,25)		OPP	O1	
		Output 1 E (112)		131	300	57	INCL	(F11,12,25)		OPP	O1	
		Output 2 C (104)		120	325	62	INCL	(F11,12,25)		OPP	O1	
	4250	Output 1 J (132)		153	260	49	INCL	(F11,12,25)		OPP	O1	
		Output 2 E (121)		140	280	53	INCL	(F11,12,25)		OPP	O1	↑ 1B
		Output 1 O (168)		195	200	38	INCL	(F11,12,25)		OPP	O1	
		Output 2 J (152)		177	220	42	INCL	(F11,12,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FUL.45

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		89	150	28	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (52)		84	150	28	INCL	(F11)		BOTH	O1	
	8000	Forward (40)		70	500	95	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (50)		83	500	95	INCL	(F11)		BOTH	O1	
	8500	B (57)		64	500	95	INCL	(F11,23)		OPP	O1	
		C (70)		85	485	92	INCL	(F11,23)		OPP	O1	
		E (86)		101	400	76	INCL	(F11,23)		OPP	O1	
		J (105)		125	325	62	INCL	(F11,23)		OPP	O1	 ↑ 1B
		O (127)		145	270	51	INCL	(F11,23)		OPP	O1	
		R (137)			250	47	INCL	(F11,23)		OPP	O1	
		S (150)			225	43	INCL	(F11,23)		OPP	O1	
		T (165)			210	40	INCL	(F11,23)		OPP	O1	

CAUTION:
Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing. The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above
DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F12: Possible internal transmission gear interference with 4000 Series "J" & "O" ratios and 4250 ratio O-J. Check Before installing PTO.

F17: Speeds shown are with transmission torque converter in lock up condition.

F18: This opening is not usable if transmission is equipped with optional low profile oil pan.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F23: Interference with adjacent gear in transmission for Ratios "O" and above on Right Side & Ratios "R" and above on Bottom.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.


F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FAO-11810C
FAO-12810C
FAO-13810C
FAO-14810C
FAO-15810C
FAO-16810C
FAOM-14810C
FAOM-15810C

FUL.46

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		89	250	47	INCL	(F6,7,23)		OPP	01	
		C (73)		118	250	47	INCL	(F6,7,23)		OPP	01	
		E (86)		141	225	43	INCL	(F6,7,23)		OPP	01	
		J (95)		154	225	43	INCL	(F6,7,23)		OPP	01	
		O (125)		202	195	37	INCL	(F6,7,23)		OPP	01	
		R (137)		221	180	34	INCL	(F6,7,23)		OPP	01	
		S (150)		242	162	31	INCL	(F6,7,23)		OPP	01	
		T (165)		267	148	28	INCL	(F6,7,23)		OPP	01	
	3200	Z (40)		65	250	47	INCL	(F6,7,23)		OPP	01	
		A (50)		81	250	47	INCL	(F6,7,23)		OPP	01	
		B (55)		89	250	47	INCL	(F6,7,23)		OPP	01	
		C (73)		118	250	47	INCL	(F6,7,23)		OPP	01	
		E (86)		141	225	43	INCL	(F6,7,23)		OPP	01	
		J (95)		155	225	43	INCL	(F6,7,23)		OPP	01	
		O (125)		202	195	37	INCL	(F6,7,23)		OPP	01	
		R (137)		221	180	34	INCL	(F6,7,23)		OPP	01	
		S (150)		242	162	31	INCL	(F6,7,23)		OPP	01	
		T (165)		266	148	28	INCL	(F6,7,23)		OPP	01	
	6000	Forward (73)		118	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		134	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FAO-11810C
FAO-12810C
FAO-13810C
FAO-14810C
FAO-15810C
FAO-16810C
FAOM-14810C
FAOM-15810C

FUL.46

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		81	250	47	INCL	(F11,23)		OPP	O1	 ↑ 1B
		B (55)		93	250	47	INCL	(F11,23)		OPP	O1	
		C (73)		123	250	47	INCL	(F11,23)		OPP	O1	
		E (86)		147	225	43	INCL	(F11,23)		OPP	O1	
		J (95)		160	225	43	INCL	(F11,23)		OPP	O1	
		O (125)		211	180	34	INCL	(F11,23)		OPP	O1	
		R (137)		231	170	32	INCL	(F11,23)		OPP	O1	
		S (150)		253	155	29	INCL	(F11,23)		OPP	O1	
		T (165)		278	140	27	INCL	(F11,23)		OPP	O1	
	3800	Z (40)		68	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	 ↑ 1B
		A (50)		84	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		B (55)		93	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		C (73)		123	250	47	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		E (86)		148	225	43	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		J (95)		161	225	43	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		O (125)		211	195	37	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		R (137)		231	180	34	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		S (150)		253	162	31	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
		T (165)		278	148	28	INCL	(F11,23) CLUTCH SHIFT		OPP	O1	
	4100	B (57)		92	420	80	INCL	(F11,12)		OPP	O1	 ↑ 1B
		C (70)		113	350	66	INCL	(F11,12)		OPP	O1	
		E (86)		139	285	54	INCL	(F11,12)		OPP	O1	
		J (105)		170	235	44	INCL	(F11,12)		OPP	O1	
	4250	Output 1 C (96)		112	355	67	INCL	(F11,12,25)		OPP	O1	 ↑ 1B
		Output 2 B (89)		104	380	72	INCL	(F11,12,25)		OPP	O1	
		Output 1 E (112)		131	300	57	INCL	(F11,12,25)		OPP	O1	
		Output 2 C (104)		120	325	62	INCL	(F11,12,25)		OPP	O1	
		Output 1 J (132)		153	260	49	INCL	(F11,12,25)		OPP	O1	
		Output 2 E (121)		140	280	53	INCL	(F11,12,25)		OPP	O1	
		Output 1 O (168)		195	200	38	INCL	(F11,12,25)		OPP	O1	
		Output 2 J (152)		177	220	42	INCL	(F11,12,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FAO-11810C
FAO-12810C
FAO-13810C
FAO-14810C
FAO-15810C
FAO-16810C
FAOM-14810C
FAOM-15810C

FUL.46

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		89	150	28	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (52)		84	150	28	INCL	(F11)		BOTH	O1	
	8000	Forward (40)		70	500	95	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (50)		83	500	95	INCL	(F11)		BOTH	O1	
	8500	B (57)		64	500	95	INCL	(F11,23)		OPP	O1	
		C (70)		85	485	92	INCL	(F11,23)		OPP	O1	
		E (86)		101	400	76	INCL	(F11,23)		OPP	O1	
		J (105)		125	325	62	INCL	(F11,23)		OPP	O1	 ↑ 1B
		O (127)		145	270	51	INCL	(F11,23)		OPP	O1	
		R (137)			250	47	INCL	(F11,23)		OPP	O1	
		S (150)			225	43	INCL	(F11,23)		OPP	O1	
		T (165)			210	40	INCL	(F11,23)		OPP	O1	

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F12: Possible internal transmission gear interference with 4000 Series "J" & "O" ratios and 4250 ratio O-J. Check Before installing PTO.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F23: Interference with adjacent gear in transmission for Ratios "O" and above on Right Side & Ratios "R" and above on Bottom.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference, use adapter AD645-01.

Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)



Eaton Fuller

RTO-11109B-AT
RTO-12109B-AT

RTO-13109B-AT
RTO-14109B-AT

RTO-16109B-AT
RTO-9109B-AT

FUL.47

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		89	250	47	INCL	(F6,17)		OPP	01	
		C (73)		118	250	47	INCL	(F6,17)		OPP	01	
		E (86)		141	225	43	INCL	(F6,17)		OPP	01	
		J (95)		154	225	43	INCL	(F6,17)		OPP	01	 1R
	1000	O (125)		202	195	37	INCL	(F6,17)		OPP	01	
		R (137)		221	180	34	INCL	(F6,17)		OPP	01	
		S (150)		242	162	31	INCL	(F6,17)		OPP	01	
		T (165)		267	148	28	INCL	(F6,17)		OPP	01	
		Z (40)		65	250	47	INCL	(F6,17)		OPP	01	
		A (50)		81	250	47	INCL	(F6,17)		OPP	01	
		B (55)		89	250	47	INCL	(F6,17)		OPP	01	
		C (73)		118	250	47	INCL	(F6,17)		OPP	01	
		E (86)		141	225	43	INCL	(F6,17)		OPP	01	 1R
	3200	J (95)		155	225	43	INCL	(F6,17)		OPP	01	
		O (125)		202	195	37	INCL	(F6,17)		OPP	01	
		R (137)		221	180	34	INCL	(F6,17)		OPP	01	
		S (150)		242	162	31	INCL	(F6,17)		OPP	01	
		T (165)		266	148	28	INCL	(F6,17)		OPP	01	
	6000	Forward (73)		118	150	28	INCL	(F17)		BOTH	01	 1R
		Reverse (83)		134	150	28	INCL	(F17)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

RTO-11109B-AT
RTO-12109B-AT

RTO-13109B-AT
RTO-14109B-AT

RTO-16109B-AT
RTO-9109B-AT

FUL.47

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		79	250	47	INCL	(F17,18)		OPP	O1	
		B (55)		93	250	47	INCL	(F17,18)		OPP	O1	
		C (73)		123	250	47	INCL	(F17,18)		OPP	O1	
		E (86)		147	225	43	INCL	(F17,18)		OPP	O1	
	2000	J (95)		160	225	43	INCL	(F17,18)		OPP	O1	
		O (125)		211	180	34	INCL	(F17,18)		OPP	O1	
		R (137)		231	170	32	INCL	(F17,18)		OPP	O1	
		S (150)		253	155	29	INCL	(F17,18)		OPP	O1	
		T (165)		278	140	27	INCL	(F17,18)		OPP	O1	
		Z (40)		68	250	47	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		A (50)		84	250	47	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		B (55)		93	250	47	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		C (73)		123	250	47	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
	3800	E (86)		148	225	43	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		J (95)		161	225	43	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		O (125)		211	195	37	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		R (137)		231	180	34	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		S (150)		253	162	31	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		T (165)		278	148	28	INCL	(F17,18) CLUTCH SHIFT		OPP	O1	
		B (57)		92	420	80	INCL	(F17,18)		OPP	O1	
	4100	C (70)		113	350	66	INCL	(F17,18)		OPP	O1	
		E (86)		139	285	54	INCL	(F17,18)		OPP	O1	
		J (105)		170	235	44	INCL	(F17,18)		OPP	O1	
		Output 1 C (96)		112	355	67	INCL	(F17,18,25)		OPP	O1	
		Output 2 B (89)		104	380	72	INCL	(F17,18,25)		OPP	O1	
		Output 1 E (112)		131	300	57	INCL	(F17,18,25)		OPP	O1	
	4250	Output 2 C (104)		120	325	62	INCL	(F17,18,25)		OPP	O1	
		Output 1 J (132)		153	260	49	INCL	(F17,18,25)		OPP	O1	
		Output 2 E (121)		140	280	53	INCL	(F17,18,25)		OPP	O1	
		Output 1 O (168)		195	200	38	INCL	(F17,18,25)		OPP	O1	
		Output 2 J (152)		177	220	42	INCL	(F17,18,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTO-11109B-AT
RTO-12109B-AT

RTO-13109B-AT
RTO-14109B-AT

RTO-16109B-AT
RTO-9109B-AT

FUL.47

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		89	150	28	INCL	(F17,18)		BOTH	O1	 ↑ 1B
		Reverse (52)		84	150	28	INCL	(F17,18)		BOTH	O1	
	8000	Forward (40)		70	500	95	INCL	(F17,18)		BOTH	O1	 ↑ 1B
		Reverse (50)		83	500	95	INCL	(F17,18)		BOTH	O1	
	8500	B (57)		64	500	95	INCL	(F17,18)		OPP	O1	
		C (70)		85	485	92	INCL	(F17,18)		OPP	O1	
		E (86)		101	400	76	INCL	(F17,18)		OPP	O1	
		J (105)		125	325	62	INCL	(F17,18)		OPP	O1	 ↑ 1B
		O (127)		145	270	51	INCL	(F17,18)		OPP	O1	
		R (137)		159	250	47	INCL	(F17,18)		OPP	O1	
		S (150)		174	225	43	INCL	(F17,18)		OPP	O1	
		T (165)		191	210	40	INCL	(F17,18)		OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing. The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F17: Speeds shown are with transmission torque converter in lock up condition.

F18: This opening is not usable if transmission is equipped with optional low profile oil pan.




F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RTO-1157DL/DLL TO-11605D TO-905A/D TO-955AL/ALL/DLL **FUL.48**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		92	250	47	INCL	(F6,7)		OPP	01	
		C (73)		122	250	47	INCL	(F6,7)		OPP	01	
		E (86)		146	225	43	INCL	(F6,7)		OPP	01	
		J (95)		159	225	43	INCL	(F6,7)		OPP	01	
		O (125)		210	195	37	INCL	(F6,7)		OPP	01	
		R (137)		230	180	34	INCL	(F6,7)		OPP	01	
		S (150)		252	162	31	INCL	(F6,7)		OPP	01	
		T (165)		277	148	28	INCL	(F6,7)		OPP	01	
	3200	Z (40)		67	250	47	INCL	(F6,7)		OPP	01	
		A (50)		84	250	47	INCL	(F6,7)		OPP	01	
		B (55)		92	250	47	INCL	(F6,7)		OPP	01	
		C (73)		122	250	47	INCL	(F6,7)		OPP	01	
		E (86)		147	225	43	INCL	(F6,7)		OPP	01	
		J (95)		160	225	43	INCL	(F6,7)		OPP	01	
		O (125)		210	195	37	INCL	(F6,7)		OPP	01	
		R (137)		230	180	34	INCL	(F6,7)		OPP	01	
		S (150)		252	162	31	INCL	(F6,7)		OPP	01	
		T (165)		276	148	28	INCL	(F6,7)		OPP	01	
	6000	Forward (73)		122	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		139	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		84	250	47	INCL			OPP	O1	 ↑ 1B
		B (55)		96	250	47	INCL			OPP	O1	
		C (73)		128	250	47	INCL			OPP	O1	
		E (86)		152	225	43	INCL			OPP	O1	
		J (95)		166	225	43	INCL			OPP	O1	
		O (125)		219	180	34	INCL			OPP	O1	
		R (137)		240	170	32	INCL			OPP	O1	
		S (150)		263	155	29	INCL			OPP	O1	
		T (165)		289	140	27	INCL			OPP	O1	
	3800	Z (40)		70	250	47	INCL	CLUTCH SHIFT		OPP	O1	 ↑ 1B
		A (50)		88	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		B (55)		96	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		C (73)		128	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		E (86)		153	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		J (95)		168	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		O (125)		219	195	37	INCL	CLUTCH SHIFT		OPP	O1	
		R (137)		240	180	34	INCL	CLUTCH SHIFT		OPP	O1	
		S (150)		263	162	31	INCL	CLUTCH SHIFT		OPP	O1	
		T (165)		289	148	28	INCL	CLUTCH SHIFT		OPP	O1	
	4100	B (57)		96	420	80	INCL			OPP	O1	 ↑ 1B
		C (70)		117	350	66	INCL			OPP	O1	
		E (86)		144	285	54	INCL			OPP	O1	
		J (105)		176	235	44	INCL			OPP	O1	
	4250	Output 1 C (96)		116	355	67	INCL	(F25)		OPP	O1	 ↑ 1B
		Output 2 B (89)		108	380	72	INCL	(F25)		OPP	O1	
		Output 1 E (112)		135	300	57	INCL	(F25)		OPP	O1	
		Output 2 C (104)		125	325	62	INCL	(F25)		OPP	O1	
		Output 1 J (132)		159	260	49	INCL	(F25)		OPP	O1	
		Output 2 E (121)		146	280	53	INCL	(F25)		OPP	O1	
		Output 1 O (168)		203	200	38	INCL	(F25)		OPP	O1	
		Output 2 J (152)		184	220	42	INCL	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

RTO-1157DL/DLL **TO-11605D** **TO-905A/D** **TO-955AL/ALL/DLL** **FUL.48**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)	92	150	28	INCL				BOTH	O1	 ↑ 1B
		Reverse (52)	87	150	28	INCL				BOTH	O1	
	8000	Forward (40)	72	500	95	INCL				BOTH	O1	 ↑ 1B
		Reverse (50)	86	500	95	INCL				BOTH	O1	
	8500	B (57)	66	500	95	INCL				OPP	O1	
		C (70)	88	485	92	INCL				OPP	O1	
		E (86)	105	400	76	INCL				OPP	O1	
		J (105)	130	325	62	INCL				OPP	O1	 ↑ 1B
		O (127)	151	270	51	INCL				OPP	O1	
		R (137)	165	250	47	INCL				OPP	O1	
		S (150)	181	225	43	INCL				OPP	O1	
		T (165)	199	210	40	INCL				OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTO-11607L/LL **RTO-11707DLL** **RTO-11707LL** **RTO-13707DLL/MLL** **TO-11605A**

FUL.49

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		93	250	47	INCL	(F6,7)		OPP	01	
		C (73)		124	250	47	INCL	(F6,7)		OPP	01	
		E (86)		147	225	43	INCL	(F6,7)		OPP	01	
		J (95)		161	225	43	INCL	(F6,7)		OPP	01	
		O (125)		212	195	37	INCL	(F6,7)		OPP	01	
		R (137)		232	180	34	INCL	(F6,7)		OPP	01	
		S (150)		254	162	31	INCL	(F6,7)		OPP	01	
		T (165)		279	148	28	INCL	(F6,7)		OPP	01	
3200		Z (40)		68	250	47	INCL	(F6,7)		OPP	01	
		A (50)		85	250	47	INCL	(F6,7)		OPP	01	
		B (55)		93	250	47	INCL	(F6,7)		OPP	01	
		C (73)		124	250	47	INCL	(F6,7)		OPP	01	
		E (86)		148	225	43	INCL	(F6,7)		OPP	01	
		J (95)		162	225	43	INCL	(F6,7)		OPP	01	
		O (125)		212	195	37	INCL	(F6,7)		OPP	01	
		R (137)		232	180	34	INCL	(F6,7)		OPP	01	
		S (150)		254	162	31	INCL	(F6,7)		OPP	01	
		T (165)		279	148	28	INCL	(F6,7)		OPP	01	
6000		Forward (73)		124	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		141	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

RTO-11607L/LL RTO-11707DLL RTO-11707LL RTO-13707DLL/MLL TO-11605A **FUL.49**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		84	250	47	INCL			OPP	O1	 ↑ 1B
		B (55)		97	250	47	INCL			OPP	O1	
		C (73)		129	250	47	INCL			OPP	O1	
		E (86)		154	225	43	INCL			OPP	O1	
		J (95)		168	225	43	INCL			OPP	O1	
		O (125)		221	180	34	INCL			OPP	O1	
		R (137)		242	170	32	INCL			OPP	O1	
		S (150)		265	155	29	INCL			OPP	O1	
		T (165)		292	140	27	INCL			OPP	O1	
	3800	Z (40)		71	250	47	INCL	CLUTCH SHIFT		OPP	O1	 ↑ 1B
		A (50)		88	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		B (55)		97	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		C (73)		129	250	47	INCL	CLUTCH SHIFT		OPP	O1	
		E (86)		155	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		J (95)		169	225	43	INCL	CLUTCH SHIFT		OPP	O1	
		O (125)		221	195	37	INCL	CLUTCH SHIFT		OPP	O1	
		R (137)		242	180	34	INCL	CLUTCH SHIFT		OPP	O1	
		S (150)		265	162	31	INCL	CLUTCH SHIFT		OPP	O1	
		T (165)		291	148	28	INCL	CLUTCH SHIFT		OPP	O1	
	4100	B (57)		96	420	80	INCL			OPP	O1	 ↑ 1B
		C (70)		118	350	66	INCL			OPP	O1	
		E (86)		146	285	54	INCL			OPP	O1	
		J (105)		178	235	44	INCL			OPP	O1	
	4250	Output 1 C (96)		117	355	67	INCL	(F25)		OPP	O1	 ↑ 1B
		Output 2 B (89)		109	380	72	INCL	(F25)		OPP	O1	
		Output 1 E (112)		137	300	57	INCL	(F25)		OPP	O1	
		Output 2 C (104)		126	325	62	INCL	(F25)		OPP	O1	
		Output 1 J (132)		160	260	49	INCL	(F25)		OPP	O1	
		Output 2 E (121)		147	280	53	INCL	(F25)		OPP	O1	
		Output 1 O (168)		205	200	38	INCL	(F25)		OPP	O1	
		Output 2 J (152)		185	220	42	INCL	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTO-11607L/LL **RTO-11707DLL** **RTO-11707LL** **RTO-13707DLL/MLL** **TO-11605A**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		93	150	28	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		88	150	28	INCL			BOTH	O1	
	8000	Forward (40)		73	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		87	500	95	INCL			BOTH	O1	
	8500	B (57)		67	500	95	INCL			OPP	O1	
		C (70)		89	485	92	INCL			OPP	O1	
		E (86)		106	400	76	INCL			OPP	O1	
		J (105)		131	325	62	INCL			OPP	O1	 ↑ 1B
		O (127)		152	270	51	INCL			OPP	O1	
		R (137)		167	250	47	INCL			OPP	O1	
		S (150)		182	225	43	INCL			OPP	O1	
		T (165)		201	210	40	INCL			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.



F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FRO-11210C
FRO-12210C
FRO-13210C
FRO-14210C
FRO-15210C
FRO-16210C
FRO-17210C
FRO-18210C
RTO-11210C
RTO-11210R
RTO-12210C
RTO-12210R
RTO-13210C
RTO-13210R
RTO-14210C
RTO-14210R
RTO-15210C
RTO-16210C

FUL.50

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		94	250	47	M1	(F6)		OPP	01	
		C (73)		125	250	47	M1	(F6)		OPP	01	
		E (86)		149	225	43	M1	(F6)		OPP	01	
		J (95)		163	225	43	M1	(F6)		OPP	01	 1R
		O (125)		215	195	37	M1	(F6)		OPP	01	
		R (137)		235	180	34	M1	(F6)		OPP	01	
		S (150)		258	162	31	M1	(F6)		OPP	01	
		T (165)		284	148	28	M1	(F6)		OPP	01	
	3200	Z (40)		69	250	47	M1	(F6)		OPP	01	
		A (50)		86	250	47	M1	(F6)		OPP	01	
		B (55)		94	250	47	M1	(F6)		OPP	01	
		C (73)		125	250	47	M1	(F6)		OPP	01	
		E (86)		150	225	43	M1	(F6)		OPP	01	 1R
		J (95)		164	225	43	M1	(F6)		OPP	01	
		O (125)		215	195	37	M1	(F6)		OPP	01	
		R (137)		235	180	34	M1	(F6)		OPP	01	
		S (150)		258	162	31	M1	(F6)		OPP	01	
		T (165)		283	148	28	M1	(F6)		OPP	01	
	6000	Forward (73)		125	150	28	M1			BOTH	01	 1R
		Reverse (83)		143	150	28	M1			BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FUL.50

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		93	250	47	M2			OPP	O1	
		B (55)		99	250	47	M2			OPP	O1	
		C (73)		131	250	47	M2			OPP	O1	
		E (86)		156	225	43	M2			OPP	O1	
	2000	J (95)		170	225	43	M2			OPP	O1	
		O (125)		224	180	34	M2			OPP	O1	↑ 1B
		R (137)		246	170	32	M2			OPP	O1	
		S (150)		269	155	29	M2			OPP	O1	
		T (165)		296	140	27	M2			OPP	O1	
		Z (40)		72	250	47	M2	CLUTCH SHIFT		OPP	O1	
		A (50)		90	250	47	M2	CLUTCH SHIFT		OPP	O1	
		B (55)		99	250	47	M2	CLUTCH SHIFT		OPP	O1	
		C (73)		131	250	47	M2	CLUTCH SHIFT		OPP	O1	
		E (86)		157	225	43	M2	CLUTCH SHIFT		OPP	O1	
	3800	J (95)		172	225	43	M2	CLUTCH SHIFT		OPP	O1	
		O (125)		224	195	37	M2	CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		246	180	34	M2	CLUTCH SHIFT		OPP	O1	
		S (150)		269	162	31	M2	CLUTCH SHIFT		OPP	O1	
		T (165)		296	148	28	M2	CLUTCH SHIFT		OPP	O1	
		B (57)		98	420	80	M2			OPP	O1	
		C (70)		120	350	66	M2			OPP	O1	
	4100	E (86)		148	285	54	M2			OPP	O1	
		J (105)		180	235	44	M2			OPP	O1	↑ 1B
		Output 1 C (96)		119	355	67	M2	(F25)		OPP	O1	
		Output 2 B (89)		110	380	72	M2	(F25)		OPP	O1	
		Output 1 E (112)		139	300	57	M2	(F25)		OPP	O1	
		Output 2 C (104)		128	325	62	M2	(F25)		OPP	O1	
	4250	Output 1 J (132)		163	260	49	M2	(F25)		OPP	O1	
		Output 2 E (121)		149	280	53	M2	(F25)		OPP	O1	↑ 1B
		Output 1 O (168)		208	200	38	M2	(F25)		OPP	O1	
		Output 2 J (152)		188	220	42	M2	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FUL.50

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)	94		150	28	M2			BOTH	O1	 ↑ 1B
		Reverse (52)	89		150	28	M2			BOTH	O1	
	8000	Forward (40)	74		500	95	M2			BOTH	O1	 ↑ 1B
		Reverse (50)	88		500	95	M2			BOTH	O1	
	8500	B (57)	68		500	95	M2			OPP	O1	
		C (70)	90		485	92	M2			OPP	O1	
		E (86)	107		400	76	M2			OPP	O1	
		J (105)	133		325	62	M2			OPP	O1	 ↑ 1B
		O (127)	154		270	51	M2			OPP	O1	
		R (137)	169		250	47	M2			OPP	O1	
		S (150)	185		225	43	M2			OPP	O1	
		T (165)	204		210	40	M2			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTO-910 **RTO-915** **RTOF-910** **RTOF-915**

FUL.51

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		97	250	47	INCL	(F6,7)		OPP	01	
		C (73)		129	250	47	INCL	(F6,7)		OPP	01	
		E (86)		154	225	43	INCL	(F6,7)		OPP	01	
		J (95)		168	225	43	INCL	(F6,7)		OPP	01	
	1000	O (125)		221	195	37	INCL	(F6,7)		OPP	01	
		R (137)		242	180	34	INCL	(F6,7)		OPP	01	
		S (150)		265	162	31	INCL	(F6,7)		OPP	01	
		T (165)		292	148	28	INCL	(F6,7)		OPP	01	
		Z (40)		71	250	47	INCL	(F6,7)		OPP	01	
		A (50)		88	250	47	INCL	(F6,7)		OPP	01	
		B (55)		97	250	47	INCL	(F6,7)		OPP	01	
		C (73)		129	250	47	INCL	(F6,7)		OPP	01	
		E (86)		155	225	43	INCL	(F6,7)		OPP	01	
	3200	J (95)		169	225	43	INCL	(F6,7)		OPP	01	
		O (125)		221	195	37	INCL	(F6,7)		OPP	01	
		R (137)		242	180	34	INCL	(F6,7)		OPP	01	
		S (150)		265	162	31	INCL	(F6,7)		OPP	01	
		T (165)		291	148	28	INCL	(F6,7)		OPP	01	
	6000	Forward (73)		129	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		147	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RTO-910 **RTO-915** **RTOF-910** **RTOF-915**

FUL.51

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		88	250	47	INCL	(F11)		OPP	O1	
		B (55)		102	250	47	INCL	(F11)		OPP	O1	
		C (73)		135	250	47	INCL	(F11)		OPP	O1	
		E (86)		161	225	43	INCL	(F11)		OPP	O1	
	2000	J (95)		176	225	43	INCL	(F11)		OPP	O1	
		O (125)		231	180	34	INCL	(F11)		OPP	O1	↑ 1B
		R (137)		253	170	32	INCL	(F11)		OPP	O1	
		S (150)		277	155	29	INCL	(F11)		OPP	O1	
		T (165)		305	140	27	INCL	(F11)		OPP	O1	
		Z (40)		74	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		A (50)		92	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (55)		102	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		C (73)		135	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		E (86)		162	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
	3800	J (95)		177	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		O (125)		231	195	37	INCL	(F11) CLUTCH SHIFT		OPP	O1	↑ 1B
		R (137)		253	180	34	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		S (150)		277	162	31	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		T (165)		304	148	28	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (57)		101	420	80	INCL	(F11)		OPP	O1	
		C (70)		124	350	66	INCL	(F11)		OPP	O1	
	4100	E (86)		152	285	54	INCL	(F11)		OPP	O1	
		J (105)		186	235	44	INCL	(F11)		OPP	O1	↑ 1B
		Output 1 C (96)		122	355	67	INCL	(F11,25)		OPP	O1	
		Output 2 B (89)		113	380	72	INCL	(F11,25)		OPP	O1	
		Output 1 E (112)		143	300	57	INCL	(F11,25)		OPP	O1	
		Output 2 C (104)		132	325	62	INCL	(F11,25)		OPP	O1	
	4250	Output 1 J (132)		167	260	49	INCL	(F11,25)		OPP	O1	
		Output 2 E (121)		154	280	53	INCL	(F11,25)		OPP	O1	↑ 1B
		Output 1 O (168)		214	200	38	INCL	(F11,25)		OPP	O1	
		Output 2 J (152)		194	220	42	INCL	(F11,25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTO-910 **RTO-915** **RTOF-910** **RTOF-915**

FUL.51

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
						← CONTINUES						
	6800	Forward (55)	97	150	28	INCL		(F11)		BOTH	O1	 ↑ 1B
		Reverse (52)	92	150	28	INCL		(F11)		BOTH	O1	
	8000	Forward (40)	76	500	95	INCL		(F11)		BOTH	O1	 ↑ 1B
		Reverse (50)	91	500	95	INCL		(F11)		BOTH	O1	
	8500	B (57)	70	500	95	INCL		(F11)		OPP	O1	
		C (70)	93	485	92	INCL		(F11)		OPP	O1	
		E (86)	111	400	76	INCL		(F11)		OPP	O1	
		J (105)	137	325	62	INCL		(F11)		OPP	O1	 ↑ 1B
		O (127)	159	270	51	INCL		(F11)		OPP	O1	
		R (137)	174	250	47	INCL		(F11)		OPP	O1	
		S (150)	191	225	43	INCL		(F11)		OPP	O1	
		T (165)	210	210	40	INCL		(F11)		OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.




F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FRO-11210B
FRO-12210B
FRO-13210B
FRO-14210B
FRO-15210B
FRO-16210B
FRO-9210B
RTO-11209B/H
RTO-11210B
RTO-12209B/H
RTO-12210B
RTO-13209B/H
RTO-13210B
RTO-14209B/H
RTO-14210B
RTO-15210B
RTO-16210B

FUL.52

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		98	250	47	M1	(F6)		OPP	01	 1R
		C (73)		130	250	47	M1	(F6)		OPP	01	
		E (86)		155	225	43	M1	(F6)		OPP	01	
		J (95)		169	225	43	M1	(F6)		OPP	01	
		O (125)		222	195	37	M1	(F6)		OPP	01	
		R (137)		244	180	34	M1	(F6)		OPP	01	
		S (150)		267	162	31	M1	(F6)		OPP	01	
		T (165)		294	148	28	M1	(F6)		OPP	01	
3200		Z (40)		71	250	47	M1	(F6)		OPP	01	 1R
		A (50)		89	250	47	M1	(F6)		OPP	01	
		B (55)		98	250	47	M1	(F6)		OPP	01	
		C (73)		130	250	47	M1	(F6)		OPP	01	
		E (86)		156	225	43	M1	(F6)		OPP	01	
		J (95)		170	225	43	M1	(F6)		OPP	01	
		O (125)		222	195	37	M1	(F6)		OPP	01	
		R (137)		244	180	34	M1	(F6)		OPP	01	
		S (150)		267	162	31	M1	(F6)		OPP	01	
		T (165)		293	148	28	M1	(F6)		OPP	01	
6000		Forward (73)		130	150	28	M1			BOTH	01	 1R
		Reverse (83)		148	150	28	M1			BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FUL.52

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		88	250	47	M2			OPP	O1	 ↑ 1B
		B (55)		102	250	47	M2			OPP	O1	
		C (73)		136	250	47	M2			OPP	O1	
		E (86)		162	225	43	M2			OPP	O1	
		J (95)		177	225	43	M2			OPP	O1	
		O (125)		232	180	34	M2			OPP	O1	
		R (137)		255	170	32	M2			OPP	O1	
		S (150)		279	155	29	M2			OPP	O1	
		T (165)		307	140	27	M2			OPP	O1	
	3800	Z (40)		74	250	47	M2	CLUTCH SHIFT		OPP	O1	 ↑ 1B
		A (50)		93	250	47	M2	CLUTCH SHIFT		OPP	O1	
		B (55)		102	250	47	M2	CLUTCH SHIFT		OPP	O1	
		C (73)		136	250	47	M2	CLUTCH SHIFT		OPP	O1	
		E (86)		163	225	43	M2	CLUTCH SHIFT		OPP	O1	
		J (95)		178	225	43	M2	CLUTCH SHIFT		OPP	O1	
		O (125)		232	195	37	M2	CLUTCH SHIFT		OPP	O1	
		R (137)		254	180	34	M2	CLUTCH SHIFT		OPP	O1	
		S (150)		279	162	31	M2	CLUTCH SHIFT		OPP	O1	
		T (165)		306	148	28	M2	CLUTCH SHIFT		OPP	O1	
	4100	B (57)		101	420	80	M2			OPP	O1	 ↑ 1B
		C (70)		124	350	66	M2			OPP	O1	
		E (86)		153	285	54	M2			OPP	O1	
		J (105)		187	235	44	M2			OPP	O1	
	4250	Output 1 C (96)		123	355	67	M2	(F25)		OPP	O1	 ↑ 1B
		Output 2 B (89)		114	380	72	M2	(F25)		OPP	O1	
		Output 1 E (112)		144	300	57	M2	(F25)		OPP	O1	
		Output 2 C (104)		133	325	62	M2	(F25)		OPP	O1	
		Output 1 J (132)		168	260	49	M2	(F25)		OPP	O1	
		Output 2 E (121)		154	280	53	M2	(F25)		OPP	O1	
		Output 1 O (168)		215	200	38	M2	(F25)		OPP	O1	
		Output 2 J (152)		195	220	42	M2	(F25)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FUL.52

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)	98		150	28	M2			BOTH	O1	
		Reverse (52)	92		150	28	M2			BOTH	O1	↑ 1B
	8000	Forward (40)	77		500	95	M2			BOTH	O1	
		Reverse (50)	91		500	95	M2			BOTH	O1	↑ 1B
	8500	B (57)	70		500	95	M2			OPP	O1	
		C (70)	93		485	92	M2			OPP	O1	
		E (86)	111		400	76	M2			OPP	O1	
		J (105)	138		325	62	M2			OPP	O1	
		O (127)	160		270	51	M2			OPP	O1	↑ 1B
		R (137)	175		250	47	M2			OPP	O1	
		S (150)	192		225	43	M2			OPP	O1	
		T (165)	211		210	40	M2			OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.



F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTO-1110
RTO-11610
RTO-11615
RTO-11715
RTO-12510
RTO-12515
RTO-12610
RTO-14610
RTO-14615
RTO-14715
RTO-14915
RTO-15615
RTO-15715
RTO-16715
RTO-16915
RTX-14715
RTX-15715

FUL.53

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		100	250	47	INCL	(F6,7)		OPP	01	
		C (73)		133	250	47	INCL	(F6,7)		OPP	01	
		E (86)		158	225	43	INCL	(F6,7)		OPP	01	
		J (95)		173	225	43	INCL	(F6,7)		OPP	01	
	1000	O (125)		227	195	37	INCL	(F6,7)		OPP	01	
		R (137)		249	180	34	INCL	(F6,7)		OPP	01	
		S (150)		272	162	31	INCL	(F6,7)		OPP	01	
		T (165)		300	148	28	INCL	(F6,7)		OPP	01	
		Z (40)		73	250	47	INCL	(F6,7)		OPP	01	
		A (50)		91	250	47	INCL	(F6,7)		OPP	01	
		B (55)		100	250	47	INCL	(F6,7)		OPP	01	
		C (73)		133	250	47	INCL	(F6,7)		OPP	01	
		E (86)		159	225	43	INCL	(F6,7)		OPP	01	
	3200	J (95)		174	225	43	INCL	(F6,7)		OPP	01	
		O (125)		227	195	37	INCL	(F6,7)		OPP	01	
		R (137)		249	180	34	INCL	(F6,7)		OPP	01	
		S (150)		272	162	31	INCL	(F6,7)		OPP	01	
		T (165)		299	148	28	INCL	(F6,7)		OPP	01	
	6000	Forward (73)		133	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		151	150	28	INCL	(F7)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FUL.53

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		91	250	47	INCL	(F11)		OPP	O1	
		B (55)		104	250	47	INCL	(F11)		OPP	O1	
		C (73)		138	250	47	INCL	(F11)		OPP	O1	
		E (86)		165	225	43	INCL	(F11)		OPP	O1	
		J (95)		180	225	43	INCL	(F11)		OPP	O1	
		O (125)		237	180	34	INCL	(F11)		OPP	O1	
		R (137)		260	170	32	INCL	(F11)		OPP	O1	
		S (150)		285	155	29	INCL	(F11)		OPP	O1	
		T (165)		313	140	27	INCL	(F11)		OPP	O1	
	3800	Z (40)		76	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		A (50)		95	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		B (55)		104	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		C (73)		138	250	47	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		E (86)		166	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		J (95)		181	225	43	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		O (125)		237	195	37	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		R (137)		260	180	34	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		S (150)		285	162	31	INCL	(F11) CLUTCH SHIFT		OPP	O1	
		T (165)		312	148	28	INCL	(F11) CLUTCH SHIFT		OPP	O1	
	4100	B (57)		103	420	80	INCL	(F11)		OPP	O1	
		C (70)		127	350	66	INCL	(F11)		OPP	O1	
		E (86)		156	285	54	INCL	(F11)		OPP	O1	
		J (105)		191	235	44	INCL	(F11)		OPP	O1	
	4250	Output 1 C (96)		125	355	67	INCL	(F11,25)		OPP	O1	
		Output 2 B (89)		116	380	72	INCL	(F11,25)		OPP	O1	
		Output 1 E (112)		147	300	57	INCL	(F11,25)		OPP	O1	
		Output 2 C (104)		135	325	62	INCL	(F11,25)		OPP	O1	
		Output 1 J (132)		172	260	49	INCL	(F11,25)		OPP	O1	
		Output 2 E (121)		158	280	53	INCL	(F11,25)		OPP	O1	
		Output 1 O (168)		220	200	38	INCL	(F11,25)		OPP	O1	
		Output 2 J (152)		199	220	42	INCL	(F11,25)		OPP	O1	


↑ 1B


↑ 1B


↑ 1B


↑ 1B

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FUL.53

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		100	150	28	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (52)		94	150	28	INCL	(F11)		BOTH	O1	
	8000	Forward (40)		78	500	95	INCL	(F11)		BOTH	O1	 ↑ 1B
		Reverse (50)		93	500	95	INCL	(F11)		BOTH	O1	
	8500	B (57)		72	500	95	INCL	(F11)		OPP	O1	
		C (70)		95	485	92	INCL	(F11)		OPP	O1	
		E (86)		113	400	76	INCL	(F11)		OPP	O1	
		J (105)		141	325	62	INCL	(F11)		OPP	O1	 ↑ 1B
		O (127)		163	270	51	INCL	(F11)		OPP	O1	
		R (137)		179	250	47	INCL	(F11)		OPP	O1	
		S (150)		196	225	43	INCL	(F11)		OPP	O1	
		T (165)		215	210	40	INCL	(F11)		OPP	O1	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RTO-610 **RTO-613** **RTO-6610** **RTO-6613** **RTO-7613** **FUL.54**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		74	250	47	INCL	(F19,20,21)		OPP	01	 4R
		C (73)		98	250	47	INCL	(F19,20,21)		OPP	01	
		E (86)		117	225	43	INCL	(F19,20,21)		OPP	01	
		J (95)		128	225	43	INCL	(F19,20,21)		OPP	01	
		O (125)		168	195	37	INCL	(F19,20,21)		OPP	01	
		R (137)		185	180	34	INCL	(F19,20,21)		OPP	01	
		S (150)		202	162	31	INCL	(F19,20,21)		OPP	01	
		T (165)		222	148	28	INCL	(F19,20,21)		OPP	01	
6000		Forward (73)		98	150	28	INCL	(F19,21)		BOTH	01	 4R
		Reverse (83)		112	150	28	INCL	(F19,21)		BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		51	250	47	INCL	(F21)		OPP	01	 2B
		B (55)		74	250	47	INCL	(F21)		OPP	01	
		C (73)		98	250	47	INCL	(F21)		OPP	01	
		E (86)		117	225	43	INCL	(F21)		OPP	01	
		J (95)		128	225	43	INCL	(F21)		OPP	01	
		O (125)		168	180	34	INCL	(F21)		OPP	01	
		R (137)		185	170	32	INCL	(F21)		OPP	01	
		S (150)		202	155	29	INCL	(F21)		OPP	01	
		T (165)		222	140	27	INCL	(F21)		OPP	01	
8500		B (57)		51	500	95	INCL			OPP	01	 2B
		C (70)		68	485	92	INCL			OPP	01	
		E (86)		81	400	76	INCL			OPP	01	
		J (105)		100	325	62	INCL			OPP	01	
		O (127)		116	270	51	INCL			OPP	01	
		R (137)		127	250	47	INCL			OPP	01	
		S (150)		139	225	43	INCL			OPP	01	
		T (165)		153	210	40	INCL			OPP	01	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing. The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F19: Must use "Shaft-High" assembly arrangement to clear bulge on transmission.

F20: Direct mount pumps will not clear bulge on transmission. Use of adapter will not work.

F21: The maximum allowable output torque for PTO operation on this transmission is 300 lb/ft per EATON.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

AT-1202

FUL.55

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		70	250	47	INCL		GA6032	OPP	02	
		C (73)		93	250	47	INCL		GA6032	OPP	02	
		E (86)		111	225	43	INCL		GA6032	OPP	02	
		J (95)		121	225	43	INCL		GA6032	OPP	02	
	1000	O (125)		159	195	37	INCL		GA6032	OPP	02	
		R (137)		174	180	34	INCL		GA6032	OPP	02	↑ 1B
		S (150)		191	162	31	INCL		GA6032	OPP	02	
		T (165)		210	148	28	INCL		GA6032	OPP	02	
		Z (40)		51	250	47	INCL		GA6032	OPP	02	
		A (50)		64	250	47	INCL		GA6032	OPP	02	
		B (55)		70	250	47	INCL		GA6032	OPP	02	
		C (73)		93	250	47	INCL		GA6032	OPP	02	
		E (86)		111	225	43	INCL		GA6032	OPP	02	
	3200	J (95)		122	225	43	INCL		GA6032	OPP	02	
		O (125)		159	195	37	INCL		GA6032	OPP	02	↑ 1B
		R (137)		174	180	34	INCL		GA6032	OPP	02	
		S (150)		191	162	31	INCL		GA6032	OPP	02	
		T (165)		210	148	28	INCL		GA6032	OPP	02	




8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)			250	47	INCL			OPP	02	
		B (55)		70	250	47	INCL			OPP	02	
		C (73)		93	250	47	INCL			OPP	02	
		E (86)		111	225	43	INCL			OPP	02	
	2000	J (95)		121	225	43	INCL			OPP	02	3T ↓
		O (125)		159	180	34	INCL			OPP	02	
		R (137)		174	170	32	INCL			OPP	02	
		S (150)		191	155	29	INCL			OPP	02	
		T (165)		210	140	27	INCL			OPP	02	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RTO-11609P/R
RTO-12609P/R
RTO-13609P/R
RTO-14609P/R
RTX-11609P/R
RTX-12609P/R
RTX-13609P/R
RTX-14609P/R

FUL.56

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		105	250	47	INCL	(F6,7)		OPP	01	
		C (73)		140	250	47	INCL	(F6,7)		OPP	01	
		E (86)		166	225	43	INCL	(F6,7)		OPP	01	
		J (95)		182	225	43	INCL	(F6,7)		OPP	01	
		O (125)		239	195	37	INCL	(F6,7)		OPP	01	
		R (137)		262	180	34	INCL	(F6,7)		OPP	01	
		S (150)		287	162	31	INCL	(F6,7)		OPP	01	
		T (165)		316	148	28	INCL	(F6,7)		OPP	01	
	3200	Z (40)		77	250	47	INCL	(F6,7)		OPP	01	
		A (50)		96	250	47	INCL	(F6,7)		OPP	01	
		B (55)		105	250	47	INCL	(F6,7)		OPP	01	
		C (73)		140	250	47	INCL	(F6,7)		OPP	01	
		E (86)		167	225	43	INCL	(F6,7)		OPP	01	
		J (95)		183	225	43	INCL	(F6,7)		OPP	01	
		O (125)		239	195	37	INCL	(F6,7)		OPP	01	
		R (137)		262	180	34	INCL	(F6,7)		OPP	01	
		S (150)		287	162	31	INCL	(F6,7)		OPP	01	
		T (165)		315	148	28	INCL	(F6,7)		OPP	01	
	6000	Forward (73)		140	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		159	150	28	INCL	(F7)		BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		96	250	47	INCL	(F11)		OPP	01	
		B (55)		110	250	47	INCL	(F11)		OPP	01	
		C (73)		146	250	47	INCL	(F11)		OPP	01	
		E (86)		174	225	43	INCL	(F11)		OPP	01	
		J (95)		190	225	43	INCL	(F11)		OPP	01	
		O (125)		250	180	34	INCL	(F11)		OPP	01	
		R (137)		274	170	32	INCL	(F11)		OPP	01	
		S (150)		300	155	29	INCL	(F11)		OPP	01	
		T (165)		330	140	27	INCL	(F11)		OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTO-11609P/R
RTO-12609P/R

RTO-13609P/R
RTO-14609P/R

RTX-11609P/R
RTX-12609P/R

RTX-13609P/R
RTX-14609P/R

FUL.56

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		← CONTINUES										
	4100	B (57)	109	420	80	INCL	(F11)			OPP	01	 ↑ 1B
		C (70)	134	350	66	INCL	(F11)			OPP	01	
		E (86)	164	285	54	INCL	(F11)			OPP	01	
		J (105)	201	235	44	INCL	(F11)			OPP	01	
	4250	Output 1 C (96)	132	355	67	INCL	(F11,25)			OPP	01	 ↑ 1B
		Output 2 B (89)	123	380	72	INCL	(F11,25)			OPP	01	
		Output 1 E (112)	154	300	57	INCL	(F11,25)			OPP	01	
		Output 2 C (104)	143	325	62	INCL	(F11,25)			OPP	01	
		Output 1 J (132)	181	260	49	INCL	(F11,25)			OPP	01	
		Output 2 E (121)	166	280	53	INCL	(F11,25)			OPP	01	
		Output 1 O (168)	231	200	38	INCL	(F11,25)			OPP	01	
		Output 2 J (152)	209	220	42	INCL	(F11,25)			OPP	01	
	6800	Forward (55)	105	150	28	INCL	(F11)			BOTH	01	 ↑ 1B
		Reverse (52)	99	150	28	INCL	(F11)			BOTH	01	
	8000	Forward (40)	82	500	95	INCL	(F11)			BOTH	01	 ↑ 1B
		Reverse (50)	98	500	95	INCL	(F11)			BOTH	01	
	8500	B (57)	76	500	95	INCL	(F11)			OPP	01	 ↑ 1B
		C (70)	100	485	92	INCL	(F11)			OPP	01	
		E (86)	119	400	76	INCL	(F11)			OPP	01	
		J (105)	148	325	62	INCL	(F11)			OPP	01	
		O (127)	172	270	51	INCL	(F11)			OPP	01	
		R (137)	188	250	47	INCL	(F11)			OPP	01	
		S (150)	206	225	43	INCL	(F11)			OPP	01	
		T (165)	227	210	40	INCL	(F11)			OPP	01	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.




F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

FO-14E308LL-VCS **RTO-10910B-DM2/DM3** **RTO-14910B-DM2/DM3** **RTOM-16910B-DM3**
FO-16E308LL-VCS **RTO-12910B-DM2/DM3** **RTO-16910B-DM2/DM3**

FUL.57

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		106	250	47	INCL	(F6,7,8,9)		OPP	01	
		C (73)		141	250	47	INCL	(F6,7,8,9)		OPP	01	
		E (86)		168	225	43	INCL	(F6,7,8,9)		OPP	01	
		J (95)		183	225	43	INCL	(F6,7,8,9)		OPP	01	
		O (125)		241	195	37	INCL	(F6,7,8,9)		OPP	01	
		R (137)		265	180	34	INCL	(F6,7,8,9)		OPP	01	
		S (150)		290	162	31	INCL	(F6,7,8,9)		OPP	01	
		T (165)		319	148	28	INCL	(F6,7,8,9)		OPP	01	
3200		Z (40)		77	250	47	INCL	(F6,7,8,9)		OPP	01	
		A (50)		97	250	47	INCL	(F6,7,8,9)		OPP	01	
		B (55)		106	250	47	INCL	(F6,7,8,9)		OPP	01	
		C (73)		141	250	47	INCL	(F6,7,8,9)		OPP	01	
		E (86)		169	225	43	INCL	(F6,7,8,9)		OPP	01	
		J (95)		185	225	43	INCL	(F6,7,8,9)		OPP	01	
		O (125)		241	195	37	INCL	(F6,7,8,9)		OPP	01	
		R (137)		264	180	34	INCL	(F6,7,8,9)		OPP	01	
		S (150)		290	162	31	INCL	(F6,7,8,9)		OPP	01	
		T (165)		318	148	28	INCL	(F6,7,8,9)		OPP	01	
6000		Forward (73)		141	150	28	INCL	(F6,7,8,9)		BOTH	01	
		Reverse (83)		160	150	28	INCL	(F6,7,8,9)		BOTH	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FO-14E308LL-VCS **RTO-10910B-DM2/DM3** **RTO-14910B-DM2/DM3** **RTOM-16910B-DM3**
FO-16E308LL-VCS **RTO-12910B-DM2/DM3** **RTO-16910B-DM2/DM3**

FUL.57

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250	47	INCL	(F8,9,11)		OPP	01	
		B (55)		111	250	47	INCL	(F8,9,11)		OPP	01	
		C (73)		147	250	47	INCL	(F8,9,11)		OPP	01	
		E (86)		175	225	43	INCL	(F8,9,11)		OPP	01	
		J (95)		192	225	43	INCL	(F8,9,11)		OPP	01	
		O (125)		252	180	34	INCL	(F8,9,11)		OPP	01	↑ 1B
		R (137)		276	170	32	INCL	(F8,9,11)		OPP	01	
		S (150)		303	155	29	INCL	(F8,9,11)		OPP	01	
		T (165)		333	140	27	INCL	(F8,9,11)		OPP	01	
	4100	B (57)		110	420	80	INCL	(F8,9,11)		OPP	01	
		C (70)		135	350	66	INCL	(F8,9,11)		OPP	01	
		E (86)		166	285	54	INCL	(F8,9,11)		OPP	01	
		J (105)		203	235	44	INCL	(F8,9,11)		OPP	01	↑ 1B
	4250	Output 1 C (96)		133	355	67	INCL	(F8,9,11,25)		OPP	01	
		Output 2 B (89)		124	380	72	INCL	(F8,9,11,25)		OPP	01	
		Output 1 E (112)		156	300	57	INCL	(F8,9,11,25)		OPP	01	
		Output 2 C (104)		144	325	62	INCL	(F8,9,11,25)		OPP	01	
		Output 1 J (132)		183	260	49	INCL	(F8,9,11,25)		OPP	01	↑ 1B
		Output 2 E (121)		168	280	53	INCL	(F8,9,11,25)		OPP	01	
		Output 1 O (168)		234	200	38	INCL	(F8,9,11,25)		OPP	01	
		Output 2 J (152)		211	220	42	INCL	(F8,9,11,25)		OPP	01	
	6800	Forward (55)		106	150	28	INCL	(F8,9,11)		BOTH	01	
		Reverse (52)		100	150	28	INCL	(F8,9,11)		BOTH	01	↑ 1B
	8000	Forward (40)		83	500	95	INCL	(F8,9,11)		BOTH	01	
		Reverse (50)		99	500	95	INCL	(F8,9,11)		BOTH	01	↑ 1B

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FO-14E308LL-VCS **RTO-10910B-DM2/DM3** **RTO-14910B-DM2/DM3** **RTOM-16910B-DM3**
FO-16E308LL-VCS **RTO-12910B-DM2/DM3** **RTO-16910B-DM2/DM3**

FUL.57

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
		B (57)		76	500	95	INCL	(F8,9,11)		OPP	01	
		C (70)		101	485	92	INCL	(F8,9,11)		OPP	01	
		E (86)		121	400	76	INCL	(F8,9,11)		OPP	01	
		J (105)		150	325	62	INCL	(F8,9,11)		OPP	01	
	8500	O (127)		173	270	51	INCL	(F8,9,11)		OPP	01	
		R (137)		190	250	47	INCL	(F8,9,11)		OPP	01	↑ 1B
		S (150)		208	225	43	INCL	(F8,9,11)		OPP	01	
		T (165)		229	210	40	INCL	(F8,9,11)		OPP	01	
		T (165)		333	140	27	INCL	(F8,9,11)		OPP	01	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

F8: PTO must be wired through the transmission controller per Eaton instructions.

F9: Engine Speed must be advanced to 1000 RPM for PTO operation. PTO will not activate below this speed.

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.




F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTAO-10710B-AC/AS
RTAO-12710B-AC/AS
RTAO-14710B-AC/AS
RTAO-16710B-AC/AS
RTO-10710B-AS/AS2
RTO-10910B-AS2/AS3
RTO-11509
RTO-11608LL
RTO-11609A
RTO-11708LL
RTO-11710B
RTO-11908LL
RTO-12509
RTO-1258LL
RTO-12609A
RTO-12710B/B-AS2
RTO-12910B-AS2/AS3
RTO-13609A
RTO-13710B
RTO-14608LL
RTO-14609A
RTO-14708LL
RTO-14709A
RTO-14710B/B-AS2
RTO-14908LL
RTO-14910B/B-AS2/
B-AS3
RTO-15708LL
RTO-15710B
RTO-16710B/B-AS2
RTO-16908LL
RTO-16910B/B-AS/B-AS2/B-AS3
RTO-18910B-AS2/AS3
RTO-909A
RTO-9509A
RTO-958LL
RTOF-909A
RTOF-9509A
RTOX-11609A
RTX-11609A
RTX-11708LL
RTX-11710B
RTX-12710B
RTX-13710B
RTX-14609A
RTX-14708LL
RTX-14710B
RTX-15710B
RTX-16710B
TO-955LL

FUL.58

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		106	250	47	INCL	(F6,7)		OPP	01	
		C (73)		141	250	47	INCL	(F6,7)		OPP	01	
		E (86)		168	225	43	INCL	(F6,7)		OPP	01	
		J (95)		183	225	43	INCL	(F6,7)		OPP	01	
		O (125)		241	195	37	INCL	(F6,7)		OPP	01	
		R (137)		265	180	34	INCL	(F6,7)		OPP	01	
		S (150)		290	162	31	INCL	(F6,7)		OPP	01	
		T (165)		319	148	28	INCL	(F6,7)		OPP	01	
3200		Z (40)		77	250	47	INCL	(F6,7)		OPP	01	
		A (50)		97	250	47	INCL	(F6,7)		OPP	01	
		B (55)		106	250	47	INCL	(F6,7)		OPP	01	
		C (73)		141	250	47	INCL	(F6,7)		OPP	01	
		E (86)		169	225	43	INCL	(F6,7)		OPP	01	
		J (95)		185	225	43	INCL	(F6,7)		OPP	01	
		O (125)		241	195	37	INCL	(F6,7)		OPP	01	
		R (137)		264	180	34	INCL	(F6,7)		OPP	01	
		S (150)		290	162	31	INCL	(F6,7)		OPP	01	
		T (165)		318	148	28	INCL	(F6,7)		OPP	01	
6000		Forward (73)		141	150	28	INCL	(F7)		BOTH	01	
		Reverse (83)		160	150	28	INCL	(F7)		BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		96	250	47	INCL	(F11)		OPP	01	
		B (55)		111	250	47	INCL	(F11)		OPP	01	
		C (73)		147	250	47	INCL	(F11)		OPP	01	
		E (86)		175	225	43	INCL	(F11)		OPP	01	
		J (95)		192	225	43	INCL	(F11)		OPP	01	
		O (125)		252	180	34	INCL	(F11)		OPP	01	
		R (137)		276	170	32	INCL	(F11)		OPP	01	
		S (150)		303	155	29	INCL	(F11)		OPP	01	
		T (165)		333	140	27	INCL	(F11)		OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FUL.58

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	4100	B (57)	110	420	80	INCL		(F11)		OPP	01	 ↑ 1B
		C (70)	135	350	66	INCL		(F11)		OPP	01	
		E (86)	166	285	54	INCL		(F11)		OPP	01	
		J (105)	203	235	44	INCL		(F11)		OPP	01	
	4250	Output 1 C (96)	133	355	67	INCL		(F11,25)		OPP	01	 ↑ 1B
		Output 2 B (89)	124	380	72	INCL		(F11,25)		OPP	01	
		Output 1 E (112)	156	300	57	INCL		(F11,25)		OPP	01	
		Output 2 C (104)	144	325	62	INCL		(F11,25)		OPP	01	
		Output 1 J (132)	183	260	49	INCL		(F11,25)		OPP	01	
		Output 2 E (121)	168	280	53	INCL		(F11,25)		OPP	01	
		Output 1 O (168)	234	200	38	INCL		(F11,25)		OPP	01	
		Output 2 J (152)	211	220	42	INCL		(F11,25)		OPP	01	
	6800	Forward (55)	106	150	28	INCL		(F11)		BOTH	01	 ↑ 1B
		Reverse (52)	100	150	28	INCL		(F11)		BOTH	01	
	8000	Forward (40)	83	500	95	INCL		(F11)		BOTH	01	 ↑ 1B
		Reverse (50)	99	500	95	INCL		(F11)		BOTH	01	
	8500	B (57)	76	500	95	INCL		(F11)		OPP	01	 ↑ 1B
		C (70)	101	485	92	INCL		(F11)		OPP	01	
		E (86)	121	400	76	INCL		(F11)		OPP	01	
		J (105)	150	325	62	INCL		(F11)		OPP	01	
		O (127)	173	270	51	INCL		(F11)		OPP	01	
		R (137)	190	250	47	INCL		(F11)		OPP	01	
		S (150)	208	225	43	INCL		(F11)		OPP	01	
		T (165)	229	210	40	INCL		(F11)		OPP	01	

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing. The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F11: Trucks with setback front axles and direct mount pumps will have better clearance with "3" assembly arrangement. This will also provide better clearance of air tanks on International chassis.

F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.


F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

RTO-11109A-AT
RTO-12109A-AT
RTO-13109A-AT
RTO-14109A-AT
RTO-16109A-AT
RTO-9109A-AT

FUL.59

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		106	250	47	INCL	(F6,17)		OPP	01	
		C (73)		141	250	47	INCL	(F6,17)		OPP	01	
		E (86)		168	225	43	INCL	(F6,17)		OPP	01	
		J (95)		183	225	43	INCL	(F6,17)		OPP	01	
		O (125)		241	195	37	INCL	(F6,17)		OPP	01	
		R (137)		265	180	34	INCL	(F6,17)		OPP	01	
		S (150)		290	162	31	INCL	(F6,17)		OPP	01	
		T (165)		319	148	28	INCL	(F6,17)		OPP	01	
	3200	Z (40)		77	250	47	INCL	(F6,17)		OPP	01	
		A (50)		97	250	47	INCL	(F6,17)		OPP	01	
		B (55)		106	250	47	INCL	(F6,17)		OPP	01	
		C (73)		141	250	47	INCL	(F6,17)		OPP	01	
		E (86)		169	225	43	INCL	(F6,17)		OPP	01	
		J (95)		185	225	43	INCL	(F6,17)		OPP	01	
		O (125)		241	195	37	INCL	(F6,17)		OPP	01	
		R (137)		264	180	34	INCL	(F6,17)		OPP	01	
		S (150)		290	162	31	INCL	(F6,17)		OPP	01	
		T (165)		318	148	28	INCL	(F6,17)		OPP	01	
	6000	Forward (73)		141	150	28	INCL	(F17)		BOTH	01	
		Reverse (83)		160	150	28	INCL	(F17)		BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		95	250	47	INCL	(F17,18)		OPP	01	
		B (55)		111	250	47	INCL	(F17,18)		OPP	01	
		C (73)		147	250	47	INCL	(F17,18)		OPP	01	
		E (86)		175	225	43	INCL	(F17,18)		OPP	01	
		J (95)		192	225	43	INCL	(F17,18)		OPP	01	
		O (125)		252	180	34	INCL	(F17,18)		OPP	01	
		R (137)		276	170	32	INCL	(F17,18)		OPP	01	
		S (150)		303	155	29	INCL	(F17,18)		OPP	01	
		T (165)		333	140	27	INCL	(F17,18)		OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

RTO-11109A-AT
RTO-12109A-AT
RTO-13109A-AT
RTO-14109A-AT
RTO-16109A-AT
RTO-9109A-AT

FUL.59

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
					← CONTINUES							
	4100	B (57)	110	420	80	INCL	(F17,18)		OPP	01		
		C (70)	135	350	66	INCL	(F17,18)		OPP	01		
		E (86)	166	285	54	INCL	(F17,18)		OPP	01		
		J (105)	203	235	44	INCL	(F17,18)		OPP	01		↑ 1B
	4250	Output 1 C (96)	133	355	67	INCL	(F17,18,25)		OPP	01		
		Output 2 B (89)	124	380	72	INCL	(F17,18,25)		OPP	01		
		Output 1 E (112)	156	300	57	INCL	(F17,18,25)		OPP	01		
		Output 2 C (104)	144	325	62	INCL	(F17,18,25)		OPP	01		
		Output 1 J (132)	183	260	49	INCL	(F17,18,25)		OPP	01		
		Output 2 E (121)	168	280	53	INCL	(F17,18,25)		OPP	01		
		Output 1 O (168)	234	200	38	INCL	(F17,18,25)		OPP	01		
		Output 2 J (152)	211	220	42	INCL	(F17,18,25)		OPP	01		↑ 1B
	6800	Forward (55)	106	150	28	INCL	(F17,18)		BOTH	01		
		Reverse (52)	100	150	28	INCL	(F17,18)		BOTH	01		↑ 1B
	8000	Forward (40)	83	500	95	INCL	(F17,18)		BOTH	01		
		Reverse (50)	99	500	95	INCL	(F17,18)		BOTH	01		↑ 1B
	8500	B (57)	76	500	95	INCL	(F17,18)		OPP	01		
		C (70)	101	485	92	INCL	(F17,18)		OPP	01		
		E (86)	121	400	76	INCL	(F17,18)		OPP	01		
		J (105)	150	325	62	INCL	(F17,18)		OPP	01		
		O (127)	173	270	51	INCL	(F17,18)		OPP	01		
		R (137)	190	250	47	INCL	(F17,18)		OPP	01		
		S (150)	208	225	43	INCL	(F17,18)		OPP	01		
		T (165)	229	210	40	INCL	(F17,18)		OPP	01		↑ 1B

CAUTION:

Eaton Transmission Division has established a **Maximum Torque Limit** for the transmission PTO driver gear. For all RT/RTO/RTLO transmissions the torque limit is **350 ft-lbs (475 Nm) Maximum** unless the transmission has been upgraded to a roller type input shaft bearing.

The Eaton part number **4301417** when installed moves the torque rating for the PTO driver gear to **500 ft-lbs (678 Nm) of torque Maximum**. All torque limits listed in the BZ application book are intermediate ratings. If the transmission has not been upgraded as described above

DO NOT exceed 350 ft-lbs of torque for any application.

FOOT NOTES:

F17: Speeds shown are with transmission torque converter in lock up condition.

F18: This opening is not usable if transmission is equipped with optional low profile oil pan.


F25: Do not exceed maximum torque and power shown in Output 2 when both outputs are working simultaneously.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

FO-6406A-ASX/AW3 **FO-8406A-ASX/AW3** **FUL.61**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		74	250	47	S7	(F3)	GA6032/6500S	OPP	28	
		C (73)		98	250	47	S7	(F3)	GA6032/6500S	OPP	28	
		E (86)		117	225	43	S7	(F3)	GA6032/6500S	OPP	28	
		J (95)		127	225	43	S7	(F3)	GA6032/6500S	OPP	28	
		O (125)		168	195	37	S7	(F3)	GA6032/6500S	OPP	28	
		R (137)		184	180	34	S7	(F3)	GA6032/6500S	OPP	28	
		S (150)		201	162	31	S7	(F3)	GA6032/6500S	OPP	28	
		T (165)		221	148	28	S7	(F3)	GA6032/6500S	OPP	28	
3200		Z (40)		54	250	47	S7	(F3)	GA6032/6500S	OPP	28	
		A (50)		67	250	47	S7	(F3)	GA6032/6500S	OPP	28	
		B (55)		74	250	47	S7	(F3)	GA6032/6500S	OPP	28	
		C (73)		98	250	47	S7	(F3)	GA6032/6500S	OPP	28	
		E (86)		117	225	43	S7	(F3)	GA6032/6500S	OPP	28	
		J (95)		128	225	43	S7	(F3)	GA6032/6500S	OPP	28	
		O (125)		168	195	37	S7	(F3)	GA6032/6500S	OPP	28	
		R (137)		183	180	34	S7	(F3)	GA6032/6500S	OPP	28	
		S (150)		201	162	31	S7	(F3)	GA6032/6500S	OPP	28	
		T (165)		221	148	28	S7	(F3)	GA6032/6500S	OPP	28	
6000		Forward (73)		98	150	28	INCL	(F3)	GA6032/6500S	BOTH	28	
		Reverse (83)		111	150	28	INCL	(F3)	GA6032/6500S	BOTH	28	

FOOT NOTES:


F3: AW3 & DM3 Transmission Codes require PTO connection to TCM per Eaton. Engine Speeds above 1000 RPM are required for PTO operation on code DM3.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

FO-16D313E-LEP **FOM-16D313E-LEP** **FUL.62**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		89	250	47	INCL	(F6,7,8,9)		OPP	01	
		C (73)		118	250	47	INCL	(F6,7,8,9)		OPP	01	
		E (86)		141	225	43	INCL	(F6,7,8,9)		OPP	01	
		J (95)		154	225	43	INCL	(F6,7,8,9)		OPP	01	
		O (125)		202	195	37	INCL	(F6,7,8,9)		OPP	01	
		R (137)		221	180	34	INCL	(F6,7,8,9)		OPP	01	
		S (150)		242	162	31	INCL	(F6,7,8,9)		OPP	01	
		T (165)		267	148	28	INCL	(F6,7,8,9)		OPP	01	
	3200	Z (40)		65	250	47	INCL	(F6,7,8,9)		OPP	01	
		A (50)		81	250	47	INCL	(F6,7,8,9)		OPP	01	
		B (55)		89	250	47	INCL	(F6,7,8,9)		OPP	01	
		C (73)		118	250	47	INCL	(F6,7,8,9)		OPP	01	
		E (86)		141	225	43	INCL	(F6,7,8,9)		OPP	01	
		J (95)		155	225	43	INCL	(F6,7,8,9)		OPP	01	
		O (125)		202	195	37	INCL	(F6,7,8,9)		OPP	01	
		R (137)		221	180	34	INCL	(F6,7,8,9)		OPP	01	
		S (150)		242	162	31	INCL	(F6,7,8,9)		OPP	01	
		T (165)		266	148	28	INCL	(F6,7,8,9)		OPP	01	
	6000	Forward (73)		118	150	28	INCL	(F8,9)		BOTH	01	
		Reverse (83)		134	150	28	INCL	(F8,9)		BOTH	01	

FOOT NOTES:

F13: Eaton Ultra Shift has an inertia brake attached to the bottom of this transmission. Using a 6 bolt adapter it can be moved to the right side opening of the transmission. Eaton Ultra Shift Plus has an inertia brake which allows the use of both bottom and right side PTO apertures.

F6: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

F7: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter changes PTO output rotation.

F8: PTO must be wired through the transmission controller per Eaton instructions.

F9: Engine Speed must be advanced to 1000 RPM for PTO operation. PTO will not activate below this speed.

For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller

ET-16109
ET-16110
ET-18109
ET-18110
ET-20109
ET-20110
ETS-16409
ETS-16410
ETS-18409
ETS-18410
ETS-20409
ETS-20410
FTS-16108LL
FTS-16109A
FTS-18108LL
FTS-18109A
FTS-20108LL
FTS-20109A
RTS-11909A

FUL.63

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		59	250	47	INCL	METRIC STUD KIT		OPP	72	
		C (73)		78	250	47	INCL	METRIC STUD KIT		OPP	72	
		E (86)		93	225	43	INCL	METRIC STUD KIT		OPP	72	
		J (95)		102	225	43	INCL	METRIC STUD KIT		OPP	72	
		O (125)		134	195	37	INCL	METRIC STUD KIT		OPP	72	
		R (137)			180	34	INCL	METRIC STUD KIT		OPP	72	
		S (150)			162	31	INCL	METRIC STUD KIT		OPP	72	
		T (165)			148	28	INCL	METRIC STUD KIT		OPP	72	
3200		Z (40)		43	250	47	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		A (50)		53	250	47	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		B (55)		59	250	47	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		C (73)		78	250	47	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		E (86)		93	225	43	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		J (95)		102	225	43	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		O (125)		134	195	37	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		R (137)			180	34	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		S (150)			162	31	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		T (165)			148	28	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
6000		Forward (73)		78	150	28	INCL	METRIC STUD KIT		BOTH	72	
		Reverse (83)		89	150	28	INCL	METRIC STUD KIT		BOTH	72	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1217203		E (86)		90	468	89	INCL	METRIC STUD KIT		OPP	72	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

ET-16113
ET-18113
ET-20113
ETS-16413
ETS-18413
ETS-20413
FTS-16112L
FTS-18112L
FTS-20112L
RTS-11912L

FUL.64

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		70	250	47	INCL	METRIC STUD KIT		OPP	72	
		C (73)		93	250	47	INCL	METRIC STUD KIT		OPP	72	
		E (86)		110	225	43	INCL	METRIC STUD KIT		OPP	72	
		J (95)		120	225	43	INCL	METRIC STUD KIT		OPP	72	
		O (125)		158	195	37	INCL	METRIC STUD KIT		OPP	72	2R
		R (137)			180	34	INCL	METRIC STUD KIT		OPP	72	
		S (150)			162	31	INCL	METRIC STUD KIT		OPP	72	
		T (165)			148	28	INCL	METRIC STUD KIT		OPP	72	
	3200	Z (40)		51	250	47	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		A (50)		63	250	47	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		B (55)		70	250	47	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		C (73)		93	250	47	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		E (86)		110	225	43	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		J (95)		120	225	43	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	2R
		O (125)		158	195	37	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		R (137)			180	34	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		S (150)			162	31	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
		T (165)			148	28	INCL	METRIC STUD KIT CLUTCH SHIFT		OPP	72	
	6000	Forward -73		93	150	28	INCL	METRIC STUD KIT		BOTH	72	
		Reverse -83		105	150	28	INCL	METRIC STUD KIT		BOTH	72	2R

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1217303	E (86)		100	468	89	INCL	METRIC STUD KIT		OPP	72	2B


For complete part numbers, consult the PTO Series section (page 25)

Eaton Fuller


F-5406B-DM3 **FO-5406B-DM3** **FO-6406A-ASW** **FO-8406A-ASW**

FUL.65

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		74	250	47	S7	(F3)	GA6032/6500S	OPP	28	
		C (73)		98	250	47	S7	(F3)	GA6032/6500S	OPP	28	
		E (86)		117	225	43	S7	(F3)	GA6032/6500S	OPP	28	
		J (95)		127	225	43	S7	(F3)	GA6032/6500S	OPP	28	
	1000	O (125)		168	195	37	S7	(F3)	GA6032/6500S	OPP	28	
		R (137)		184	180	34	S7	(F3)	GA6032/6500S	OPP	28	
		S (150)		201	162	31	S7	(F3)	GA6032/6500S	OPP	28	
		T (165)		221	148	28	S7	(F3)	GA6032/6500S	OPP	28	
		Z (40)		54	250	47	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
		A (50)		67	250	47	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
		B (55)		74	250	47	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
		C (73)		98	250	47	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
	3200	E (86)		117	225	43	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
		J (95)		128	225	43	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
		O (125)		168	195	37	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
		R (137)		183	180	34	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
		S (150)		201	162	31	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
		T (165)		221	148	28	S7	(F3) CLUTCH SHIFT	GA6032/6500S	OPP	28	
	6000	Forward (73)		98	150	28	INCL	(F3)	GA6032/6500S	BOTH	28	
		Reverse (83)		111	150	28	INCL	(F3)	GA6032/6500S	BOTH	28	







FOOT NOTES:


F3 - AW3 & DM3 Transmission Codes require PTO connection to TCM per Eaton. Engine Speeds above 1000 RPM are required for PTO operation on code DM3.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Ford

5R110W Torqshift 4X2 & 4X4 (Diesel 2003-2004) 5R110W Torqshift 4X2 (2005 & Later) FRD.01

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
3900		E (68)		148	120	23	INCL	(FD1,2)		OPP	65	

6R140 Torqshift 4x2 OR 4x4 (2011 & Later - Diesel only) FRD.02

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
3920		E (83)		125	200	23	INCL	(FD1,2)		OPP	71	

10R140 Torqshift 10 Speed (2020 & Later) FRD.03

10 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
3940		O (115)		130	230	44	INCL	(FD3,4)		OPP	78	

FOOT NOTES:

FD1: Minimum Engine Speed for PTO Operation is 1200 RPM.

FD2: Direct Mount Pump Input is limited to SAE A flange.

FD3: Direct Mount ISO-DIN as Standard

FD4: Data shown for stationary mode.


For complete part numbers, consult the PTO Series section (page 25)

Conversion Kits

Pto Series — Internal Ratio — Input Gear — Output Type

3940 P O E 78 3 DA

Lube — Shifting — Assy



Conversion kits
P/N 806635 - SAE A 3/4" 11T
P/N 806735 - SAE A 5/8" 9T
P/N 806835 - SAE A 7/8" 13T

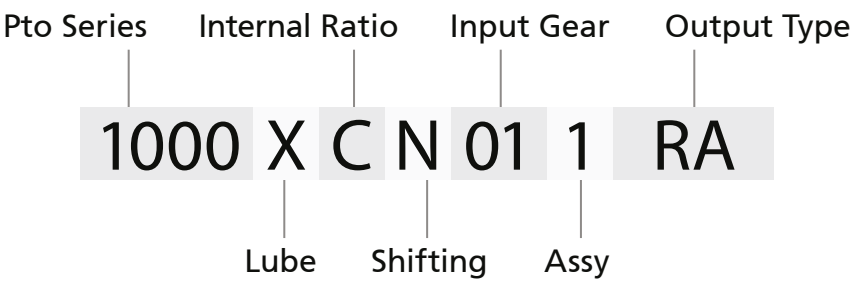
Mack Index

Transmission Model	Pag.
107	231
1070	233
1071	233
1076	233
1078	233
2090	241
10760	233
10780	233
D-107	251
T-3 10ME Rear	237
T-3 10ME Rear	238
T-3 10MLR Rear	237
T-3 10MLR Rear	238
T-3 10M Rear	237
T-3 10M Rear	238
T-105A	235
T-107	251
T-305	247
T-306	247
T-307 Front	247
T-307M Front	247
T-307M Rear	249
T-307 Rear	249
T-308	247
T-308M Front	247
T-308M Rear	249
T-309	241
T-309L	241
T-309LR	241
T-310	242
T-310ME Front	242
T-310M Front	242
T-310MLR Front	241
T-313 Front	241
T-313L21 Front	241
T-313L21 Rear	246
T-313L Front	241
T-313LR21 Front	241
T-313LR21 Rear	246
T-313L Rear	246
T-313LR Front	241
T-313LR Rear	246
T-318 Front	241
T-318L21 Front	241
T-318L21 Rear	246
T-318L Front	241

Transmission Model	Pag.
T-318LR21 Front	241
T-318LR21 Rear	246
T-318L Rear	246
T-318LR Front	241
T-318LR Rear	246
T-1060A	235
T-1070	255
T-1070B	255
T-2050	247
T-2050C	248
T-2060	247
T-2060C	248
T-2070A Front	247
T-2070A Rear	249
T-2070B Front	247
T-2070B Rear	249
T-2070C Front	248
T-2070C Rear	249
T-2070D Front	248
T-2070D Rear	249
T-2070F	247
T-2070 Front	247
T-2070 Rear	249
T-2080	247
T-2080B Front	247
T-2080B Rear	249
T-2080C	248
T-2080D Front	248
T-2080D Rear	249
T-2090	241
T-2090L	241
T-2110B Rear	236
T-2130B Front	241
T-2130B Rear	244
T-2130 Front	241
T-2130 Rear	244
T-2180B Front	241
T-2180B Rear	244
T-2180 Front	241
T-2180 Rear	244
T-31321 Front	241
T-31821 Front	241
TM-308	243
TM-308M Front	241
TM-308M Rear	239
TM-309	243

Transmission Model	Pag.
TM-309M Front	241
TM-309M Rear	239
TMD-12AD	256
TMD-12AFO	257
TMD-12AO	257
TMD-12AO-HD	257
TMD-12AO-HDX	257
TMD-14AFO-HDX	257
TMD-3112	257
TRDL-107	251
TRDL-1070	255
TRDLG-1070	255
TRDXL-107	233
TRDXL-1070	233
TRDXL-1071	233
TRDXL-1078	233
TRDXL-10780	233
TRDXL-10781	233
TRL-107	231
TRL-1076	233
TRL-1078	233
TRL-10760	233
TRL-10780	233
TRTXL-107	251
TRTXL-1070	255
TRTXL-1070B	255
TRX-107	251
TRXL-107	251
TRXL-107A	251
TRXL-1070	253
TRXL-1070A	253
TRXL-1071	251
TRXL-1071A	251
TRXL-1076	233
TRXL-1078	251
TRXL-10710	253
X-107	251
X-107A	251
X-1070	253
X-1070A	253
X-1071	251
X-1071A	251
X-10710	253
X-10710A	253




EXAMPLE:



Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

107 TRL-107

MCK.01

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		43	250	49	INCL	(MK4)	AD530-1X	ENG	O1	
		C (73)		58	250	49	INCL	(MK4)	AD530-1X	ENG	O1	
		E (86)		69	225	44	INCL	(MK4)	AD530-1X	ENG	O1	
		J (95)		75	225	44	INCL	(MK4)	AD530-1X	ENG	O1	
		O (125)		99	200	39	INCL	(MK4)	AD530-1X	ENG	O1	
		R (137)		108	200	39	INCL	(MK4)	AD530-1X	ENG	O1	
		S (150)		118	190	37	INCL	(MK4)	AD530-1X	ENG	O1	
		T (165)		130	175	34	INCL	(MK4)	AD530-1X	ENG	O1	
3200		Z (40)		32	250	49	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		A (50)		39	250	49	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		B (55)		43	250	49	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		C (73)		58	250	49	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		E (86)		69	225	44	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		J (95)		75	225	44	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		O (125)		99	200	39	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		R (137)		108	200	39	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		S (150)		118	190	37	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
		T (165)		130	175	34	INCL	(MK4) CLUTCH SHIFT	AD530-1X	ENG	O1	
6000		Forward (73)		58	150	30	INCL	(MK4)	AD530-1X	BOTH	O1	
		Reverse (-83)		65	150	30	INCL	(MK4)	AD530-1X	BOTH	O1	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		39	250	49	INCL			OPP	O1	
		B (55)		43	250	49	INCL			OPP	O1	
		C (73)		58	250	49	INCL			OPP	O1	
		E (86)		69	225	44	INCL			OPP	O1	
		J (95)		75	225	44	INCL			OPP	O1	
		O (125)		99	200	39	INCL			OPP	O1	
		R (137)		108	200	39	INCL			OPP	O1	
		S (150)		118	190	37	INCL			OPP	O1	
		T (165)		130	175	34	INCL			OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Mack

107 **TRL-107** **MCK.01**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	32	250	49	INCL	(MK) CLUTCH SHIFT		OPP	O1		
		A (50)	39	250	49	INCL	(MK) CLUTCH SHIFT		OPP	O1		
		B (55)	43	250	49	INCL	(MK) CLUTCH SHIFT		OPP	O1		
		C (73)	58	250	49	INCL	(MK) CLUTCH SHIFT		OPP	O1		
		E (86)	69	225	44	INCL	(MK) CLUTCH SHIFT		OPP	O1		3L
		J (95)	75	225	44	INCL	(MK) CLUTCH SHIFT		OPP	O1		
		O (125)	99	200	39	INCL	(MK) CLUTCH SHIFT		OPP	O1		
		R (137)	108	200	39	INCL	(MK) CLUTCH SHIFT		OPP	O1		
		S (150)	118	190	37	INCL	(MK) CLUTCH SHIFT		OPP	O1		
		T (165)	130	175	34	INCL	(MK) CLUTCH SHIFT		OPP	O1		
	4100	B (57)	43	450	87	INCL	(MK2)		OPP	O1		
		C (70)	53	470	90	INCL	(MK2)		OPP	O1		3L
		E (86)	65	470	90	INCL	(MK2)		OPP	O1		
		J (105)	79	400	77	INCL	(MK2)		OPP	O1		
	6800	Forward (55)	58	150	30	INCL			BOTH	O1		3L
		Reverse (-52)	65	150	30	INCL			BOTH	O1		
	8000	Forward (40)	33	500	95	INCL			BOTH	O1		3L
		Reverse (50)	39	500	95	INCL			BOTH	O1		
	8500	B (57)	30	500	95	INCL			OPP	O1		
		C (70)	40	500	95	INCL			OPP	O1		
		E (86)	47	480	90	INCL			OPP	O1		
		J (105)	59	450	86	INCL			OPP	O1		3L
		O (127)	68	400	76	INCL			OPP	O1		
		R (137)	74	360	68	INCL			OPP	O1		
		S (150)	81	320	62	INCL			OPP	O1		
		T (165)	89	280	54	INCL			OPP	O1		

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.



MK4: PTO should be filled with oil before start-up due to location of PTO opening. Check transmission oil level after initial start-up run.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

1070 **10760** **TRDXL-107** **TRDXL-1078** **TRL-1076** **TRL-10780**
1071 **1078** **TRDXL-1070** **TRDXL-10780** **TRL-10760** **TRXL-1076**
1076 **10780** **TRDXL-1071** **TRDXL-10781** **TRL-1078**

MCK.02

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assembly (Rear View)
	1000	B (55)		43	250	49	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	ENG	O1	
		C (73)		58	250	49	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	ENG	O1	
		E (86)		69	225	44	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	ENG	O1	
		J (95)		75	225	44	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	ENG	O1	
		O (125)		99	200	39	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	ENG	O1	
		R (137)		108	200	39	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	ENG	O1	
		S (150)		118	190	37	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	ENG	O1	
		T (165)		130	175	34	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	ENG	O1	
	3200	Z (40)		32	250	49	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		A (50)		39	250	49	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		B (55)		43	250	49	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		C (73)		58	250	49	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		E (86)		69	225	44	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		J (95)		75	225	44	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		O (125)		99	200	39	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		R (137)		108	200	39	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		S (150)		118	190	37	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
		T (165)		130	175	34	INCL	(MK4 ,5 ,6 ,7) CLUTCH SHIFT	AD530-1X	ENG	O1	
	6000	Forward (73)		58	150	30	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	BOTH	O1	
		Reverse (-83)		65	150	30	INCL	(MK4 ,5 ,6 ,7)	AD530-1X	BOTH	O1	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		39	250	49	INCL	(MK5 ,6 ,7)		OPP	O1	
		B (55)		43	250	49	INCL	(MK5 ,6 ,7)		OPP	O1	
		C (73)		58	250	49	INCL	(MK5 ,6 ,7)		OPP	O1	
		E (86)		69	225	44	INCL	(MK5 ,6 ,7)		OPP	O1	
		J (95)		75	225	44	INCL	(MK5 ,6 ,7)		OPP	O1	
		O (125)		99	200	39	INCL	(MK5 ,6 ,7)		OPP	O1	
		R (137)		108	200	39	INCL	(MK5 ,6 ,7)		OPP	O1	
		S (150)		118	190	37	INCL	(MK5 ,6 ,7)		OPP	O1	
		T (165)		130	175	34	INCL	(MK5 ,6 ,7)		OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Mack

1070 **10760** **TRDXL-107** **TRDXL-1078** **TRL-1076** **TRL-10780**
1071 **1078** **TRDXL-1070** **TRDXL-10780** **TRL-10760** **TRXL-1076**
1076 **10780** **TRDXL-1071** **TRDXL-10781** **TRL-1078**

MCK.02

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	32	250	49	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
		A (50)	39	250	49	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
		B (55)	43	250	49	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
		C (73)	58	250	49	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
		E (86)	69	225	44	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	3L
		J (95)	75	225	44	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
		O (125)	99	200	39	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
		R (137)	108	200	39	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
		S (150)	118	190	37	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
		T (165)	130	175	34	INCL	(MK5 ,6 ,7) CLUTCH SHIFT			OPP	O1	
	4100	B (57)	43	450	87	INCL	(MK2 ,5 ,6 ,7)			OPP	O1	
		C (70)	53	470	90	INCL	(MK2 ,5 ,6 ,7)			OPP	O1	3L
		E (86)	65	470	90	INCL	(MK2 ,5 ,6 ,7)			OPP	O1	
		J (105)	79	400	77	INCL	(MK2 ,5 ,6 ,7)			OPP	O1	
	6800	Forward (55)	58	150	30	INCL	(MK5 ,6 ,7)			BOTH	O1	3L
		Reverse (-52)	65	150	30	INCL	(MK5 ,6 ,7)			BOTH	O1	
	8000	Forward (40)	33	500	95	INCL	(MK5 ,6 ,7)			BOTH	O1	3L
		Reverse (50)	39	500	95	INCL	(MK5 ,6 ,7)			BOTH	O1	
	8500	B (57)	30	500	95	INCL	(MK5 ,6 ,7)			OPP	O1	
		C (70)	40	500	95	INCL	(MK5 ,6 ,7)			OPP	O1	
		E (86)	47	480	90	INCL	(MK5 ,6 ,7)			OPP	O1	
		J (105)	59	450	86	INCL	(MK5 ,6 ,7)			OPP	O1	3L
		O (127)	68	400	76	INCL	(MK5 ,6 ,7)			OPP	O1	
		R (137)	74	360	68	INCL	(MK5 ,6 ,7)			OPP	O1	
		S (150)	81	320	62	INCL	(MK5 ,6 ,7)			OPP	O1	
		T (165)	89	280	54	INCL	(MK5 ,6 ,7)			OPP	O1	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK4: PTO should be filled with oil before start-up due to location of PTO opening. Check transmission oil level after initial start-up run.

MK5: In low splitter range, multiply PTO output speeds by .569.

MK6: With splitter in overdrive range, multiply PTO output speeds by 1.62.




MK7: In low-low splitter range, multiply PTO output speeds by .35. In overdrive range, multiply by 1.62.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-105A **T-1060A**

MCK.04


6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		48	250	49	M1			OPP	55	
		C (73)		64	250	49	M1			OPP	55	
		E (86)		77	225	44	M1			OPP	55	
		J (95)		84	225	44	M1			OPP	55	
		O (125)		110	200	39	M1			OPP	55	
		R (137)		121	200	39	M1			OPP	55	
		S (150)		132	190	37	M1			OPP	55	
		T (165)		145	175	34	M1			OPP	55	
	3200	Z (40)		35	250	49	M1	(MK) CLUTCH SHIFT		OPP	55	
		A (50)		44	250	49	M1	(MK) CLUTCH SHIFT		OPP	55	
		B (55)		48	250	49	M1	(MK) CLUTCH SHIFT		OPP	55	
		C (73)		64	250	49	M1	(MK) CLUTCH SHIFT		OPP	55	
		E (86)		77	225	44	M1	(MK) CLUTCH SHIFT		OPP	55	
		J (95)		84	225	44	M1	(MK) CLUTCH SHIFT		OPP	55	
		O (125)		110	200	39	M1	(MK) CLUTCH SHIFT		OPP	55	
		R (137)		121	200	39	M1	(MK) CLUTCH SHIFT		OPP	55	
		S (150)		132	190	37	M1	(MK) CLUTCH SHIFT		OPP	55	
		T (165)		145	175	34	M1	(MK) CLUTCH SHIFT		OPP	55	
	6000	Forward (73)		64	150	30	M1			BOTH	55	
		Reverse (-83)		73	150	30	M1			BOTH	55	


For complete part numbers, consult the PTO Series section (page 25)

Mack

T-2110B Rear

MCK.06

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		72	250	49	INCL	(MK14 ,17)	6140S	OPP	24	
		C (73)		95	250	49	INCL	(MK14 ,17)	6140S	OPP	24	
		E (86)		113	225	44	INCL	(MK14 ,17)	6140S	OPP	24	
		J (95)		124	225	44	INCL	(MK14 ,17)	6140S	OPP	24	
	1010	O (125)		163	200	39	INCL	(MK14 ,17)	6140S	OPP	24	
		R (137)		179	200	39	INCL	(MK14 ,17)	6140S	OPP	24	
		S (150)		196	190	37	INCL	(MK14 ,17)	6140S	OPP	24	
		T (165)		215	175	34	INCL	(MK14 ,17)	6140S	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		65	250	49	INCL	(MK14 ,17)	GA8062	OPP	24	
		B (55)		72	250	49	INCL	(MK14 ,17)	GA8062	OPP	24	
		C (73)		95	250	49	INCL	(MK14 ,17)	GA8062	OPP	24	
		E (86)		113	225	44	INCL	(MK14 ,17)	GA8062	OPP	24	
	2010	J (95)		124	225	44	INCL	(MK14 ,17)	GA8062	OPP	24	
		O (125)		163	200	39	INCL	(MK14 ,17)	GA8062	OPP	24	
		R (137)		179	200	39	INCL	(MK14 ,17)	GA8062	OPP	24	
		S (150)		196	190	37	INCL	(MK14 ,17)	GA8062	OPP	24	
		T (165)		215	175	34	INCL	(MK14 ,17)	GA8062	OPP	24	
		Z (40)		55	250	49	INCL	(MK14 ,17)	GA8062	OPP	24	
		A (50)		68	250	49	INCL	(MK14 ,17)	GA8062	OPP	24	
		B (55)		75	250	49	INCL	(MK14 ,17)	GA8062	OPP	24	
		C (73)		100	250	49	INCL	(MK14 ,17)	GA8062	OPP	24	
	3810	E (86)		119	225	44	INCL	(MK14 ,17)	GA8062	OPP	24	
		J (95)		130	225	44	INCL	(MK14 ,17)	GA8062	OPP	24	
		O (125)		170	200	39	INCL	(MK14 ,17)	GA8062	OPP	24	
		R (137)		187	200	39	INCL	(MK14 ,17)	GA8062	OPP	24	
		S (150)		204	190	37	INCL	(MK14 ,17)	GA8062	OPP	24	
		T (165)		225	175	34	INCL	(MK14 ,17)	GA8062	OPP	24	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
4110		B (57)		68	450	87	INCL	(MK2 ,14 ,17)	GA8062	OPP	24	3L
		C (70)		84	470	90	INCL	(MK2 ,14 ,17)	GA8062	OPP	24	
		E (86)		103	470	90	INCL	(MK2 ,14 ,17)	GA8062	OPP	24	
		J (105)		126	400	77	INCL	(MK2 ,14 ,17)	GA8062	OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000 / 4100 Series "J" & "O" ratios. Check before installing PTO.

MK14: Speeds shown with transmission in 4TH gear. For PTO output speeds with transmission in any other gear, use the following multipliers:

Lo Gear	1st	2nd	3rd	4th	5th
0.26	0.45	0.59	0.77	1.00	1.30

MK17: Neutral select is a covered switch on the dash and is necessary for stationary operation.

T-3 10M Rear **T-3 10ME Rear** **T-3 10MLR Rear**

MCK.07


6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1010		B (55)		72	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	6140S	OPP	24	1R
		C (73)		95	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	6140S	OPP	24	
		E (86)		113	225	44	INCL	(MK9 ,17 ,18 ,19 ,20)	6140S	OPP	24	
		J (95)		124	225	44	INCL	(MK9 ,17 ,18 ,19 ,20)	6140S	OPP	24	
		O (125)		163	200	39	INCL	(MK9 ,17 ,18 ,19 ,20)	6140S	OPP	24	
		R (137)		179	200	39	INCL	(MK9 ,17 ,18 ,19 ,20)	6140S	OPP	24	
		S (150)		196	190	37	INCL	(MK9 ,17 ,18 ,19 ,20)	6140S	OPP	24	
		T (165)		215	175	34	INCL	(MK9 ,17 ,18 ,19 ,20)	6140S	OPP	24	

For complete part numbers, consult the PTO Series section (page 25)

Mack

T-3 10M Rear **T-3 10ME Rear** **T-3 10MLR Rear**

MCK.07

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2010	A (50)		65	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		B (55)		72	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		C (73)		95	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		E (86)		113	225	44	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		J (95)		124	225	44	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		O (125)		163	200	39	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		R (137)		179	200	39	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		S (150)		196	190	37	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		T (165)		215	175	34	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
	3810	Z (40)		55	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		A (50)		68	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		B (55)		75	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		C (73)		100	250	49	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		E (86)		119	225	44	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		J (95)		130	225	44	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		O (125)		170	200	39	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		R (137)		187	200	39	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		S (150)		204	190	37	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		T (165)		225	175	34	INCL	(MK9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
	4110	B (57)		68	450	87	INCL	(MK2 ,9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		C (70)		84	470	90	INCL	(MK2 ,9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		E (86)		103	470	90	INCL	(MK2 ,9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	
		J (105)		126	400	77	INCL	(MK2 ,9 ,17 ,18 ,19 ,20)	GA8062	OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK9: All applications shown are for Rear Box only.

MK17: Neutral select is a covered switch on the dash and is necessary for stationary operation.

MK18: Speeds shown with transmission in 4TH gear. For PTO output speeds with transmission in any other gear, use the following multipliers:

T-310M	Lo Gear	1st	2nd	3rd	4th	5th	Reverse*
	0.22	0.34	0.52	0.72	1.00	1.38	0.88

MK19: Speeds shown with transmission in 4TH gear. For PTO output speeds with transmission in any other gear, use the following multipliers:

T-310MLR	Lo Gear	1st	2nd	3rd	4th	5th	Reverse*
	0.14	0.28	0.52	0.72	1.00	1.40	0.88

MK20: PTO output rotation is reversed when transmission is placed in Reverse.

*Rotation of output shaft is reversed when the main transmission is placed in Reverse.


For complete part numbers, consult the PTO Series section (page 25)


Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

TM-308M Rear **TM-309M Rear**

MCK.08

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1010	B (55)		72	250	49	INCL	(MK9 ,17 ,25)	6140S	OPP	24	
		C (73)		95	250	49	INCL	(MK9 ,17 ,25)	6140S	OPP	24	
		E (86)		113	225	44	INCL	(MK9 ,17 ,25)	6140S	OPP	24	
		J (95)		124	225	44	INCL	(MK9 ,17 ,25)	6140S	OPP	24	
		O (125)		163	200	39	INCL	(MK9 ,17 ,25)	6140S	OPP	24	
		R (137)		179	200	39	INCL	(MK9 ,17 ,25)	6140S	OPP	24	
		S (150)		196	190	37	INCL	(MK9 ,17 ,25)	6140S	OPP	24	
		T (165)		215	175	34	INCL	(MK9 ,17 ,25)	6140S	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2010	A (50)		65	250	49	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		B (55)		72	250	49	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		C (73)		95	250	49	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		E (86)		113	225	44	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		J (95)		124	225	44	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		O (125)		163	200	39	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		R (137)		179	200	39	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		S (150)		196	190	37	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		T (165)		215	175	34	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
	3810	Z (40)		55	250	49	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		A (50)		68	250	49	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		B (55)		75	250	49	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		C (73)		100	250	49	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		E (86)		119	225	44	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		J (95)		130	225	44	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		O (125)		170	200	39	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		R (137)		187	200	39	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		S (150)		204	190	37	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
		T (165)		225	175	34	INCL	(MK9 ,17 ,25)	GA8062	OPP	24	
	4110	B (57)		68	450	87	INCL	(MK2 ,9 ,17 ,25)	GA8062	OPP	24	
		C (70)		84	470	90	INCL	(MK2 ,9 ,17 ,25)	GA8062	OPP	24	
		E (86)		103	470	90	INCL	(MK2 ,9 ,17 ,25)	GA8062	OPP	24	
		J (105)		126	400	77	INCL	(MK2 ,9 ,17 ,25)	GA8062	OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK9: All applications shown are for Rear Box only.

MK17: Neutral select is a covered switch on the dash and is necessary for stationary operation.

MK25: Speeds shown with transmission in 5TH Gear. For PTO output speeds with transmission in any other gear use the following multipliers:


1st	2nd	3rd	4th	5th	6th	Reverse *
0.15	0.25	0.39	0.63	1.00	1.40	1.14


*Rotation of output shaft is reversed when the main transmission is placed in Reverse.

For complete part numbers, consult the PTO Series section (page 25)

Mack

T-2100 **T-2110B Front** **MCK.10**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1010		B (55)		84	250	49	INCL		GA6062	OPP	24	
		C (73)		112	250	49	INCL		GA6062	OPP	24	
		E (86)		133	225	44	INCL		GA6062	OPP	24	
		J (95)		145	225	44	INCL		GA6062	OPP	24	
		O (125)		191	200	39	INCL		GA6062	OPP	24	
		R (137)		210	200	39	INCL		GA6062	OPP	24	
		S (150)		230	190	37	INCL		GA6062	OPP	24	
		T (165)		253	175	34	INCL		GA6062	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2010		A (50)		77	250	49	INCL			OPP	24	
		B (55)		84	250	49	INCL			OPP	24	
		C (73)		112	250	49	INCL			OPP	24	
		E (86)		133	225	44	INCL			OPP	24	
		J (95)		145	225	44	INCL			OPP	24	
		O (125)		191	200	39	INCL			OPP	24	
		R (137)		210	200	39	INCL			OPP	24	
		S (150)		230	190	37	INCL			OPP	24	
		T (165)		253	175	34	INCL			OPP	24	
3810		Z (40)		64	250	49	INCL			OPP	24	
		A (50)		80	250	49	INCL			OPP	24	
		B (55)		88	250	49	INCL			OPP	24	
		C (73)		117	250	49	INCL			OPP	24	
		E (86)		140	225	44	INCL			OPP	24	
		J (95)		153	225	44	INCL			OPP	24	
		O (125)		200	200	39	INCL			OPP	24	
		R (137)		219	200	39	INCL			OPP	24	
		S (150)		240	190	37	INCL			OPP	24	
		T (165)		264	175	34	INCL			OPP	24	
4110		B (57)		80	450	87	INCL	(MK2)		OPP	24	
		C (70)		99	470	90	INCL	(MK2)		OPP	24	
		E (86)		121	470	90	INCL	(MK2)		OPP	24	
		J (105)		148	400	77	INCL	(MK2)		OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "I" & "0" ratios. Check before installing PTO.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

2090
T-2090
T-2090L
T-2130 Front
T-2130B Front
T-2180 Front
T-2180B Front
T-309
T-309L
T-309LR
T-310MLR Front
T-313 Front
T-31321 Front
T-313L Front
T-313L21 Front
T-313LR Front
T-313LR21 Front
T-318 Front
T-31821 Front
T-318L Front
T-318L21 Front
T-318LR Front
T-318LR21 Front
TM-308M Front
TM-309M Front

MCK.13

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		91	250	49	INCL	(MK8 ,13)	GA6062	OPP	24	
		C (73)		120	250	49	INCL	(MK8 ,13)	GA6062	OPP	24	
		E (86)		143	225	44	INCL	(MK8 ,13)	GA6062	OPP	24	
	1010	J (95)		157	225	44	INCL	(MK8 ,13)	GA6062	OPP	24	
		O (125)		206	200	39	INCL	(MK8 ,13)	GA6062	OPP	24	
		R (137)		226	200	39	INCL	(MK8 ,13)	GA6062	OPP	24	
		S (150)		247	190	37	INCL	(MK8 ,13)	GA6062	OPP	24	
		T (165)		272	175	34	INCL	(MK8 ,13)	GA6062	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		82	250	49	INCL	(MK8)		OPP	24	
		B (55)		91	250	49	INCL	(MK8)		OPP	24	
		C (73)		120	250	49	INCL	(MK8)		OPP	24	
		E (86)		143	225	44	INCL	(MK8)		OPP	24	
	2010	J (95)		157	225	44	INCL	(MK8)		OPP	24	
		O (125)		206	200	39	INCL	(MK8)		OPP	24	
		R (137)		226	200	39	INCL	(MK8)		OPP	24	
		S (150)		247	190	37	INCL	(MK8)		OPP	24	
		T (165)		272	175	34	INCL	(MK8)		OPP	24	
		Z (40)		69	250	49	INCL	(MK8)		OPP	24	
		A (50)		86	250	49	INCL	(MK8)		OPP	24	
		B (55)		95	250	49	INCL	(MK8)		OPP	24	
		C (73)		126	250	49	INCL	(MK8)		OPP	24	
		E (86)		151	225	44	INCL	(MK8)		OPP	24	
	3810	J (95)		165	225	44	INCL	(MK8)		OPP	24	
		O (125)		215	200	39	INCL	(MK8)		OPP	24	
		R (137)		236	200	39	INCL	(MK8)		OPP	24	
		S (150)		258	190	37	INCL	(MK8)		OPP	24	
		T (165)		284	175	34	INCL	(MK8)		OPP	24	
		B (57)		86	450	87	INCL	(MK2 ,8)		OPP	24	
		C (70)		106	470	90	INCL	(MK2 ,8)		OPP	24	
	4110	E (86)		130	470	90	INCL	(MK2 ,8)		OPP	24	
		J (105)		159	400	77	INCL	(MK2 ,8)		OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "I" & "0" ratios. Check before installing m0.


MK8: All applications shown are for Front BOX only.


MK13: Possible spring hanger interference on trucks with set back Front axles.

For complete part numbers, consult the PTO Series section (page 25)

Mack

T-310 **T-310M Front** **T-310ME Front** **MCK.14**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		89	250	49	INCL	(MK8)	GA6093	OPP	24	
		C (73)		118	250	49	INCL	(MK8)	GA6093	OPP	24	
		E (86)		141	225	44	INCL	(MK8)	GA6093	OPP	24	
	1010	J (95)		154	225	44	INCL	(MK8)	GA6093	OPP	24	
		O (125)		202	200	39	INCL	(MK8)	GA6093	OPP	24	
		R (137)		222	200	39	INCL	(MK8)	GA6093	OPP	24	
		S (150)		243	190	37	INCL	(MK8)	GA6093	OPP	24	
		T (165)		267	175	34	INCL	(MK8)	GA6093	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		81	250	49	INCL	(MK8)		OPP	24	
		B (55)		89	250	49	INCL	(MK8)		OPP	24	
		C (73)		118	250	49	INCL	(MK8)		OPP	24	
		E (86)		141	225	44	INCL	(MK8)		OPP	24	
	2010	J (95)		154	225	44	INCL	(MK8)		OPP	24	
		O (125)		202	200	39	INCL	(MK8)		OPP	24	
		R (137)		222	200	39	INCL	(MK8)		OPP	24	
		S (150)		243	190	37	INCL	(MK8)		OPP	24	
		T (165)		267	175	34	INCL	(MK8)		OPP	24	
		Z (40)		68	250	49	INCL	(MK8)		OPP	24	
		A (50)		85	250	49	INCL	(MK8)		OPP	24	
		B (55)		93	250	49	INCL	(MK8)		OPP	24	
		C (73)		123	250	49	INCL	(MK8)		OPP	24	
	3810	E (86)		148	225	44	INCL	(MK8)		OPP	24	
		J (95)		162	225	44	INCL	(MK8)		OPP	24	
		O (125)		211	200	39	INCL	(MK8)		OPP	24	
		R (137)		231	200	39	INCL	(MK8)		OPP	24	
		S (150)		254	190	37	INCL	(MK8)		OPP	24	
		T (165)		279	175	34	INCL	(MK8)		OPP	24	
		B (57)		85	450	87	INCL	(MK2 ,8)		OPP	24	
		C (70)		104	470	90	INCL	(MK2 ,8)		OPP	24	
	4110	E (86)		128	470	90	INCL	(MK2 ,8)		OPP	24	
		J (105)		156	400	77	INCL	(MK2 ,8)		OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK8: All applications shown are for Front Box only.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

TM-308 **TM-309**

MCK.15

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1010		B (55)		91	250	49	INCL	(MK22 ,23 ,24)	GA6062	OPP	24	
		C (73)		120	250	49	INCL	(MK22 ,23 ,24)	GA6062	OPP	24	
		E (86)		143	225	44	INCL	(MK22 ,23 ,24)	GA6062	OPP	24	
		J (95)		157	225	44	INCL	(MK22 ,23 ,24)	GA6062	OPP	24	
		O (125)		206	200	39	INCL	(MK22 ,23 ,24)	GA6062	OPP	24	
		R (137)		226	200	39	INCL	(MK22 ,23 ,24)	GA6062	OPP	24	
		S (150)		247	190	37	INCL	(MK22 ,23 ,24)	GA6062	OPP	24	
		T (165)		272	175	34	INCL	(MK22 ,23 ,24)	GA6062	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2010		A (50)		82	250	49	INCL	(MK22 ,23)		OPP	24	
		B (55)		91	250	49	INCL	(MK22 ,23)		OPP	24	
		C (73)		120	250	49	INCL	(MK22 ,23)		OPP	24	
		E (86)		143	225	44	INCL	(MK22 ,23)		OPP	24	
		J (95)		157	225	44	INCL	(MK22 ,23)		OPP	24	
		O (125)		206	200	39	INCL	(MK22 ,23)		OPP	24	
		R (137)		226	200	39	INCL	(MK22 ,23)		OPP	24	
		S (150)		247	190	37	INCL	(MK22 ,23)		OPP	24	
		T (165)		272	175	34	INCL	(MK22 ,23)		OPP	24	

FOOT NOTES:

MK22: Interference with outside diameter of transmission PTO driver gear for Ratios "O" and higher (1000 & 2000 Series PTOs).

MK23: Transmission PTO driver gear (54 Tooth) has non-standard location of .320" Rearward of aperture centerline.


MK24: Possible spring hanger interference.


For complete part numbers, consult the PTO Series section (page 25)

Mack

T-2130 Rear **T-2130B Rear** **T-2180 Rear** **T-2180B Rear**

MCK.16

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		86	250	49	INCL	(MK15 ,16)	6140S	OPP	24	
		C (73)		114	250	49	INCL	(MK15 ,16)	6140S	OPP	24	
		E (86)		135	225	44	INCL	(MK15 ,16)	6140S	OPP	24	
		J (95)		148	225	44	INCL	(MK15 ,16)	6140S	OPP	24	
	1010	O (125)		194	200	39	INCL	(MK15 ,16)	6140S	OPP	24	
		R (137)		213	200	39	INCL	(MK15 ,16)	6140S	OPP	24	
		S (150)		233	190	37	INCL	(MK15 ,16)	6140S	OPP	24	
		T (165)		257	175	34	INCL	(MK15 ,16)	6140S	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		78	250	49	INCL	(MK15 ,16)	GA8062	OPP	24	
		B (55)		86	250	49	INCL	(MK15 ,16)	GA8062	OPP	24	
		C (73)		114	250	49	INCL	(MK15 ,16)	GA8062	OPP	24	
		E (86)		135	225	44	INCL	(MK15 ,16)	GA8062	OPP	24	
	2010	J (95)		148	225	44	INCL	(MK15 ,16)	GA8062	OPP	24	
		O (125)		194	200	39	INCL	(MK15 ,16)	GA8062	OPP	24	
		R (137)		213	200	39	INCL	(MK15 ,16)	GA8062	OPP	24	
		S (150)		233	190	37	INCL	(MK15 ,16)	GA8062	OPP	24	
		T (165)		257	175	34	INCL	(MK15 ,16)	GA8062	OPP	24	
		Z (40)		65	250	49	INCL	(MK15 ,16)	GA8062	OPP	24	
		A (50)		81	250	49	INCL	(MK15 ,16)	GA8062	OPP	24	
		B (55)		89	250	49	INCL	(MK15 ,16)	GA8062	OPP	24	
		C (73)		119	250	49	INCL	(MK15 ,16)	GA8062	OPP	24	
	3810	E (86)		142	225	44	INCL	(MK15 ,16)	GA8062	OPP	24	
		J (95)		156	225	44	INCL	(MK15 ,16)	GA8062	OPP	24	
		O (125)		203	200	39	INCL	(MK15 ,16)	GA8062	OPP	24	
		R (137)		222	200	39	INCL	(MK15 ,16)	GA8062	OPP	24	
		S (150)		244	190	37	INCL	(MK15 ,16)	GA8062	OPP	24	
		T (165)		268	175	34	INCL	(MK15 ,16)	GA8062	OPP	24	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
4110		B (57)		82	450	87	INCL	(MK2 ,15 ,16)	GA8062	OPP	24	3L → 
		C (70)		100	470	90	INCL	(MK2 ,15 ,16)	GA8062	OPP	24	
		E (86)		123	470	90	INCL	(MK2 ,15 ,16)	GA8062	OPP	24	
		J (105)		150	400	77	INCL	(MK2 ,15 ,16)	GA8062	OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK15: Speeds shown with transmission in 4TH gear. For PTO output speeds with transmission in any other gear, use the following multipliers:

				Low	Reverse*	
1st	2nd	3rd	4th	Gear	T-31_L	T-31_LR
0.37	0.51	0.71	1.0	0.20	0.20	0.11

*Rotation of output shaft is reversed when the main transmission is placed in Reverse.

MK16: Speeds shown with splitter in Low Range. Multiply final ratio by 1.18 for High Range.

For complete part numbers, consult the PTO Series section (page 25)

Mack


T-313L Rear
T-313L21 Rear


T-313LR Rear
T-313LR21 Rear

T-318L Rear
T-318L21 Rear

T-318LR Rear
T-318LR21 Rear

MCK.17

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1010		B (55)		86	250	49	INCL	(MK9 ,16 ,17 ,21)	6140S	OPP	24	
		C (73)		114	250	49	INCL	(MK9 ,16 ,17 ,21)	6140S	OPP	24	
		E (86)		135	225	44	INCL	(MK9 ,16 ,17 ,21)	6140S	OPP	24	
		J (95)		148	225	44	INCL	(MK9 ,16 ,17 ,21)	6140S	OPP	24	
		O (125)		194	200	39	INCL	(MK9 ,16 ,17 ,21)	6140S	OPP	24	
		R (137)		213	200	39	INCL	(MK9 ,16 ,17 ,21)	6140S	OPP	24	
		S (150)		233	190	37	INCL	(MK9 ,16 ,17 ,21)	6140S	OPP	24	
		T (165)		257	175	34	INCL	(MK9 ,16 ,17 ,21)	6140S	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2010		A (50)		78	250	49	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		B (55)		86	250	49	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		C (73)		114	250	49	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		E (86)		135	225	44	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		J (95)		148	225	44	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		O (125)		194	200	39	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		R (137)		213	200	39	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		S (150)		233	190	37	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		T (165)		257	175	34	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
3810		Z (40)		65	250	49	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		A (50)		81	250	49	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		B (55)		89	250	49	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		C (73)		119	250	49	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		E (86)		142	225	44	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		J (95)		156	225	44	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		O (125)		203	200	39	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		R (137)		222	200	39	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		S (150)		244	190	37	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
		T (165)		268	175	34	INCL	(MK9 ,16 ,17 ,21)	GA8062	OPP	24	
4110		B (57)		82	450	87	INCL	(MK2 ,9 ,16 ,17 ,21)	GA8062	OPP	24	
		C (70)		100	470	90	INCL	(MK2 ,9 ,16 ,17 ,21)	GA8062	OPP	24	
		E (86)		123	470	90	INCL	(MK2 ,9 ,16 ,17 ,21)	GA8062	OPP	24	
		J (105)		150	400	77	INCL	(MK2 ,9 ,16 ,17 ,21)	GA8062	OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK9: All applications shown are for Rear Box only.

MK16: Speeds shown with splitter in Low Range. Multiply final ratio by 1.18 for High Range.

MK17: Neutral select is a covered switch on the dash and is necessary for stationary operation.

MK21: Speeds shown with transmission in 4TH gear. For PTO output speeds with transmission in any other gear, use the following multipliers:

				Low	Reverse*	
1st	2nd	3rd	4th	Gear	T-21_0	T-21_0B
0.370	0.507	0.712	1.0	0.233	0.109	0.245

*Rotation of output shaft is reversed when the main transmission is placed in Reverse.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-2050
T-2060
T-2070 Front


T-2070A Front
T-2070B Front
T-2070F


T-2080
T-2080B Front
T-305

T-306
T-307 Front
T-307M Front

T-308
T-308M Front

MCK.18

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1010	B (55)		108	250	49	INCL	(MK8)	GA6062	OPP	24	
		C (73)		143	250	49	INCL	(MK8)	GA6062	OPP	24	
		E (86)		171	225	44	INCL	(MK8)	GA6062	OPP	24	
		J (95)		187	225	44	INCL	(MK8)	GA6062	OPP	24	
		O (125)		246	200	39	INCL	(MK8)	GA6062	OPP	24	
		R (137)		269	200	39	INCL	(MK8)	GA6062	OPP	24	
		S (150)		295	190	37	INCL	(MK8)	GA6062	OPP	24	
		T (165)		324	175	34	INCL	(MK8)	GA6062	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2010	A (50)		98	250	49	INCL	(MK8)		OPP	24	
		B (55)		108	250	49	INCL	(MK8)		OPP	24	
		C (73)		143	250	49	INCL	(MK8)		OPP	24	
		E (86)		171	225	44	INCL	(MK8)		OPP	24	
		J (95)		187	225	44	INCL	(MK8)		OPP	24	
		O (125)		246	200	39	INCL	(MK8)		OPP	24	
		R (137)		269	200	39	INCL	(MK8)		OPP	24	
		S (150)		295	190	37	INCL	(MK8)		OPP	24	
		T (165)		324	175	34	INCL	(MK8)		OPP	24	
	3810	Z (40)		82	250	49	INCL	(MK8)		OPP	24	
		A (50)		103	250	49	INCL	(MK8)		OPP	24	
		B (55)		113	250	49	INCL	(MK8)		OPP	24	
		C (73)		150	250	49	INCL	(MK8)		OPP	24	
		E (86)		180	225	44	INCL	(MK8)		OPP	24	
		J (95)		197	225	44	INCL	(MK8)		OPP	24	
		O (125)		257	200	39	INCL	(MK8)		OPP	24	
		R (137)		281	200	39	INCL	(MK8)		OPP	24	
		S (150)		308	190	37	INCL	(MK8)		OPP	24	
		T (165)		338	175	34	INCL	(MK8)		OPP	24	
	4110	B (57)		103	450	87	INCL	(MK2 ,8)		OPP	24	
		C (70)		127	470	90	INCL	(MK2 ,8)		OPP	24	
		E (86)		155	470	90	INCL	(MK2 ,8)		OPP	24	
		J (105)		190	400	77	INCL	(MK2 ,8)		OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.



MK8: All applications shown are for Front Box only.

For complete part numbers, consult the PTO Series section (page 25)

Mack

T-2050C **T-2060C** **T-2070C Front** **T-2070D Front** **T-2080C** **T-2080D Front** **MCK.19**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		100	250	49	INCL		GA6032	OPP	O1	
		C (73)		133	250	49	INCL		GA6032	OPP	O1	
		E (86)		159	225	44	INCL		GA6032	OPP	O1	
	1010	J (95)		173	225	44	INCL		GA6032	OPP	O1	
		O (125)		228	200	39	INCL		GA6032	OPP	O1	
		R (137)		250	200	39	INCL		GA6032	OPP	O1	
		S (150)		274	190	37	INCL		GA6032	OPP	O1	
		T (165)		301	175	34	INCL		GA6032	OPP	O1	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		91	250	49	INCL		GA8093	OPP	O1	
		B (55)		100	250	49	INCL		GA8093	OPP	O1	
		C (73)		133	250	49	INCL		GA8093	OPP	O1	
		E (86)		159	225	44	INCL		GA8093	OPP	O1	
	2010	J (95)		173	225	44	INCL		GA8093	OPP	O1	
		O (125)		228	200	39	INCL		GA8093	OPP	O1	
		R (137)		250	200	39	INCL		GA8093	OPP	O1	
		S (150)		274	190	37	INCL		GA8093	OPP	O1	
		T (165)		301	175	34	INCL		GA8093	OPP	O1	
		Z (40)		73	250	49	INCL		GA8093	OPP	O1	
		A (50)		91	250	49	INCL		GA8093	OPP	O1	
		B (55)		100	250	49	INCL		GA8093	OPP	O1	
		C (73)		133	250	49	INCL		GA8093	OPP	O1	
		E (86)		160	225	44	INCL		GA8093	OPP	O1	
	3810	J (95)		175	225	44	INCL		GA8093	OPP	O1	
		O (125)		228	200	39	INCL		GA8093	OPP	O1	
		R (137)		250	200	39	INCL		GA8093	OPP	O1	
		S (150)		274	190	37	INCL		GA8093	OPP	O1	
		T (165)		301	175	34	INCL		GA8093	OPP	O1	
		B (57)		100	450	87	INCL	(MK2)	GA8093	OPP	O1	
		C (70)		122	470	90	INCL	(MK2)	GA8093	OPP	O1	
	4110	E (86)		150	470	90	INCL	(MK2)	GA8093	OPP	O1	
		J (105)		183	400	77	INCL	(MK2)	GA8093	OPP	O1	

FOOT NOTES:


MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-2070 Rear
T-2070A Rear
T-2070B Rear
T-2070C Rear
T-2070D Rear
T-2080B Rear
T-2080D Rear
T-307 Rear
T-307M Rear
T-308M Rear

MCK.20

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1010	B (55)		120	250	49	INCL	(MK10 ,11 ,12)	6140S	OPP	24	
		C (73)		159	250	49	INCL	(MK10 ,11 ,12)	6140S	OPP	24	
		E (86)		190	225	44	INCL	(MK10 ,11 ,12)	6140S	OPP	24	
		J (95)		207	225	44	INCL	(MK10 ,11 ,12)	6140S	OPP	24	
		O (125)		273	200	39	INCL	(MK10 ,11 ,12)	6140S	OPP	24	
		R (137)		299	200	39	INCL	(MK10 ,11 ,12)	6140S	OPP	24	
		S (150)		328	190	37	INCL	(MK10 ,11 ,12)	6140S	OPP	24	
		T (165)		360	175	34	INCL	(MK10 ,11 ,12)	6140S	OPP	24	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2010	A (50)		109	250	49	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		B (55)		120	250	49	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		C (73)		159	250	49	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		E (86)		190	225	44	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		J (95)		207	225	44	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		O (125)		273	200	39	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		R (137)		299	200	39	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		S (150)		328	190	37	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		T (165)		360	175	34	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
	3810	Z (40)		91	250	49	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		A (50)		114	250	49	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		B (55)		126	250	49	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		C (73)		167	250	49	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		E (86)		200	225	44	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		J (95)		218	225	44	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		O (125)		285	200	39	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		R (137)		312	200	39	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		S (150)		342	190	37	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	
		T (165)		376	175	34	INCL	(MK10 ,11 ,12)	GA8062	OPP	24	

CONTINUES →

Mack

T-2070 Rear
T-2070A Rear
T-2070B Rear
T-2070C Rear
T-2070D Rear
T-2080B Rear
T-2080D Rear
T-307 Rear
T-307M Rear
T-308M Rear

MCK.20

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	4110	B (57)		115	450	87	INCL	(MK2 ,10 ,11 ,12)	GA8062	OPP	24	3L
		C (70)		141	470	90	INCL	(MK2 ,10 ,11 ,12)	GA8062	OPP	24	
		E (86)		173	470	90	INCL	(MK2 ,10 ,11 ,12)	GA8062	OPP	24	
		J (105)		211	400	77	INCL	(MK2 ,10 ,11 ,12)	GA8062	OPP	24	

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK10: Speeds shown with transmission in 5TH Gear. For PTO output speeds with transmission in any other gear use the following multipliers:

1st	2nd	3rd	4th
0.114	0.196	0.343	0.597

MK11: Rotation of output shaft is reversed when the main transmission is in Reverse. Multiply output speed by .113.

MK12: With this transmission in 5TH gear, multiply PTO output speed by .890.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

D-107
T-107
TRDL-107




TRTXL-107
TRX-107
TRXL-107


TRXL-1071
TRXL-1071A
TRXL-1078

TRXL-107A
X-107
X-1071

X-1071A
X-107A

MCK.21

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		97	250	49	S3	(MK1)	AD530-1X 6240S	ENG	O1	
		C (73)		129	250	49	S3	(MK1)	AD530-1X 6240S	ENG	O1	
		E (86)		154	225	44	S3	(MK1)	AD530-1X 6240S	ENG	O1	
		J (95)		168	225	44	S3	(MK1)	AD530-1X 6240S	ENG	O1	
		O (125)		222	200	39	S3	(MK1)	AD530-1X 6240S	ENG	O1	
		R (137)		243	200	39	S3	(MK1)	AD530-1X 6240S	ENG	O1	
		S (150)		266	190	37	S3	(MK1)	AD530-1X 6240S	ENG	O1	
		T (165)		292	175	34	S3	(MK1)	AD530-1X 6240S	ENG	O1	
3200		Z (40)		71	250	49	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		A (50)		89	250	49	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		B (55)		97	250	49	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		C (73)		129	250	49	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		E (86)		155	225	44	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		J (95)		170	225	44	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		O (125)		222	200	39	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		R (137)		243	200	39	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		S (150)		266	190	37	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		T (165)		292	175	34	INCL	(MK1 ,4) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
6000		Forward (73)		129	150	30	S3	(MK1 ,4)	AD530-1X 6240S	BOTH	O1	
		Reverse (83)		147	150	30	S3	(MK1 ,4)	AD530-1X 6240S	BOTH	O1	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		89	250	49	INCL	(MK1)	8190S	OPP	O1	
		B (55)		97	250	49	INCL	(MK1)	8190S	OPP	O1	
		C (73)		129	250	49	INCL	(MK1)	8190S	OPP	O1	
		E (86)		154	225	44	INCL	(MK1)	8190S	OPP	O1	
		J (95)		168	225	44	INCL	(MK1)	8190S	OPP	O1	
		O (125)		222	200	39	INCL	(MK1)	8190S	OPP	O1	
		R (137)		243	200	39	INCL	(MK1)	8190S	OPP	O1	
		S (150)		266	190	37	INCL	(MK1)	8190S	OPP	O1	
		T (165)		292	175	34	INCL	(MK1)	8190S	OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Mack

D-107
T-107
TRDL-107

TRTXL-107
TRX-107
TRXL-107

TRXL-1071
TRXL-1071A
TRXL-1078

TRXL-107A
X-107
X-1071

X-1071A
X-107A

MCK.21

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)		71	250	49	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
		A (50)		89	250	49	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
		B (55)		97	250	49	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
		C (73)		129	250	49	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
		E (86)		155	225	44	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	3L
		J (95)		170	225	44	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
		O (125)		222	200	39	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
		R (137)		243	200	39	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
		S (150)		266	190	37	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
		T (165)		292	175	34	INCL	(MK1) CLUTCH SHIFT	8190S	OPP	O1	
	4100	B (57)		97	450	87	INCL	(MK1 ,2)	8190S	OPP	O1	
		C (70)		119	470	90	INCL	(MK1 ,2)	8190S	OPP	O1	3L
		E (86)		146	470	90	INCL	(MK1 ,2)	8190S	OPP	O1	
		J (105)		178	400	77	INCL	(MK1 ,2)	8190S	OPP	O1	
	6800	Forward (55)		129	150	30	INCL	(MK1)	8190S	BOTH	O1	3L
		Reverse (-52)		147	150	30	INCL	(MK1)	8190S	BOTH	O1	
	8000	Forward (40)		73	500	95	INCL	(MK1)	8190S	BOTH	O1	3L
		Reverse (50)		87	500	95	INCL	(MK1)	8190S	BOTH	O1	
	8500	B (57)		67	500	95	INCL	(MK1)	8190S	OPP	O1	
		C (70)		89	500	95	INCL	(MK1)	8190S	OPP	O1	
		E (86)		106	480	90	INCL	(MK1)	8190S	OPP	O1	
		J (105)		132	450	86	INCL	(MK1)	8190S	OPP	O1	3L
		O (127)		152	400	76	INCL	(MK1)	8190S	OPP	O1	
		R (137)		167	360	68	INCL	(MK1)	8190S	OPP	O1	
		S (150)		183	320	62	INCL	(MK1)	8190S	OPP	O1	
		T (165)		201	280	54	INCL	(MK1)	8190S	OPP	O1	

FOOT NOTES:

MK1: Speeds shown with transmission in 5TH Gear. For PTO output speeds with transmission in any other gear use the following multipliers:

1st	2nd	3rd	4th
0.116	0.200	0.353	0.603

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.




MK4: PTO should be filled with oil before start-up due to location of PTO opening. Check transmission oil level after initial start-up run.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

TRXL-1070 **TRXL-10710** **X-1070A** **X-10710A**
TRXL-1070A **X-1070** **X-10710**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		97	250	49	S3	(MK4 ,26)	AD530-1X 6240S	ENG	O1	
		C (73)		129	250	49	S3	(MK4 ,26)	AD530-1X 6240S	ENG	O1	
		E (86)		154	225	44	S3	(MK4 ,26)	AD530-1X 6240S	ENG	O1	
		J (95)		168	225	44	S3	(MK4 ,26)	AD530-1X 6240S	ENG	O1	
		O (125)		222	200	39	S3	(MK4 ,26)	AD530-1X 6240S	ENG	O1	
		R (137)		243	200	39	S3	(MK4 ,26)	AD530-1X 6240S	ENG	O1	
		S (150)		266	190	37	S3	(MK4 ,26)	AD530-1X 6240S	ENG	O1	
		T (165)		292	175	34	S3	(MK4 ,26)	AD530-1X 6240S	ENG	O1	
	3200	Z (40)		71	250	49	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		A (50)		89	250	49	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		B (55)		97	250	49	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		C (73)		129	250	49	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		E (86)		155	225	44	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		J (95)		170	225	44	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		O (125)		222	200	39	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		R (137)		243	200	39	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		S (150)		266	190	37	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
		T (165)		292	175	34	S3	(MK4 ,26) CLUTCH SHIFT	AD530-1X 6240S	ENG	O1	
	6000	Forward (73)		129	150	30	S3	(MK4 ,26)	AD530-1X 6240S	BOTH	O1	
		Reverse (-83)		147	150	30	S3	(MK4 ,26)	AD530-1X 6240S	BOTH	O1	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		89	250	49	INCL	(MK26)	8190S	OPP	O1	
		B (55)		97	250	49	INCL	(MK26)	8190S	OPP	O1	
		C (73)		129	250	49	INCL	(MK26)	8190S	OPP	O1	
		E (86)		154	225	44	INCL	(MK26)	8190S	OPP	O1	
		J (95)		168	225	44	INCL	(MK26)	8190S	OPP	O1	
		O (125)		222	200	39	INCL	(MK26)	8190S	OPP	O1	
		R (137)		243	200	39	INCL	(MK26)	8190S	OPP	O1	
		S (150)		266	190	37	INCL	(MK26)	8190S	OPP	O1	
		T (165)		292	175	34	INCL	(MK26)	8190S	OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Mack

TRXL-1070 **TRXL-10710** **X-1070A** **X-10710A**
TRXL-1070A **X-1070** **X-10710**

MCK.22

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	71	250	49	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
		A (50)	89	250	49	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
		B (55)	97	250	49	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
		C (73)	129	250	49	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
		E (86)	155	225	44	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		3L
		J (95)	170	225	44	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
		O (125)	222	200	39	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
		R (137)	243	200	39	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
		S (150)	266	190	37	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
		T (165)	292	175	34	INCL	(MK26) CLUTCH SHIFT	8190S	OPP	O1		
	4100	B (57)	97	450	87	INCL	(MK2 ,26)	8190S	OPP	O1		
		C (70)	119	470	90	INCL	(MK2 ,26)	8190S	OPP	O1		3L
		E (86)	146	470	90	INCL	(MK2 ,26)	8190S	OPP	O1		
		J (105)	178	400	77	INCL	(MK2 ,26)	8190S	OPP	O1		
	6800	Forward (55)	129	150	30	INCL	(MK26)	8190S	BOTH	O1		3L
		Reverse (-52)	147	150	30	INCL	(MK26)	8190S	BOTH	O1		
	8000	Forward (40)	73	500	95	INCL	(MK26)	8190S	BOTH	O1		3L
		Reverse (50)	87	500	95	INCL	(MK26)	8190S	BOTH	O1		
	8500	B (57)	67	500	95	INCL	(MK26)	8190S	OPP	O1		
		C (70)	89	500	95	INCL	(MK26)	8190S	OPP	O1		
		E (86)	106	480	90	INCL	(MK26)	8190S	OPP	O1		
		J (105)	132	450	86	INCL	(MK26)	8190S	OPP	O1		3L
		O (127)	152	400	76	INCL	(MK26)	8190S	OPP	O1		
		R (137)	167	360	68	INCL	(MK26)	8190S	OPP	O1		
		S (150)	183	320	62	INCL	(MK26)	8190S	OPP	O1		
		T (165)	201	280	54	INCL	(MK26)	8190S	OPP	O1		

FOOT NOTES:

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK4: PTO should be filled with oil before start-up due to location of PTO opening. Check transmission oil level after initial start-up run.

MK26: Speeds shown with transmission in 4TH gear. For PTO output speeds with transmission in any other gear, use the following multipliers:




1st	2nd	3rd	4th	5th
0.191	0.328	0.578	1.000	1.670

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

T-1070 **T-1070B** **TRDL-1070** **TRDLG-1070** **TRTXL-1070** **TRTXL-1070B** **MCK.23**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		125	250	49	S3	(MK1 ,3 ,4)	AD530-1X 6240S	ENG	O1	
		C (73)		166	250	49	S3	(MK1 ,3 ,4)	AD530-1X 6240S	ENG	O1	
		E (86)		198	225	44	S3	(MK1 ,3 ,4)	AD530-1X 6240S	ENG	O1	
		J (95)		216	225	44	S3	(MK1 ,3 ,4)	AD530-1X 6240S	ENG	O1	
		O (125)		285	200	39	S3	(MK1 ,3 ,4)	AD530-1X 6240S	ENG	O1	
		R (137)		312	200	39	S3	(MK1 ,3 ,4)	AD530-1X 6240S	ENG	O1	
		S (150)		342	190	37	S3	(MK1 ,3 ,4)	AD530-1X 6240S	ENG	O1	
		T (165)		376	175	34	S3	(MK1 ,3 ,4)	AD530-1X 6240S	ENG	O1	
6000		Forward (73)		166	150	30	S3	(MK1 ,3 ,4)	AD530-1X 6240S	BOTH	O1	
		Reverse (-83)		189	150	30	S3	(MK1 ,3 ,4)	AD530-1X 6240S	BOTH	O1	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		114	250	49	INCL	(MK1 ,3)	8190S	OPP	O1	
		B (55)		125	250	49	INCL	(MK1 ,3)	8190S	OPP	O1	
		C (73)		166	250	49	INCL	(MK1 ,3)	8190S	OPP	O1	
		E (86)		198	225	44	INCL	(MK1 ,3)	8190S	OPP	O1	
		J (95)		216	225	44	INCL	(MK1 ,3)	8190S	OPP	O1	
		O (125)		285	200	39	INCL	(MK1 ,3)	8190S	OPP	O1	
		R (137)		312	200	39	INCL	(MK1 ,3)	8190S	OPP	O1	
		S (150)		342	190	37	INCL	(MK1 ,3)	8190S	OPP	O1	
		T (165)		376	175	34	INCL	(MK1 ,3)	8190S	OPP	O1	
6800		Forward (55)		166	150	30	INCL	(MK1 ,3)	8190S	BOTH	O1	
		Reverse (-52)		189	150	30	INCL	(MK1 ,3)	8190S	BOTH	O1	
8000		Forward (40)		94	500	95	INCL	(MK1 ,3)	8190S	BOTH	O1	
		Reverse (50)		112	500	95	INCL	(MK1 ,3)	8190S	BOTH	O1	


CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Mack

T-1070 **T-1070B** **TRDL-1070** **TRDLG-1070** **TRTXL-1070** **TRTXL-1070B**

MCK.23

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	8500	B (57)		86	500	95	INCL	(MK1 ,3)	8190S	OPP	O1	
		C (70)		114	500	95	INCL	(MK1 ,3)	8190S	OPP	O1	
		E (86)		136	480	90	INCL	(MK1 ,3)	8190S	OPP	O1	
		J (105)		169	450	86	INCL	(MK1 ,3)	8190S	OPP	O1	
		O (127)		196	400	76	INCL	(MK1 ,3)	8190S	OPP	O1	
		R (137)		215	360	68	INCL	(MK1 ,3)	8190S	OPP	O1	
		S (150)		235	320	62	INCL	(MK1 ,3)	8190S	OPP	O1	
		T (165)		259	280	54	INCL	(MK1 ,3)	8190S	OPP	O1	

FOOT NOTES:

MK1: Speeds shown with transmission in 5TH Gear. For PTO output speeds with transmission in any other gear use the following multipliers:

1st	2nd	3rd	4th
0.116	0.200	0.353	0.603

MK2: Possible internal transmission interference with 4000/4100 Series "J" & "O" ratios. Check before installing PTO.

MK3: CAUTION: Transmission has a low range compound section. If transmission is operated in this low range, then multiply PTO output speed by .594. This is in addition to any speed reduction in the lower gears.

MK4: PTO should be filled with oil before start-up due to location of PTO opening. Check transmission oil level after initial start-up run.

TMD-12AD

MCK.25

4 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assembly
1196K03		100%	70	88	609	84	INCL	(MK27 ,28)	116504	OPP		
1197K03		130%	91	117	361	52	INCL	(MK27 ,28)	116504	ENG		
1198K03		132%	92	119	310	42	INCL	(MK27 ,28)	116504	ENG		
11111K03		180%	126	158	361	76	INCL	(MK27 ,28)	116504	ENG		
11104K03		185%	130	163	413	57	INCL	(MK27 ,28 ,CLUTCH SHIFT)	116504	ENG		
11107KXXX			[1]: 59 [2]: 129	[1]: 76 [2]: 166	332 369	64 71	INCL	(MK [1]=SHAFT 1 [2]=SHAFT 2,27,28)	116704	(1)ENG (2)OPP		

FOOT NOTES:

MK27: If Hi/Low speed option is required chassis needs to be ordered with PTO prep package and premium shifter.

MK28: Dealer must flash TCM (Transmission Control Module) for PTO recognition when using factory installed Prep package.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

TMD-12AFO **TMD-12AO-HD** **TMD-14AFO-HDX**
TMD-12AO **TMD-12AO-HDX** **TMD-3112**

MCK.26

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assembly
			Low	High								
1196K03		100%	90	115	609	84	INCL	(MK27 ,28)	116504	OPP		
1197K03		130%	117	150	361	52	INCL	(MK27 ,28)	116504	ENG		
1198K03		132%	119	152	310	42	INCL	(MK27 ,28)	116504	ENG		
11111K03		180%	162	207	361	76	INCL	(MK27 ,28)	116504	ENG		
11104K03		185%	167	213	413	57	INCL	(MK27 ,28 ,CLUTCH SHIFT)	116504	ENG		
11107KXXX			[1]: 76 [2]: 166	[1]: 97 [2]: 212	332 369	64 71	INCL	(MK [1]=SHAFT 1 [2]=SHAFT 2,27,28)	116704	(1)ENG (2)OPP		

FOOT NOTES:

MK27: If Hi/Low speed option is required chassis needs to be ordered with PTO prep package and premium shifter.

MK28: Dealer must flash TCM (Transmission Control Module) for PTO recognition when using factory installed Prep package.

For complete part numbers, consult the PTO Series section (page 25)

Mercedes Index

Transmission Model	Pag.
G2/24-5/6.71	270
G2/24-5/7.31	269
G3 36-5/8.98	260
G3 40-5/7.508	263
G3 45-6/8.5	262
G3 50-5/8.5	261
G3 55-6/8.5	262
G3 60-5/5.4	266
G3 60-5/6.106	265
G3 60-5/7.5	263
G3 61-5/6.1	265
G3 65-8/9.29	266
G3 65-9/13.36	266
G3 90-8/9.29	266
G3 90-9/13.36	266
G4 65-6/9	263
G4 65-7/11	261
G4 95-6/9	263
G4 95-7/11	261
G4 110-6/9	263
G20	260
G28	270
G32	270
G33	270
G56-6/6.29-078.	264
G60-6/9.2	262
G71-6/9.20-1.0	262
G85-6/6.7	265
G90-6/6.70-0.73	265
G100	261
G125-9/15.9	269
G125-16/11.9	271
G125-16/14	268
G131-9/14.57-1.0	267
G135-16/11.9	271
G140-8	264
G141-9/14.57-1.0	266
G155-9/15.9	269
G155-16/11.9	271
G155-16/14	268
G180-16/11.9	271
G180-16/14	268
G200-16/11.9	270
G210-16/14.2-0.83	269
G211-12/14.93-1.0 NewAMT	273
G211-12K/14.93-1.0	273
G211-16/17.0	273
G221-9/16.15-1.0	267
G230-12/11.67-0.78 NewAMT	272
G230-12K/11.67-0.78	272
G230-16S/14.2-0.83	272
G231-16/17.0	266
G240-16/11.7	271
G241-16K/17.0-1.0	266
G260-16/9.75-0.57	272
G280-16/11.72-0.69 NewAMT	271
G280-16K/11.72-0.69	271
G281-12/14.93-1.0 NewAMT	268

Transmission Model	Pag.
G281-12K/14.93-1.0	268
G330-12/11.64-0.78 NewAMT	272
G330-12K/11.64-0.78	272
GV4 65-6/9	263
GV4 95-6/9	263
GV4 110-6/9	263
MB-1 (ORIGINAL)	260
MBT-520-6DA	262
MBT-520S-6D	262
MBT-660-6OA	265
MBT-660S-6O	265
NSG 370-6	270
NSG 400-6	270
TSG 360	270
TSG 480	270

Mercedes

MB-1 (ORIGINAL)

MER.01

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0718203		100%	0	0	435	84	INCL			ENG		
0714503		132%	0	0	310	60	INCL			OPP		

G20

MER.02

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0715703		133%	0		310	60	INCL			OPP		

G3 36-5/8.98

MER.03

5 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0714003		130%	51	0	361	70	INCL			OPP		
073503		132%	52	0	310	60	INCL			OPP		
0724703		180%	71	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

G4 65-7/11 **G4 95-7/11**

MER.04

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0718403		100%	41	0	516	100	INCL			ENG		
0710703		130%	53	0	361	70	INCL			OPP		
074103		132%	54	0	310	60	INCL			OPP		
079203		165%	67	0	310	60	INCL			ENG		
0725003		180%	73	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		
077503		200%	82	0	310	60	INCL			ENG		

G3 50-5/8.5

MER.05

5 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0714003		130%	55	0	361	70	INCL			OPP		
073503		132%	55	0	310	60	INCL			OPP		
0724703		180%	75	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		

G100

MER.06

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0718103		100%	42	50	516	100	INCL			ENG		
0710403		130%	55	65	420	81	INCL			OPP		
078203		132%	55	66	310	60	INCL			OPP		
078503		140%	59	70	310	60	INCL			ENG		
078403		165%	69	82	310	60	INCL			ENG		
0725903		180%	75	90	361	64	INCL	H.DUTY, ROTATED OUTPUT		OPP		
078603		200%	84	100	310	60	INCL			ENG		

For complete part numbers, consult the PTO Series section (page 25)

Mercedes

G60-6/9.2 **G71-6/9.20-1.0** **MBT-520-6DA** **MBT-520S-6D**

MER.07

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1010		C (73)	53		250	47	M1			OPP	70	
		E (86)	63		225	43	M1			OPP	70	
		J (95)	69		225	43	M1			OPP	70	
		O (125)	90		195	37	M1			OPP	70	
		R (137)	99		180	34	M1			OPP	70	
		S (150)	108		162	31	M1			OPP	70	
		T (165)	119		148	28	M1			OPP	70	

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0712103		130%	58	0	361	70	INCL			OPP		
076003		132%	59	0	310	60	INCL			OPP		
0717803		140%	63	0	310	60	INCL			ENG		
0725303		180%	81	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		
077403		200%	90	0	310	60	INCL			ENG		

G3 45-6/8.5 **G3 55-6/8.5**

MER.08

5 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0714003		130%	60	0	361	70	INCL			OPP		
073503		132%	61	0	310	60	INCL			OPP		
0724703		180%	83	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

G4 110-6/9 **G4 65-6/9** **G4 95-6/9**

MER.09

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0718403		100%	47	0	516	100	INCL			ENG		
0710703		130%	61	0	361	70	INCL			OPP		
074103		132%	62	0	310	60	INCL			OPP		
079203		165%	77	0	310	60	INCL			ENG		
0725003		180%	85	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		
077503		200%	94	0	310	60	INCL			ENG		

GV4 110-6/9 **GV4 65-6/9** **GV4 95-6/9**

MER.10

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0718403		100%	47	56	516	100	INCL			ENG		
0710703		130%	61	73	361	70	INCL			OPP		
074103		132%	62	74	310	60	INCL			OPP		
079203		165%	77	93	310	60	INCL			ENG		
0725003		180%	85	102	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		
077503		200%	94	112	310	60	INCL			ENG		

G3 40-5/7.508 **G3 60-5/7.5**

MER.11

5 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0714003		130%	61	0	361	70	INCL			OPP		
073503		132%	62	0	310	60	INCL			OPP		
0724703		180%	85	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		

For complete part numbers, consult the PTO Series section (page 25)

Mercedes

G140-8

MER.12

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0718103		100%	48	76	516	100	INCL			ENG		
0710403		130%	62	99	420	81	INCL			OPP		
078203		132%	63	100	310	60	INCL			OPP		
078503		140%	67	106	310	60	INCL			ENG		
078403		165%	79	125	310	60	INCL			ENG		
0725903		180%	87	137	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		
078603		200%	96	152	310	60	INCL			ENG		

G56-6/6.29-078.

MER.13

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
		C (73)	60		250	47	INCL	(MB3) DODGE		OPP	69	
		E (86)	70		225	43	INCL	(MB3) DODGE		OPP	69	
		J (95)	77		225	43	INCL	(MB3) DODGE		OPP	69	
1200		O (125)	101		200	38	INCL	(MB3) DODGE		OPP	69	
		R (137)	111		200	38	INCL	(MB3) DODGE		OPP	69	
		S (150)	121		190	36	INCL	(MB3) DODGE		OPP	69	
		T (165)	134		175	33	INCL	(MB3) DODGE		OPP	69	

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0716303		132%	74	0	258	50	INCL			OPP		
0725603		180%	100	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

G3 61-5/6.1

MER.14

5 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0714003		130%	75	0	361	70	INCL			OPP		
073503		132%	76	0	310	60	INCL			OPP		
0724703		180%	104	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		

G3 60-5/6.106

MER.15

5 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0714003		130%	75	0	361	70	INCL			OPP		
073503		132%	77	0	310	60	INCL			OPP		
0724703		180%	105	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		

G85-6/6.7 G90-6/6.70-0.73 MBT-660-6OA MBT-660S-6O

MER.16

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0712103		130%	81	0	361	70	INCL			OPP		
076003		132%	82	0	310	60	INCL			OPP		
0717803		140%	87	0	310	60	INCL			ENG		
0725303		180%	112	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		
077403		200%	125	0	310	60	INCL			ENG		

For complete part numbers, consult the PTO Series section (page 25)

Mercedes

G3 60-5/5.4

MER.17

5 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0714003		130%	84	0	361	70	INCL			OPP		
073503		132%	86	0	310	60	INCL			OPP		
0724703		180%	117	0	361	70	INCL	H.DUTY, ROTATED OUTPUT		OPP		

G3 65-8/9.29 G3 65-9/13.36 G3 90-8/9.29 G3 90-9/13.36

MER.18

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
070803		132%	70	0	310	60	INCL			OPP		

G141-9/14.57-1.0 G231-16/17.0 G241-16K/17.0-1.0

MER.19

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
07217K03		100%	71	85	516	100	INCL		L=252 700904 L=277 703704	ENG		
07233K03		104%	74	88	590	114	INCL		L=252 700904 L=277 703704	OPP		
07221K03		110%	68	82	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03		126%	89	107	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03		130%	92	110	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03		132%	94	112	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03		153%	109	130	310	60	INCL		L=252 700904 L=277 703704	OPP		
07240K03		180%	128	153	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		
07232K03		185%	131	157	369	71	INCL	BUILT-IN CLUTCH	L=252 700904 L=277 703704	OPP		
07223K03		200%	142	170	310	60	INCL		L=252 700904 L=277 703704	ENG		

Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

G131-9/14.57-1.0

MER.20

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
07217K03		100%	74	0	516	100	INCL		L=252 700904 L=277 703704	ENG		
07221K03		110%	71	0	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03		126%	93	0	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03		130%	96	0	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03		132%	98	0	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03		153%	113	0	310	60	INCL		L=252 700904 L=277 703704	OPP		
07240K03		180%	133	0	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		

Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

G221-9/16.15-1.0

MER.21

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
07217K03		100%	74	0	516	100	INCL		L=252 700904 L=277 703704	ENG		
07233K03		104%	77	0	590	114	INCL		L=252 700904 L=277 703704	OPP		
07221K03		110%	71	0	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03		126%	93	0	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03		130%	96	0	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03		132%	98	0	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03		153%	113	0	310	60	INCL		L=252 700904 L=277 703704	OPP		
07240K03		180%	133	0	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		
07232K03		185%	137	0	369	71	INCL	BUILT-IN CLUTCH	L=252 700904 L=277 703704	OPP		
07223K03		200%	148	0	310	60	INCL		L=252 700904 L=277 703704	ENG		

Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

For complete part numbers, consult the PTO Series section (page 25)

Mercedes

G125-16/14 **G155-16/14** **G180-16/14**

MER.22

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
075703		132%	107	126	310	60	INCL			OPP		
077603		165%	133	158	310	60	INCL			ENG		
075403		200%	161	192	310	60	INCL			ENG		

G281-12/14.93-1.0 NewAMT **G281-12K/14.93-1.0**

MER.23

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
07217K03		100%	81	103	516	100	INCL		L=293 7018104 L=268 7018304	ENG		
07233K03		104%	84	107	590	114	INCL		L=293 7018104 L=268 7018304	OPP		
07221K03		110%	89	113	369	71	INCL		L=293 7018104 L=268 7018304	OPP		
07225K03		126%	102	130	516	100	INCL		L=293 7018104 L=268 7018304	OPP		
07218K03		130%	105	134	420	81	INCL		L=293 7018104 L=268 7018304	OPP		
07219K03		132%	107	136	310	60	INCL		L=293 7018104 L=268 7018304	OPP		
07220K03		153%	124	158	310	60	INCL		L=293 7018104 L=268 7018304	OPP		
027240K03		180%	146	185	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=293 7018104 L=268 7018304	OPP		
07232K03		185%	150	191	369	71	INCL	BUILT-IN CLUTCH	L=293 7018104 L=268 7018304	OPP		
07223K03		200%	162	206	310	60	INCL		L=293 7018104 L=268 7018304	ENG		

Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

G210-16/14.2-0.83

MER.24

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
07217K03		100%	85	103	516	100	INCL		L=252 700904 L=277 703704	ENG		
07233K03		104%	88	107	590	114	INCL		L=252 700904 L=277 703704	OPP		
07221K03		110%	82	99	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03		126%	107	130	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03		130%	110	134	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03		132%	112	136	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03		153%	130	158	310	60	INCL		L=252 700904 L=277 703704	OPP		
027240K03		180%	153	185	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		
07232K03		185%	157	191	369	71	INCL	BUILT-IN CLUTCH	L=252 700904 L=277 703704	OPP		
07223K03		200%	170	206	310	60	INCL		L=252 700904 L=277 703704	ENG		

G125-9/15.9 G155-9/15.9

MER.25

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
075703		132%	114	0	310	60	INCL			OPP		
077603		165%	142	0	310	60	INCL			ENG		
075403		200%	172	0	310	60	INCL			ENG		

G2/24-5/7.31

MER.26

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
079103		133%	117	0	206	40	INCL			OPP		

For complete part numbers, consult the PTO Series section (page 25)

Mercedes

G28 **G32** **G33**

MER.27

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
075203		100%	90	0	140	27	INCL	SUPPORTED BY BALL BEARING		ENG		
075303		100%	90	0	140	27	INCL	SUPPORTED BY TAPER ROLLER BEARING		ENG		

NSG 370-6 **NSG 400-6** **TSG 360** **TSG 480**

MER.28

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
0717403		100%	90	0	140	27	INCL	SUPPORTED BY TAPER ROLLER BEARING		ENG		
0717503		100%	90	0	140	27	INCL	SUPPORTED BY BALL BEARING		ENG		

G200-16/11.9

MER.29

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
075703		132%	125	149	310	60	INCL			OPP		
077603		165%	157	186	310	60	INCL			ENG		
075403		200%	190	225	310	60	INCL			ENG		

G2/24-5/6.71

MER.30

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
079103		133%	127	0	206	40	INCL			OPP		3L 

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

G125-16/11.9 **G135-16/11.9** **G155-16/11.9** **G180-16/11.9**

MER.31

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
075703		132%	126	149	310	60	INCL			OPP		
077603		165%	158	186	310	60	INCL			ENG		
075403		200%	192	226	310	60	INCL			ENG		

G240-16/11.7 **G280-16/11.72-0.69 NewAMT** **G280-16K/11.72-0.69**

MER.32

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
07217K03		100%	103	124	516	100	INCL		L=252 700904 L=277 703704	ENG		
07233K03		104%	107	129	590	114	INCL		L=252 700904 L=277 703704	OPP		
07221K03		110%	113	136	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03		126%	130	156	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03		130%	134	161	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03		132%	136	164	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03		153%	158	190	310	60	INCL		L=252 700904 L=277 703704	OPP		
027240K03		180%	185	223	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		
07232K03		185%	191	229	369	71	INCL	BUILT-IN CLUTCH	L=252 700904 L=277 703704	OPP		
07223K03		200%	206	248	310	60	INCL		L=252 700904 L=277 703704	ENG		

Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

For complete part numbers, consult the PTO Series section (page 25)

Mercedes

G230-12/11.67-0.78 NewAMT **G230-16S/14.2-0.83** **G330-12K/11.64-0.78**
G230-12K/11.67-0.78 **G330-12/11.64-0.78 NewAMT**

MER.33

8 Bolts PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
07217K03	100%	103	132	516	100	INCL		L=252 700904 L=277 703704	ENG		
07233K03	104%	107	137	590	114	INCL		L=252 700904 L=277 703704	OPP		
07221K03	110%	113	145	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03	126%	130	166	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03	130%	134	172	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03	132%	136	174	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03	153%	158	202	310	60	INCL		L=252 700904 L=277 703704	OPP		
027240K03	180%	185	238	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		
07232K03	185%	191	244	369	71	INCL	BUILT-IN CLUTCH	L=252 700904 L=277 703704	OPP		
07223K03	200%	206	264	310	60	INCL		L=252 700904 L=277 703704	ENG		

Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

G260-16/9.75-0.57

MER.34

8 Bolts PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
07217K03	100%	124	150	516	100	INCL		L=252 700904 L=277 703704	ENG		
07233K03	104%	129	156	590	114	INCL		L=252 700904 L=277 703704	OPP		
07221K03	110%	119	144	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03	126%	156	189	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03	130%	161	195	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03	132%	164	198	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03	153%	190	230	310	60	INCL		L=252 700904 L=277 703704	OPP		
027240K03	180%	223	270	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		
07232K03	185%	229	278	369	71	INCL	BUILT-IN CLUTCH	L=252 700904 L=277 703704	OPP		
07223K03	200%	248	300	310	60	INCL		L=252 700904 L=277 703704	ENG		

Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

G211-12/14.93-1.0 NewAMT G211-12K/14.93-1.0

MER.35

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
07217K03		100%	81	103	516	100	INCL		L=252 700904 L=277 703704	ENG		
07233K03		104%	84	107	590	114	INCL		L=252 700904 L=277 703704	OPP		
07221K03		110%	89	113	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03		126%	102	130	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03		130%	105	134	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03		132%	107	136	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03		153%	124	158	310	60	INCL		L=252 700904 L=277 703704	OPP		
027240K03		180%	146	185	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		

Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

G211-16/17.0

MER.36

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
07217K03		100%	71	85	516	100	INCL		L=252 700904 L=277 703704	ENG		
07233K03		104%	74	88	590	114	INCL		L=252 700904 L=277 703704	OPP		
07221K03		110%	78	93	369	71	INCL		L=252 700904 L=277 703704	OPP		
07225K03		126%	89	107	516	100	INCL		L=252 700904 L=277 703704	OPP		
07218K03		130%	92	110	420	81	INCL		L=252 700904 L=277 703704	OPP		
07219K03		132%	94	112	310	60	INCL		L=252 700904 L=277 703704	OPP		
07220K03		153%	109	130	310	60	INCL		L=252 700904 L=277 703704	OPP		
027240K03		180%	128	153	361	70	INCL	H.DUTY, ROTA-TED OUTPUT	L=252 700904 L=277 703704	OPP		

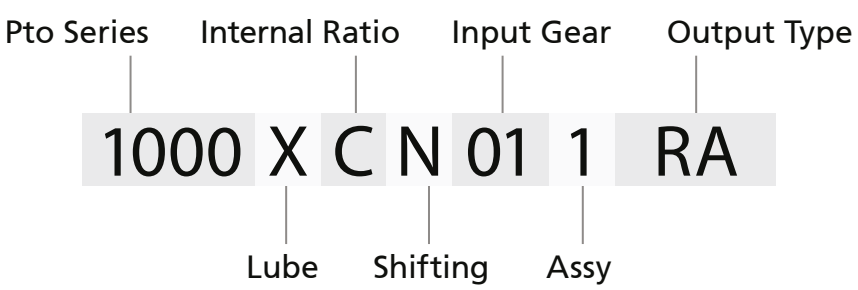
Important Note: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit. (See adapters).

For complete part numbers, consult the PTO Series section (page 25)

New Process Index

Transmission Model	Pag.
542-CD	**277**
542-CL	**275**
542-DD	**277**
542-DL	**276**
542-FD	**277**
542-FL	**276**
542-GD	**277**
542-GL	**275**

EXAMPLE:



Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

542-CL **542-GL**

NPR.04

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		21	250	47	INCL			ENG	01	
		C (73)		28	250	47	INCL			ENG	01	
		E (86)		34	225	43	INCL			ENG	01	
		J (95)		37	225	43	INCL			ENG	01	3L
		O (125)		48	195	37	INCL			ENG	01	
		R (137)		53	180	34	INCL			ENG	01	
		S (150)		58	162	31	INCL			ENG	01	
		T (165)		64	148	28	INCL			ENG	01	
	1000	B (55)		21	250	47	S3		6187S	OPP	36	
		C (73)		28	250	47	S3		6187S	OPP	36	
		E (86)		34	225	43	S3		6187S	OPP	36	
		J (95)		37	225	43	S3		6187S	OPP	36	1R
		O (125)		48	195	37	S3		6187S	OPP	36	
		R (137)		53	180	34	S3		6187S	OPP	36	
		S (150)		58	162	31	S3		6187S	OPP	36	
		T (165)		64	148	28	S3		6187S	OPP	36	
	3200	Z (40)		18	250	47	INCL			ENG	01	
		A (50)		22	250	47	INCL			ENG	01	
		B (55)		24	250	47	INCL			ENG	01	
		C (73)		32	250	47	INCL			ENG	01	
		E (86)		39	225	43	INCL			ENG	01	3L
		J (95)		42	225	43	INCL			ENG	01	
		O (125)		56	195	37	INCL			ENG	01	
		R (137)		61	180	34	INCL			ENG	01	
		S (150)		67	162	31	INCL			ENG	01	
		T (165)		73	148	28	INCL			ENG	01	
	3200	Z (40)		18	250	47	S3		6187S	OPP	36	
		A (50)		22	250	47	S3		6187S	OPP	36	
		B (55)		24	250	47	S3		6187S	OPP	36	
		C (73)		32	250	47	S3		6187S	OPP	36	
		E (86)		39	225	43	S3		6187S	OPP	36	1R
		J (95)		42	225	43	S3		6187S	OPP	36	
		O (125)		56	195	37	S3		6187S	OPP	36	
		R (137)		61	180	34	S3		6187S	OPP	36	
		S (150)		67	162	31	S3		6187S	OPP	36	
		T (165)		73	148	28	S3		6187S	OPP	36	
	6000	Forward (73)		32	150	28	INCL			BOTH	01	3L
		Reverse (83)		37	150	28	INCL			BOTH	01	
	6000	Forward (73)		32	150	28	S3		6187S	BOTH	36	1R
		Reverse (83)		37	150	28	S3		6187S	BOTH	36	

For complete part numbers, consult the PTO Series section (page 25)

New Process

542-DL **542-FL**

NPR.05

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		21	250	47	INCL			ENG	01	
		C (73)		28	250	47	INCL			ENG	01	
		E (86)		34	225	43	INCL			ENG	01	
		J (95)		37	225	43	INCL			ENG	01	3L
		O (125)		48	195	37	INCL			ENG	01	
		R (137)		53	180	34	INCL			ENG	01	
		S (150)		58	162	31	INCL			ENG	01	
		T (165)		64	148	28	INCL			ENG	01	
	1000	B (55)		20	250	47	INCL		GA6062	OPP	36	
		C (73)		27	250	47	INCL		GA6062	OPP	36	
		E (86)		32	225	43	INCL		GA6062	OPP	36	
		J (95)		35	225	43	INCL		GA6062	OPP	36	1R
		O (125)		46	195	37	INCL		GA6062	OPP	36	
		R (137)		50	180	34	INCL		GA6062	OPP	36	
		S (150)		55	162	31	INCL		GA6062	OPP	36	
		T (165)		61	148	28	INCL		GA6062	OPP	36	
	3200	Z (40)		18	250	47	INCL			ENG	01	
		A (50)		22	250	47	INCL			ENG	01	
		B (55)		24	250	47	INCL			ENG	01	
		C (73)		32	250	47	INCL			ENG	01	
		E (86)		39	225	43	INCL			ENG	01	3L
		J (95)		42	225	43	INCL			ENG	01	
		O (125)		56	195	37	INCL			ENG	01	
		R (137)		61	180	34	INCL			ENG	01	
		S (150)		67	162	31	INCL			ENG	01	
		T (165)		73	148	28	INCL			ENG	01	
	3200	Z (40)		18	250	47	INCL		GA6062	OPP	36	
		A (50)		22	250	47	INCL		GA6062	OPP	36	
		B (55)		24	250	47	INCL		GA6062	OPP	36	
		C (73)		32	250	47	INCL		GA6062	OPP	36	
		E (86)		39	225	43	INCL		GA6062	OPP	36	1R
		J (95)		42	225	43	INCL		GA6062	OPP	36	
		O (125)		56	195	37	INCL		GA6062	OPP	36	
		R (137)		61	180	34	INCL		GA6062	OPP	36	
		S (150)		67	162	31	INCL		GA6062	OPP	36	
		T (165)		73	148	28	INCL		GA6062	OPP	36	
	6000	Forward (73)		32	150	28	INCL			BOTH	01	3L
		Reverse (83)		37	150	28	INCL			BOTH	01	
	6000	Forward (73)		32	150	28	INCL		GA6062	BOTH	36	1R
		Reverse (83)		37	150	28	INCL		GA6062	BOTH	36	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

542-CD **542-DD** **542-FD** **542-GD** **NPR.07**

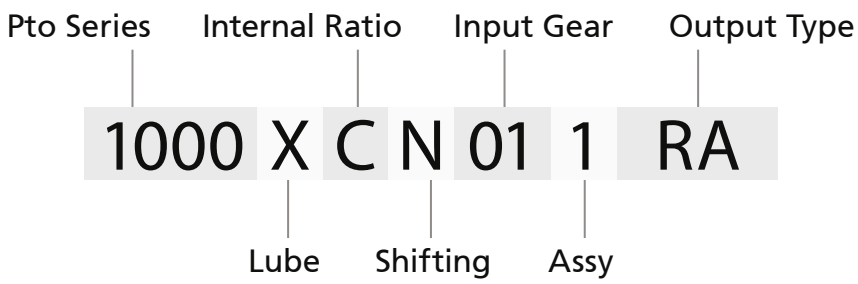
6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		25	250	47	INCL			ENG	01	
		C (73)		33	250	47	INCL			ENG	01	
		E (86)		40	225	43	INCL			ENG	01	
	1000	J (95)		43	225	43	INCL			ENG	01	3L
		O (125)		57	195	37	INCL			ENG	01	
		R (137)		62	180	34	INCL			ENG	01	
		S (150)		68	162	31	INCL			ENG	01	
		T (165)		75	148	28	INCL			ENG	01	
		B (55)		25	250	47	S3		6187S	OPP	36	
		C (73)		33	250	47	S3		6187S	OPP	36	
		E (86)		40	225	43	S3		6187S	OPP	36	
	1000	J (95)		43	225	43	S3		6187S	OPP	36	1R
		O (125)		57	195	37	S3		6187S	OPP	36	
		R (137)		62	180	34	S3		6187S	OPP	36	
		S (150)		68	162	31	S3		6187S	OPP	36	
		T (165)		75	148	28	S3		6187S	OPP	36	
		Z (40)		21	250	47	INCL			ENG	01	
		A (50)		26	250	47	INCL			ENG	01	
		B (55)		29	250	47	INCL			ENG	01	
		C (73)		38	250	47	INCL			ENG	01	
	3200	E (86)		46	225	43	INCL			ENG	01	3L
		J (95)		50	225	43	INCL			ENG	01	
		O (125)		65	195	37	INCL			ENG	01	
		R (137)		72	180	34	INCL			ENG	01	
		S (150)		78	162	31	INCL			ENG	01	
		T (165)		86	148	28	INCL			ENG	01	
		Z (40)		21	250	47	S3		6187S	OPP	36	
		A (50)		26	250	47	S3		6187S	OPP	36	
		B (55)		29	250	47	S3		6187S	OPP	36	
		C (73)		38	250	47	S3		6187S	OPP	36	
	3200	E (86)		46	225	43	S3		6187S	OPP	36	1R
		J (95)		50	225	43	S3		6187S	OPP	36	
		O (125)		65	195	37	S3		6187S	OPP	36	
		R (137)		72	180	34	S3		6187S	OPP	36	
		S (150)		78	162	31	S3		6187S	OPP	36	
		T (165)		86	148	28	S3		6187S	OPP	36	
	6000	Forward (73)		38	150	28	INCL			BOTH	01	3L
		Reverse (83)		43	150	28	INCL			BOTH	01	
	6000	Forward (73)		38	150	28	S3		6187S	BOTH	36	1R
		Reverse (83)		43	150	28	S3		6187S	BOTH	36	

For complete part numbers, consult the PTO Series section (page 25)

New Venture Index

Transmission Model	Pag.
241 HD Trans case	**276**
4500 HD (DODGE)	**278**
NV-021	**279**
NV-4500 (CHEVY - After FEB/94)	**278**
NV-4500 (CHEVY - BEFORE FEB/94)	**277**
NV-4500 (DODGE - After FEB/94)	**278**
NVG-4500 (CHEVY - After FEB/94)	**278**


EXAMPLE:



New Venture

241 HD Trans case

NVR.01

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		35	250	49	INCL	(NV1)	GA6032	ENG	01	
		C (73)		46	250	49	INCL	(NV1)	GA6032	ENG	01	
		E (86)		55	225	44	INCL	(NV1)	GA6032	ENG	01	
		J (95)		60	225	44	INCL	(NV1)	GA6032	ENG	01	
		O (125)		79	200	39	INCL	(NV1)	GA6032	ENG	01	
		R (137)		87	200	39	INCL	(NV1)	GA6032	ENG	01	
		S (150)		95	190	37	INCL	(NV1)	GA6032	ENG	01	
		T (165)		105	175	34	INCL	(NV1)	GA6032	ENG	01	
	3200	Z (40)		25	250	49	INCL	(NV1)	GA6032	ENG	01	
		A (50)		32	250	49	INCL	(NV1)	GA6032	ENG	01	
		B (55)		35	250	49	INCL	(NV1)	GA6032	ENG	01	
		C (73)		46	250	49	INCL	(NV1)	GA6032	ENG	01	
		E (86)		55	225	44	INCL	(NV1)	GA6032	ENG	01	
		J (95)		60	225	44	INCL	(NV1)	GA6032	ENG	01	
		O (125)		79	200	39	INCL	(NV1)	GA6032	ENG	01	
		R (137)		87	200	39	INCL	(NV1)	GA6032	ENG	01	
		S (150)		95	190	37	INCL	(NV1)	GA6032	ENG	01	
		T (165)		105	175	34	INCL	(NV1)	GA6032	ENG	01	
	6000	Forward (73)		46	150	30	INCL	(NV1)	GA6032	BOTH	01	
		Reverse (83)		53	150	30	INCL	(NV1)	GA6032	BOTH	01	

FOOT NOTES:




NV1: Speeds shown with main transmission in direct drive. By the shifting of the main transmission, Reverse and all ratios of the transmission are available through the PTO.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

NV-4500 (CHEVY - BEFORE FEB/94)

NVR.02

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		41	250	49	INCL	(NV3,4,5)		OPP	20	
		C (73)		54	250	49	INCL	(NV3,4,5)		OPP	20	
		E (86)		65	225	44	INCL	(NV3,4,5)		OPP	20	
		J (95)		71	225	44	INCL	(NV3,4,5)		OPP	20	
		O (125)		93	200	39	INCL	(NV3,4,5)		OPP	20	
		R (137)		102	200	39	INCL	(NV3,4,5)		OPP	20	
		S (150)		112	190	37	INCL	(NV3,4,5)		OPP	20	
		T (165)		123	175	34	INCL	(NV3,4,5)		OPP	20	
3200		Z (40)		30	250	49	INCL	(NV3,4,5)		OPP	20	
		A (50)		37	250	49	INCL	(NV3,4,5)		OPP	20	
		B (55)		41	250	49	INCL	(NV3,4,5)		OPP	20	
		C (73)		54	250	49	INCL	(NV3,4,5)		OPP	20	
		E (86)		65	225	44	INCL	(NV3,4,5)		OPP	20	
		J (95)		71	225	44	INCL	(NV3,4,5)		OPP	20	
		O (125)		93	200	39	INCL	(NV3,4,5)		OPP	20	
		R (137)		102	200	39	INCL	(NV3,4,5)		OPP	20	
		S (150)		112	190	37	INCL	(NV3,4,5)		OPP	20	
		T (165)		123	175	34	INCL	(NV3,4,5)		OPP	20	
6000		Forward (73)		54	150	30	INCL	(NV3,4,5)		BOTH	20	
		Reverse (83)		62	150	30	INCL	(NV3,4,5)		BOTH	20	

FOOT NOTES:

NV3: Right side exhaust interference with GM Vortec gas engines.

NV4: Driveshaft interference on 4 X 4 vehicles on left side.

NV5: If magnet is found on inside of the aperture cover removed for PTO installation, then move that cover to other side.




For complete part numbers, consult the PTO Series section (page 25)

New Venture

4500 HD (DODGE)
NV-4500 (CHEVY - After FEB/94)

NV-4500 (DODGE - After FEB/94)
NVG-4500 (CHEVY - After FEB/94)

NVR.03

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		43	250	49	INCL	(NV2,3,5)		OPP	20	
		C (73)		58	250	49	INCL	(NV2,3,5)		OPP	20	
		E (86)		69	225	44	INCL	(NV2,3,5)		OPP	20	
		J (95)		75	225	44	INCL	(NV2,3,5)		OPP	20	
		O (125)		99	200	39	INCL	(NV2,3,5)		OPP	20	
		R (137)		108	200	39	INCL	(NV2,3,5)		OPP	20	
		S (150)		118	190	37	INCL	(NV2,3,5)		OPP	20	
		T (165)		130	175	34	INCL	(NV2,3,5)		OPP	20	
	3200	Z (40)		32	250	49	INCL	(NV2,3,5)		OPP	20	
		A (50)		39	250	49	INCL	(NV2,3,5)		OPP	20	
		B (55)		43	250	49	INCL	(NV2,3,5)		OPP	20	
		C (73)		58	250	49	INCL	(NV2,3,5)		OPP	20	
		E (86)		69	225	44	INCL	(NV2,3,5)		OPP	20	
		J (95)		75	225	44	INCL	(NV2,3,5)		OPP	20	
		O (125)		99	200	39	INCL	(NV2,3,5)		OPP	20	
		R (137)		108	200	39	INCL	(NV2,3,5)		OPP	20	
		S (150)		118	190	37	INCL	(NV2,3,5)		OPP	20	
		T (165)		130	175	34	INCL	(NV2,3,5)		OPP	20	
	6000	Forward (73)		58	150	30	INCL	(NV2,4,5)		BOTH	20	
		Reverse (83)		65	150	30	INCL	(NV2,4,5)		BOTH	20	

FOOT NOTES:

NV2: Chevy/GMC build date of 2/17/94 and later.

NV3: Right side exhaust interference with GM Vortec gas engines.

NV4: Driveshaft interference on 4 X 4 vehicles on left side.

NV5: If magnet is found on inside of the aperture cover removed for PTO installation, then move that cover to other side.



For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

NV-021

NVR.05

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		95	250	49	INCL	(NV1)	GA6032	ENG	01	
		C (73)		126	250	49	INCL	(NV1)	GA6032	ENG	01	
		E (86)		150	225	44	INCL	(NV1)	GA6032	ENG	01	
		J (95)		164	225	44	INCL	(NV1)	GA6032	ENG	01	
		O (125)		216	200	39	INCL	(NV1)	GA6032	ENG	01	
		R (137)		237	200	39	INCL	(NV1)	GA6032	ENG	01	
		S (150)		259	190	37	INCL	(NV1)	GA6032	ENG	01	
		T (165)		285	175	34	INCL	(NV1)	GA6032	ENG	01	
3200		Z (40)		69	250	49	INCL	(NV1)	GA6032	ENG	01	
		A (50)		86	250	49	INCL	(NV1)	GA6032	ENG	01	
		B (55)		95	250	49	INCL	(NV1)	GA6032	ENG	01	
		C (73)		126	250	49	INCL	(NV1)	GA6032	ENG	01	
		E (86)		150	225	44	INCL	(NV1)	GA6032	ENG	01	
		J (95)		164	225	44	INCL	(NV1)	GA6032	ENG	01	
		O (125)		216	200	39	INCL	(NV1)	GA6032	ENG	01	
		R (137)		237	200	39	INCL	(NV1)	GA6032	ENG	01	
		S (150)		259	190	37	INCL	(NV1)	GA6032	ENG	01	
		T (165)		285	175	34	INCL	(NV1)	GA6032	ENG	01	
6000		Forward (73)		126	150	30	INCL	(NV1)	GA6032	BOTH	01	
		Reverse (83)		143	150	30	INCL	(NV1)	GA6032	BOTH	01	

FOOT NOTES:

NV1: Speeds shown with main transmission in direct drive. By the shifting of the main transmission, Reverse and all ratios of the transmission are available through the PTO.

For complete part numbers, consult the PTO Series section (page 25)

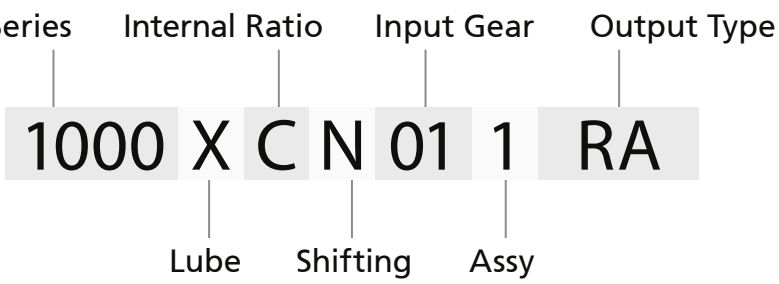
Rockwell-ZF-Meritor Index

Transmission Model	Pag.
M-11F9A-E11	284
M-11F9A-S11	284
M-11F10A-E11	284
M-11F10A-S11	284
M-11G9A-D11	284
M-11G9A-E11	284
M-11G9A-M11	284
M-11G9A-S11	284
M-11G10A-D11	284
M-11G10A-E11	284
M-11G10A-M11	284
M-11G10A-S11	284
M-12F9A-E12	284
M-12F9A-S12	284
M-12F10A-E12	284
M-12F10A-S12	284
M-12G9A-D12	284
M-12G9A-E12	284
M-12G9A-M12	284
M-12G9A-S12	284
M-12G10A-D12	284
M-12G10A-E12	284
M-12G10A-M12	284
M-12G10A-S12	284
M-13F9A-E13	284
M-13F9A-S13	284
M-13F10A-E13	284
M-13F10A-S13	284
M-13G9A-D13	284
M-13G9A-E13	284
M-13G9A-M13	284
M-13G9A-S13	284
M-13G10A-D13	284
M-13G10A-E13	284
M-13G10A-M13	284
M-13G10A-S13	284
M-13Z12A-A13	296
M-14F9A-E14	284
M-14F9A-S14	284
M-14F10A-E14	284
M-14F10A-M16	284
M-14F10A-S14	284
M-14F10A-S15	284

Transmission Model	Pag.
M-14G9A-D14	284
M-14G9A-E14	284
M-14G9A-M14	284
M-14G9A-S14	284
M-14G10A-D14	284
M-14G10A-D16	284
M-14G10A-E14	284
M-14G10A-E16	284
M-14G10A-M14	284
M-14G10A-M16	284
M-14G10A-S14	284
M-14G10A-S16	284
M-14Z12A-A14	296
M-15F10A-E15	284
M-15F10A-S15	284
M-15G9A-D15	284
M-15G9A-E15	284
M-15G9A-M15	284
M-15G9A-S15	284
M-15G10A-D15	284
M-15G10A-E15	284
M-15G10A-M15	284
M-15G10A-S15	284
MO-11F9B-E11	287
MO-11F9B-S11	287
MO-11F10A-S11	293
MO-11F10C-E11	290
MO-11F10C-S11	290
MO-11G9B-D11	287
MO-11G9B-E11	287
MO-11G9B-M11	287
MO-11G9B-S11	287
MO-11G9R-M11	293
MO-11G10A-D11	293
MO-11G10A-E11	293
MO-11G10A-M11	293
MO-11G10A-S11	293
MO-11G10C-D11	290
MO-11G10C-E11	290
MO-11G10C-M11	290
MO-11G10C-S11	290
MO-12F9A-E12	293
MO-12F9A-S12	293

Transmission Model	Pag.
MO-12F9B-E12	287
MO-12F9B-S12	287
MO-12F10A-E12	293
MO-12F10A-S12	293
MO-12F10C-E12	290
MO-12F10C-S12	290
MO-12G9A-D12	293
MO-12G9A-E12	293
MO-12G9A-M12	293
MO-12G9A-S12	293
MO-12G9B-D12	287
MO-12G9B-E12	287
MO-12G9B-M12	287
MO-12G9B-S12	287
MO-12G9R-M12	293
MO-12G10A-D12	293
MO-12G10A-E12	293
MO-12G10A-M12	293
MO-12G10A-S12	293
MO-12G10C-D12	290
MO-12G10C-E12	290
MO-12G10C-M12	290
MO-12G10C-S12	290
MO-13F9A-E13	293
MO-13F9A-S13	293
MO-13F9B-E13	287
MO-13F9B-S13	287
MO-13F10A-E13	293
MO-13F10A-S13	293
MO-13F10C-E13	290
MO-13F10C-S13	290
MO-13G9A-D13	293
MO-13G9A-E13	293
MO-13G9A-M13	293
MO-13G9A-S13	293
MO-13G9B-D13	287
MO-13G9B-E13	287
MO-13G9B-M13	287
MO-13G9B-S13	287
MO-13G9R-M13	293
MO-13G10A-D13	293
MO-13G10A-E13	293
MO-13G10A-M13	293

EXAMPLE:



Rockwell-ZF-Meritor Index

Transmission Model	Pag.
MO-13G10A-S13	293
MO-13G10C-D13	290
MO-13G10C-E13	290
MO-13G10C-M13	290
MO-13G10C-S13	290
MO-13Z12A-A13	296
MO-13Z16A-A13	296
MO-14F9A-E14	293
MO-14F9A-S14	293
MO-14F9B-E14	287
MO-14F9B-S14	287
MO-14F10A-E14	293
MO-14F10A-M16	293
MO-14F10A-S14	293
MO-14F10C-E14	290
MO-14F10C-M16	290
MO-14F10C-S14	290
MO-14G9A-D14	293
MO-14G9A-E14	293
MO-14G9A-M14	293
MO-14G9A-S14	293
MO-14G9B-D14	287
MO-14G9B-E14	287
MO-14G9B-M14	287
MO-14G9B-S14	287
MO-14G9R-M14	293
MO-14G10A-D14	293
MO-14G10A-D16	293
MO-14G10A-E14	293
MO-14G10A-E16	293
MO-14G10A-M14	293
MO-14G10A-M16	293
MO-14G10A-S14	293
MO-14G10A-S16	293
MO-14G10C-D14	290
MO-14G10C-D16	290
MO-14G10C-E14	290
MO-14G10C-E16	290
MO-14G10C-M14	290
MO-14G10C-M16	290
MO-14G10C-S14	290
MO-14G10C-S16	290
MO-14Z12A-A14	296
MO-14Z16A-A14	296
MO-15F9B-E15	287
MO-15F9B-S15	287
MO-15F10A-E15	293
MO-15F10A-S15	293
MO-15F10C-E15	290
MO-15F10C-S15	290
MO-15G9B-D15	287
MO-15G9B-E15	287
MO-15G9B-M15	287
MO-15G9B-S15	287
MO-15G10A-D15	293
MO-15G10A-E15	293
MO-15G10A-M15	293
MO-15G10A-S15	293
MO-15G10C-D15	290
MO-15G10C-E15	290
MO-15G10C-M15	290
MO-15G10C-S15	290
MO-15Z12A-A15	296
MO-15Z16A-A15	296
MO-16F10A-E16	293
MO-16F10A-S16	293
MO-16F10C-D18	290

Transmission Model	Pag.
MO-16F10C-E18	290
MO-16F10C-M18	290
MO-16F10C-S18	290
MO-16G10A-D16	293
MO-16G10A-E16	293
MO-16G10A-M16	293
MO-16G10A-S16	293
MO-16G10C-D16	290
MO-16G10C-D18	290
MO-16G10C-E16	290
MO-16G10C-E18	290
MO-16G10C-M16	290
MO-16G10C-M18	290
MO-16G10C-S16	290
MO-16G10C-S18	290
MO-16Z12A-A16	296
MO-16Z16A-A16	296
MO-17G10C-D17	290
MO-17G10C-D19	290
MO-17G10C-E17	290
MO-17G10C-E19	290
MO-17G10C-M17	290
MO-17G10C-M19	290
MO-17G10C-S17	290
MO-17G10C-S19	290
MO-18G10C-D18	290
MO-18G10C-D20	290
MO-18G10C-E18	290
MO-18G10C-E20	290
MO-18G10C-M18	290
MO-18G10C-M20	290
MO-18G10C-S18	290
MO-18G10C-S20	290
RD10-145A	284
RE9-115A	284
RE9-125A	284
RE9-135A	284
RE9-145A	284
RE9-155A	284
RE10-115A	284
RE10-125A	284
RE10-135A	284
RE10-145A	284
RE10-155A	284
REO9-115B	287
REO9-125A	293
REO9-125B	287
REO9-135A	293
REO9-135B	287
REO9-145A	293
REO9-145B	287
REO9-155B	287
REX9-115B	287
REX9-115R	287
REX9-125A	293
REX9-125B	287
REX9-125R	287
REX9-135A	293
REX9-135B	287
REX9-135R	287
REX9-145A	293
REX9-145B	287
REX9-145R	287
REX9-155B	287
REX10-115A	293
REX10-115C	290
REX10-125A	293

Transmission Model	Pag.
REX10-125C	290
REX10-135A	293
REX10-135C	290
REX10-145A	293
REX10-145C	290
REX10-155A	293
REX10-155C	290
REX10-165A	293
REX10-165C	290
RM9-115A	284
RM9-125A	284
RM9-135A	284
RM9-145A	284
RM9-155A	284
RM10-115A	284
RM10-125A	284
RM10-135A	284
RM10-145A	284
RM10-145AT	284
RM10-155A	284
RMO9-115A	293
RMO9-115B	287
RMO9-115R	293
RMO9-125A	293
RMO9-125B	287
RMO9-125R	293
RMO9-135A	293
RMO9-135B	287
RMO9-135R	293
RMO9-145A	293
RMO9-145B	287
RMO9-145R	293
RMO9-155B	287
RMO10-115A	293
RMO10-125A	293
RMO10-135A	293
RMO10-145A	293
RMO10-145AT	293
RMO10-155A	293
RMO13-145A	284
RMX9-115B	287
RMX9-115R	293
RMX9-125A	293
RMX9-125B	287
RMX9-125R	293
RMX9-135A	293
RMX9-135B	287
RMX9-135R	293
RMX9-145A	293
RMX9-145B	287
RMX9-145R	293
RMX9-155B	287
RMX10-115A	293
RMX10-115C	290
RMX10-125A	293
RMX10-125C	290
RMX10-135A	293
RMX10-135C	290
RMX10-145A	293
RMX10-145C	290
RMX10-145CT	290
RMX10-155A	293
RMX10-155C	290
RMX10-165A	293
RMX10-165C	290
RMX10-165CT	290
RMX13-145A	284

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Transmission Model	Pag.

RS9-115A **284**
RS9-125A **284**
RS9-135A **284**
RS9-145A **284**
RS9-155A **284**
RS10-115A **284**
RS10-125A **284**
RS10-135A **284**
RS10-145A **284**
RS10-155A **284**
RSO9-115B **287**
RSO9-125B **287**
RSO9-135B **287**
RSO9-145B **287**
RSO9-155B **287**
RSX9-115B **287**
RSX9-115C **287**
RSX9-115R **287**
RSX9-125A **293**
RSX9-125B **287**
RSX9-125C **287**
RSX9-125R **293**
RSX9-135A **293**
RSX9-135B **287**
RSX9-135C **287**
RSX9-135R **293**
RSX9-145A **293**
RSX9-145B **287**
RSX9-145C **287**
RSX9-145R **293**
RSX9-155B **287**
RSX9-155C **287**
RSX9-165C **287**
RSX10-115A **293**
RSX10-115C **290**
RSX10-125A **293**
RSX10-125C **290**
RSX10-135A **293**
RSX10-135C **290**
RSX10-145A **293**
RSX10-145C **290**
RSX10-155A **293**
RSX10-155C **290**
RSX10-165A **293**
RSX10-165C **290**

Rockwell-ZF-Meritor

RZM.01

M-11F10A-E11
M-11F10A-S11
M-11F9A-E11
M-11F9A-S11
M-11G10A-D11
M-11G10A-E11
M-11G10A-M11
M-11G10A-S11
M-11G9A-D11
M-11G9A-E11
M-11G9A-M11
M-11G9A-S11
M-12F10A-E12
M-12F10A-S12
M-12F9A-E12
M-12F9A-S12
M-12G10A-D12
M-12G10A-E12
M-12G10A-M12
M-12G10A-S12
M-12G9A-D12
M-12G9A-E12
M-12G9A-M12
M-12G9A-S12
M-13F10A-E13
M-13F10A-S13
M-13F9A-E13
M-13F9A-S13
M-13G10A-D13
M-13G10A-E13
M-13G10A-M13
M-13G10A-S13
M-13G9A-D13
M-13G9A-E13
M-13G9A-M13
M-13G9A-S13
M-14F10A-E14
M-14F10A-M16
M-14F10A-S14
M-14F10A-S15
M-14F9A-E14
M-14F9A-S14
M-14G10A-D14
M-14G10A-D16
M-14G10A-E14
M-14G10A-E16
M-14G10A-M14
M-14G10A-M16
M-14G10A-S14
M-14G10A-S16
M-14G9A-D14
M-14G9A-E14
M-14G9A-M14
M-14G9A-S14
M-15F10A-E15
M-15F10A-S15
M-15G10A-D15
M-15G10A-E15
M-15G10A-M15
M-15G10A-S15
M-15G9A-D15
M-15G9A-E15
M-15G9A-M15
M-15G9A-S15
RD10-145A
RE10-115A
RE10-125A
RE10-135A
RE10-145A
RE10-155A
RE9-115A
RE9-125A
RE9-135A
RE9-145A
RE9-155A
RM10-115A
RM10-125A
RM10-135A
RM10-145A
RM10-145AT
RM10-155A
RM9-115A
RM9-125A
RM9-135A
RM9-145A
RM9-155A
RMO13-145A
RMX13-145A
RS10-115A
RS10-125A
RS10-135A
RS10-145A
RS10-155A
RS9-115A
RS9-125A
RS9-135A
RS9-145A
RS9-155A

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		85	250	49	INCL	(RK1,2)		OPP	01	
		C (73)		113	250	49	INCL	(RK1,2)		OPP	01	
		E (86)		135	225	44	INCL	(RK1,2)		OPP	01	
		J (95)		147	225	44	INCL	(RK1,2)		OPP	01	 1R
		O (125)		194	200	39	INCL	(RK1,2)		OPP	01	
		R (137)		212	200	39	INCL	(RK1,2)		OPP	01	
		S (150)		233	190	37	INCL	(RK1,2)		OPP	01	
		T (165)		256	175	34	INCL	(RK1,2)		OPP	01	
	3200	Z (40)		59	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		A (50)		74	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		B (55)		85	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		C (73)		113	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		E (86)		135	225	44	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	 1R
		J (95)		147	225	44	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		O (125)		194	200	39	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		R (137)		212	200	39	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		S (150)		233	190	37	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		T (165)		256	175	34	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
	6000	Forward (73)		113	150	30	INCL	(RK2)		BOTH	01	 1R
		Reverse (83)		129	150	30	INCL	(RK2)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Rockwell-ZF-Meritor

RZM.01

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		74	250	49	INCL			OPP	O1	 ↑ 1B
		B (55)		85	250	49	INCL			OPP	O1	
		C (73)		113	250	49	INCL			OPP	O1	
		E (86)		135	225	44	INCL			OPP	O1	
		J (95)		147	225	44	INCL			OPP	O1	
		O (125)		194	200	39	INCL			OPP	O1	
		R (137)		212	200	39	INCL			OPP	O1	
		S (150)		233	190	37	INCL			OPP	O1	
		T (165)		256	175	34	INCL			OPP	O1	
	3800	A (50)		74	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	 ↑ 1B
		B (55)		85	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	
		C (73)		113	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	
		E (86)		135	225	44	INCL	(CLUTCH SHIFT)		OPP	O1	
		J (95)		147	225	44	INCL	(CLUTCH SHIFT)		OPP	O1	
		O (125)		194	200	39	INCL	(CLUTCH SHIFT)		OPP	O1	
		R (137)		212	200	39	INCL	(CLUTCH SHIFT)		OPP	O1	
		S (150)		233	190	37	INCL	(CLUTCH SHIFT)		OPP	O1	
		T (165)		256	175	34	INCL	(CLUTCH SHIFT)		OPP	O1	
	4100	B (57)		85	450	87	INCL	(RK3)		OPP	O1	 ↑ 1B
		C (70)		104	470	90	INCL	(RK3)		OPP	O1	
		E (86)		128	470	90	INCL	(RK3)		OPP	O1	
		J (105)		156	400	77	INCL	(RK3)		OPP	O1	
	4250	Output 1 C (96)		102	420	80	INCL			OPP	O1	 ↑ 1B
		Output 2 B (89)		95	420	80	INCL			OPP	O1	
		Output 1 E (112)		120	400	76.5	INCL			OPP	O1	
		Output 2 C (104)		111	420	80	INCL			OPP	O1	
		Output 1 J (132)		141	380	73	INCL			OPP	O1	
		Output 2 E (121)		129	400	76.5	INCL			OPP	O1	
		Output 1 O (168)			350	67	INCL			OPP	O1	
		Output 2 J (152)			380	73	INCL			OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Rockwell-ZF-Meritor

RZM.01

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		113	150	30	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		129	150	30	INCL			BOTH	O1	
	8000	Forward (40)		64	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		76	500	95	INCL			BOTH	O1	
	8500	B (57)		59	500	95	INCL				O1	
		C (70)		78	500	95	INCL				O1	
		E (86)		93	480	90	INCL				O1	
		J (105)		115	450	86	INCL				O1	 ↑ 1B
		O (127)		133	400	76	INCL				O1	
		R (137)		146	360	68	INCL				O1	
		S (150)		160	320	62	INCL				O1	
		T (165)		176	280	54	INCL				O1	

FOOT NOTES:

RK1: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

RK2: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter reverses PTO output rotation.

RK3: Possible internal transmission gear interference with 4100 Series "J" & "O" ratios. Check before installing PTO.



For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Rockwell-ZF-Meritor

RZM.02

MO-11F9B-E11
MO-11F9B-S11
MO-11G9B-D11
MO-11G9B-E11
MO-11G9B-M11
MO-11G9B-S11
MO-12F9B-E12
MO-12F9B-S12
MO-12G9B-D12
MO-12G9B-E12
MO-12G9B-M12
MO-12G9B-S12
MO-13F9B-E13
MO-13F9B-S13
MO-13G9B-D13
MO-13G9B-E13
MO-13G9B-M13
MO-13G9B-S13
MO-14F9B-E14
MO-14F9B-S14
MO-14G9B-D14
MO-14G9B-E14
MO-14G9B-M14
MO-14G9B-S14
MO-15F9B-E15
MO-15F9B-S15
MO-15G9B-D15
MO-15G9B-E15
MO-15G9B-M15
MO-15G9B-S15
REO9-115B
REO9-125B
REO9-135B
REO9-145B
REO9-155B
REX9-115B
REX9-115R
REX9-125B
REX9-125R
REX9-135B
REX9-135R
REX9-145B
REX9-145R
REX9-155B
RMO9-115B
RMO9-125B
RMO9-135B
RMO9-145B
RMO9-155B
RMX9-115B
RMX9-125B
RMX9-135B
RMX9-145B
RMX9-155B
RSO9-115B
RSO9-125B
RSO9-135B
RSO9-145B
RSO9-155B
RSX9-115B
RSX9-115C
RSX9-115R
RSX9-125B
RSX9-125C
RSX9-135B
RSX9-135C
RSX9-145B
RSX9-145C
RSX9-155B
RSX9-155C
RSX9-165C

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		98	250	49	INCL	(RK1,2)		OPP	01	
		C (73)		130	250	49	INCL	(RK1,2)		OPP	01	
		E (86)		155	225	44	INCL	(RK1,2)		OPP	01	
		J (95)		169	225	44	INCL	(RK1,2)		OPP	01	
		O (125)		223	200	39	INCL	(RK1,2)		OPP	01	
		R (137)		244	200	39	INCL	(RK1,2)		OPP	01	
		S (150)		267	190	37	INCL	(RK1,2)		OPP	01	
		T (165)		294	175	34	INCL	(RK1,2)		OPP	01	
	3200	Z (40)		77	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		A (50)		96	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		B (55)		98	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		C (73)		130	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		E (86)		155	225	44	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		J (95)		169	225	44	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		O (125)		223	200	39	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		R (137)		244	200	39	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		S (150)		267	190	37	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		T (165)		294	175	34	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
	6000	Forward (73)		130	150	30	INCL	(RK2)		BOTH	01	
		Reverse (83)		148	150	30	INCL	(RK2)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Rockwell-ZF-Meritor

RZM.02

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		96	250	49	INCL			OPP	O1	 ↑ 1B
		B (55)		98	250	49	INCL			OPP	O1	
		C (73)		130	250	49	INCL			OPP	O1	
		E (86)		155	225	44	INCL			OPP	O1	
		J (95)		169	225	44	INCL			OPP	O1	
		O (125)		223	200	39	INCL			OPP	O1	
		R (137)		244	200	39	INCL			OPP	O1	
		S (150)		267	190	37	INCL			OPP	O1	
		T (165)		294	175	34	INCL			OPP	O1	
	3800	A (50)		96	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	 ↑ 1B
		B (55)		98	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	
		C (73)		130	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	
		E (86)		155	225	44	INCL	(CLUTCH SHIFT)		OPP	O1	
		J (95)		169	225	44	INCL	(CLUTCH SHIFT)		OPP	O1	
		O (125)		223	200	39	INCL	(CLUTCH SHIFT)		OPP	O1	
		R (137)		244	200	39	INCL	(CLUTCH SHIFT)		OPP	O1	
		S (150)		267	190	37	INCL	(CLUTCH SHIFT)		OPP	O1	
		T (165)		294	175	34	INCL	(CLUTCH SHIFT)		OPP	O1	
	4100	B (57)		97	450	87	INCL	(RK3)		OPP	O1	 ↑ 1B
		C (70)		119	470	90	INCL	(RK3)		OPP	O1	
		E (86)		147	470	90	INCL	(RK3)		OPP	O1	
		J (105)		179	400	77	INCL	(RK3)		OPP	O1	
	4250	Output 1 C (96)		118	420	80	INCL			OPP	O1	 ↑ 1B
		Output 2 B (89)		109	420	80	INCL			OPP	O1	
		Output 1 E (112)		138	400	76.5	INCL			OPP	O1	
		Output 2 C (104)		127	420	80	INCL			OPP	O1	
		Output 1 J (132)		161	380	73	INCL			OPP	O1	
		Output 2 E (121)		148	400	76.5	INCL			OPP	O1	
		Output 1 O (168)			350	67	INCL			OPP	O1	
		Output 2 J (152)			380	73	INCL			OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

RZM.02

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		130	150	30	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		148	150	30	INCL			BOTH	O1	
	8000	Forward (40)		73	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		87	500	95	INCL			BOTH	O1	
	8500	B (57)		67	500	95	INCL				O1	
		C (70)		89	500	95	INCL				O1	
		E (86)		107	480	90	INCL				O1	
		J (105)		132	450	86	INCL				O1	 ↑ 1B
		O (127)		153	400	76	INCL				O1	
		R (137)		168	360	68	INCL				O1	
		S (150)		184	320	62	INCL				O1	
		T (165)		202	280	54	INCL				O1	

FOOT NOTES:

RK1: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

RK2: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter reverses PTO output rotation.


RK3: Possible internal transmission gear interference with 4100 Series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Rockwell-ZF-Meritor

RZM.03

MO-11F10C-E11
MO-11F10C-S11
MO-11G10C-D11
MO-11G10C-E11
MO-11G10C-M11
MO-11G10C-S11
MO-12F10C-E12
MO-12F10C-S12
MO-12G10C-D12
MO-12G10C-E12
MO-12G10C-M12
MO-12G10C-S12
MO-13F10C-E13
MO-13F10C-S13
MO-13G10C-D13
MO-13G10C-E13
MO-13G10C-M13
MO-13G10C-S13
MO-14F10C-E14
MO-14F10C-M16
MO-14F10C-S14
MO-14G10C-D14
MO-14G10C-D16
MO-14G10C-E14
MO-14G10C-E16
MO-14G10C-M14
MO-14G10C-M16
MO-14G10C-S14
MO-14G10C-S16
MO-15F10C-E15
MO-15F10C-S15
MO-15G10C-D15
MO-15G10C-E15
MO-15G10C-M15
MO-15G10C-S15
MO-16F10C-D18
MO-16F10C-E18
MO-16F10C-M18
MO-16F10C-S18
MO-16G10C-D16
MO-16G10C-D18
MO-16G10C-E16
MO-16G10C-E18
MO-16G10C-M16
MO-16G10C-M18
MO-16G10C-S16
MO-16G10C-S18
MO-17G10C-D17
MO-17G10C-D19
MO-17G10C-E17
MO-17G10C-E19
MO-17G10C-M17
MO-17G10C-M19
MO-17G10C-S17
MO-17G10C-S19
MO-18G10C-D18
MO-18G10C-D20
MO-18G10C-E18
MO-18G10C-E20
MO-18G10C-M18
MO-18G10C-M20
MO-18G10C-S18
MO-18G10C-S20
REX10-115C
REX10-125C
REX10-135C
REX10-145C
REX10-155C
REX10-165C
RMX10-115C
RMX10-125C
RMX10-135C
RMX10-145C
RMX10-145CT
RMX10-155C
RMX10-165C
RMX10-165CT
RSX10-115C
RSX10-125C
RSX10-135C
RSX10-145C
RSX10-155C
RSX10-165C

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		110	250	49	INCL	(RK1,2)		OPP	01	
		C (73)		147	250	49	INCL	(RK1,2)		OPP	01	
		E (86)		175	225	44	INCL	(RK1,2)		OPP	01	
		J (95)		191	225	44	INCL	(RK1,2)		OPP	01	 1R
		O (125)		251	200	39	INCL	(RK1,2)		OPP	01	
		R (137)		275	200	39	INCL	(RK1,2)		OPP	01	
		S (150)		301	190	37	INCL	(RK1,2)		OPP	01	
		T (165)		331	175	34	INCL	(RK1,2)		OPP	01	
	3200	Z (40)		77	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		A (50)		96	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		B (55)		110	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		C (73)		147	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		E (86)		175	225	44	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	 1R
		J (95)		191	225	44	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		O (125)		251	200	39	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		R (137)		275	200	39	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		S (150)		301	190	37	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		T (165)		331	175	34	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
	6000	Forward (73)		147	150	30	INCL	(RK2)		BOTH	01	 1R
		Reverse (83)		167	150	30	INCL	(RK2)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RZM.03

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		96	250	49	INCL			OPP	O1	 ↑ 1B
		B (55)		110	250	49	INCL			OPP	O1	
		C (73)		147	250	49	INCL			OPP	O1	
		E (86)		175	225	44	INCL			OPP	O1	
		J (95)		191	225	44	INCL			OPP	O1	
		O (125)		251	200	39	INCL			OPP	O1	
		R (137)		275	200	39	INCL			OPP	O1	
		S (150)		301	190	37	INCL			OPP	O1	
		T (165)		331	175	34	INCL			OPP	O1	
	3800	A (50)		96	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	 ↑ 1B
		B (55)		110	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	
		C (73)		147	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	
		E (86)		175	225	44	INCL	(CLUTCH SHIFT)		OPP	O1	
		J (95)		191	225	44	INCL	(CLUTCH SHIFT)		OPP	O1	
		O (125)		251	200	39	INCL	(CLUTCH SHIFT)		OPP	O1	
		R (137)		275	200	39	INCL	(CLUTCH SHIFT)		OPP	O1	
		S (150)		301	190	37	INCL	(CLUTCH SHIFT)		OPP	O1	
		T (165)		331	175	34	INCL	(CLUTCH SHIFT)		OPP	O1	
	4100	B (57)		110	450	87	INCL	(RK3)		OPP	O1	 ↑ 1B
		C (70)		134	470	90	INCL	(RK3)		OPP	O1	
		E (86)		165	470	90	INCL	(RK3)		OPP	O1	
		J (105)		202	400	77	INCL	(RK3)		OPP	O1	
	4250	Output 1 C (96)		133	420	80	INCL			OPP	O1	 ↑ 1B
		Output 2 B (89)		123	420	80	INCL			OPP	O1	
		Output 1 E (112)		155	400	76.5	INCL			OPP	O1	
		Output 2 C (104)		143	420	80	INCL			OPP	O1	
		Output 1 J (132)		182	380	73	INCL			OPP	O1	
		Output 2 E (121)		167	400	76.5	INCL			OPP	O1	
		Output 1 O (168)			350	67	INCL			OPP	O1	
		Output 2 J (152)			380	73	INCL			OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Rockwell-ZF-Meritor

RZM.03

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		147	150	30	INCL			BOTH	O1	 ↑ 1B
		Reverse (52)		167	150	30	INCL			BOTH	O1	
	8000	Forward (40)		83	500	95	INCL			BOTH	O1	 ↑ 1B
		Reverse (50)		99	500	95	INCL			BOTH	O1	
	8500	B (57)		76	500	95	INCL				O1	
		C (70)		101	500	95	INCL				O1	
		E (86)		120	480	90	INCL				O1	
		J (105)		149	450	86	INCL				O1	 ↑ 1B
		O (127)		173	400	76	INCL				O1	
		R (137)		189	360	68	INCL				O1	
		S (150)		207	320	62	INCL				O1	
		T (165)		228	280	54	INCL				O1	

FOOT NOTES:

RK1: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

RK2: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter reverses PTO output rotation.

RK3: Possible internal transmission gear interference with 4100 Series "J" & "O" ratios. Check before installing PTO.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Rockwell-ZF-Meritor

RZM.04

MO-11F10A-S11
MO-11G10A-D11
MO-11G10A-E11
MO-11G10A-M11
MO-11G10A-S11
MO-11G9R-M11
MO-12F10A-E12
MO-12F10A-S12
MO-12F9A-E12
MO-12F9A-S12
MO-12G10A-D12
MO-12G10A-E12
MO-12G10A-M12
MO-12G10A-S12
MO-12G9A-D12
MO-12G9A-E12
MO-12G9A-M12
MO-12G9A-S12
MO-12G9R-M12
MO-13F10A-E13
MO-13F10A-S13
MO-13F9A-E13
MO-13F9A-S13
MO-13G10A-D13
MO-13G10A-E13
MO-13G10A-M13
MO-13G10A-S13
MO-13G9A-D13
MO-13G9A-E13
MO-13G9A-M13
MO-13G9A-S13
MO-13G9R-M13
MO-14F10A-E14
MO-14F10A-M16
MO-14F10A-S14
MO-14F9A-E14
MO-14F9A-S14
MO-14G10A-D14
MO-14G10A-D16
MO-14G10A-E14
MO-14G10A-E16
MO-14G10A-M14
MO-14G10A-M16
MO-14G10A-S14
MO-14G10A-S16
MO-14G9A-D14
MO-14G9A-E14
MO-14G9A-M14
MO-14G9A-S14
MO-14G9R-M14
MO-15F10A-E15
MO-15F10A-S15
MO-15G10A-D15
MO-15G10A-E15
MO-15G10A-M15
MO-15G10A-S15
MO-16F10A-E16
MO-16F10A-S16
MO-16G10A-D16
MO-16G10A-E16
MO-16G10A-M16
MO-16G10A-S16
REO9-125A
REO9-135A
REO9-145A
REX10-115A
REX10-125A
REX10-135A
REX10-145A
REX10-155A
REX10-165A
REX9-125A
REX9-135A
REX9-145A
RMO10-115A
RMO10-125A
RMO10-135A
RMO10-145A
RMO10-145AT
RMO10-155A
RMO9-115A
RMO9-115R
RMO9-125A
RMO9-125R
RMO9-135A
RMO9-135R
RMO9-145A
RMO9-145R
RMX10-115A
RMX10-125A
RMX10-135A
RMX10-145A
RMX10-155A
RMX10-165A
RMX9-115R
RMX9-125A
RMX9-125R
RMX9-135A
RMX9-135R
RMX9-145A
RMX9-145R
RSX10-115A
RSX10-125A
RSX10-135A
RSX10-145A
RSX10-155A
RSX10-165A
RSX9-125A
RSX9-125R
RSX9-135A
RSX9-135R
RSX9-145A
RSX9-145R

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
	1000	B (55)		114	250	49	INCL	(RK1,2)		OPP	01	 1R
		C (73)		152	250	49	INCL	(RK1,2)		OPP	01	
		E (86)		181	225	44	INCL	(RK1,2)		OPP	01	
		J (95)		198	225	44	INCL	(RK1,2)		OPP	01	
		O (125)		260	200	39	INCL	(RK1,2)		OPP	01	
		R (137)		285	200	39	INCL	(RK1,2)		OPP	01	
		S (150)		312	190	37	INCL	(RK1,2)		OPP	01	
		T (165)		343	175	34	INCL	(RK1,2)		OPP	01	
	3200	Z (40)		80	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		A (50)		100	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		B (55)		114	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		C (73)		152	250	49	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		E (86)		181	225	44	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	 1R
		J (95)		198	225	44	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		O (125)		260	200	39	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		R (137)		285	200	39	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		S (150)		312	190	37	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
		T (165)		343	175	34	INCL	(RK1,2,CLUTCH SHIFT)		OPP	01	
	6000	Forward (73)		152	150	30	INCL	(RK2)		BOTH	01	 1R
		Reverse (83)		173	150	30	INCL	(RK2)		BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Rockwell-ZF-Meritor

RZM.04

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		100	250	49	INCL			OPP	O1	 ↑ 1B
		B (55)		114	250	49	INCL			OPP	O1	
		C (73)		152	250	49	INCL			OPP	O1	
		E (86)		181	225	44	INCL			OPP	O1	
		J (95)		198	225	44	INCL			OPP	O1	
		O (125)		260	200	39	INCL			OPP	O1	
		R (137)		285	200	39	INCL			OPP	O1	
		S (150)		312	190	37	INCL			OPP	O1	
		T (165)		343	175	34	INCL			OPP	O1	
	3800	A (50)		100	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	 ↑ 1B
		B (55)		114	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	
		C (73)		152	250	49	INCL	(CLUTCH SHIFT)		OPP	O1	
		E (86)		181	225	44	INCL	(CLUTCH SHIFT)		OPP	O1	
		J (95)		198	225	44	INCL	(CLUTCH SHIFT)		OPP	O1	
		O (125)		260	200	39	INCL	(CLUTCH SHIFT)		OPP	O1	
		R (137)		285	200	39	INCL	(CLUTCH SHIFT)		OPP	O1	
		S (150)		312	190	37	INCL	(CLUTCH SHIFT)		OPP	O1	
		T (165)		343	175	34	INCL	(CLUTCH SHIFT)		OPP	O1	
	4100	B (57)		113	450	87	INCL	(RK3)		OPP	O1	 ↑ 1B
		C (70)		139	470	90	INCL	(RK3)		OPP	O1	
		E (86)		171	470	90	INCL	(RK3)		OPP	O1	
		J (105)		209	400	77	INCL	(RK3)		OPP	O1	
	4250	Output 1 C (96)		138	420	80	INCL			OPP	O1	 ↑ 1B
		Output 2 B (89)		128	420	80	INCL			OPP	O1	
		Output 1 E (112)		161	400	76.5	INCL			OPP	O1	
		Output 2 C (104)		149	420	80	INCL			OPP	O1	
		Output 1 J (132)		189	380	73	INCL			OPP	O1	
		Output 2 E (121)		173	400	76.5	INCL			OPP	O1	
		Output 1 O (168)			350	67	INCL			OPP	O1	
		Output 2 J (152)			380	73	INCL			OPP	O1	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

RZM.04

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)		152	150	30	INCL			OPP	O1	 ↑ 1B
		Reverse (52)		173	150	30	INCL			OPP	O1	
	8000	Forward (40)		86	500	95	INCL			OPP	O1	 ↑ 1B
		Reverse (50)		102	500	95	INCL			OPP	O1	
	8500	B (57)		79	500	95	INCL			OPP	O1	
		C (70)		104	500	95	INCL			OPP	O1	
		E (86)		124	480	90	INCL			OPP	O1	
		J (105)		154	450	86	INCL			OPP	O1	 ↑ 1B
		O (127)		179	400	76	INCL			OPP	O1	
		R (137)		196	360	68	INCL			OPP	O1	
		S (150)		215	320	62	INCL			OPP	O1	
		T (165)		236	280	54	INCL			OPP	O1	

FOOT NOTES:

RK1: Direct mount pumps will not clear bulge on transmission case. Must use geared adapter. Use of adapter changes PTO output rotation.

RK2: For vehicles with Spring Hanger interference, use adapter AD645-01. Not applicable for direct mount pumps. Use of adapter reverses PTO output rotation.

RK3: Possible internal transmission gear interference with 4100 Series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Rockwell-ZF-Meritor

MO-13Z16A-A13 MO-14Z16A-A14 MO-15Z16A-A15 MO-16Z16A-A16

RZM.05

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%		111	609	118	8028933		1018104	OPP		
1021903		126%		139	516	100	8039033		1018104	ENG		
1010003		132%		146	310	60	8011933		1018104	ENG		
1017803		172%		190	332	64	8012733		1018104	ENG		
1026003		153%		169	310	60	8038933		1018104	ENG		

GENERAL NOTES:

If the truck has a Meritor yoke model #SPL250/RPL250 or SPL170 front driveshaft, these PTO's won't fit. Yoke model #RPL200 is compatible. The transmission must be programmed for PTO activation. Consult your dealer for further information.

M-13Z12A-A13 MO-13Z12A-A13 MO-15Z12A-A15
M-14Z12A-A14 MO-14Z12A-A14 MO-16Z12A-A16

RZM.06

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%		135	609	118	8028933		1018104	OPP		
1021903		126%		170	516	100	8039033		1018104	ENG		
1010003		132%		178	310	60	8011933		1018104	ENG		
1017803		172%		232	332	64	8012733		1018104	ENG		
1026003		153%		207	310	60	8038933		1018104	ENG		

GENERAL NOTES:

If the truck has a Meritor yoke model #SPL250/RPL250 or SPL170 front driveshaft, these PTO's won't fit. Yoke model #RPL200 is compatible. The transmission must be programmed for PTO activation. Consult your dealer for further information.

For complete part numbers, consult the PTO Series section (page 25)

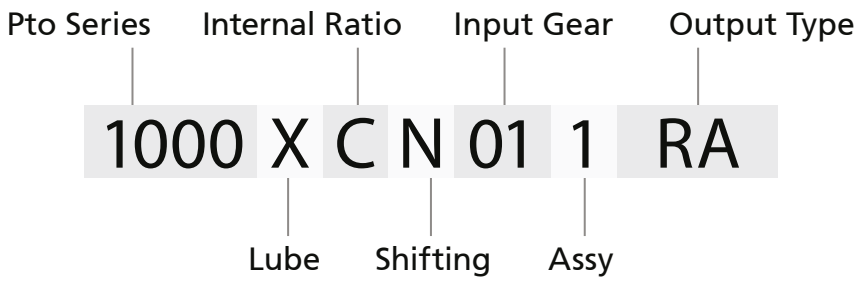
Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Spicer Index

Transmission Model	Pag.
1007-2A(301117)(301206)	327
1007-2B(301118)(301207)	313
1007-3A(301121)(301208)	356
1010-2A(301111)	368
1010-3A(301113)	371
1010-3B(301115)	390
1010-4A(301112)	368
1010-5A(301114)	371
1020-2A(301123)	368
1020-3A(301125)	390
1020-4A(301124)	368
1020-5A(301126)	390
1052A(301091)	328
1054A(301092)	328
1062A(301101)	327
1062B(301103)	329
1062C(301133)	313
1062D(301148)	329
1064A(301102)	327
1064B(301104)	329
1064C(301136)	313
1064D(301149)	329
1107-2A(301201)	305
1207-2A(301195)	327
1207-2B(301196)	313
1207-2D(301240)	313
1207-3A(301199)	356
1211-3A	358
1211-5A	358
1214-3A(301130)(301212)	360
1214-5A(301131)(301213)	360
1241C(300977.301145.301151)	395
1241-CT	395
1241D(300978.301146.301152)	395
1241-DT	395
1252A(301094)	346
1253A(301096)	382
1253B(301098)	384
1254A(301095)	346
1255A(301097)	382
1255B(301099)	384

Transmission Model	Pag.
1262A(301105)	351
1263A(301107)	362
1263B(301109)	356
1264A(301106)	351
1265A(301108)	362
1272A(301140)(301215)	313
1272B(301158)	329
1274A(301141)(301216)	313
1274B(301159)	329
1310-2A(301292)	308
1310-4A(301317)	308
1352A(301235)	328
1362A(301169)	327
1362B(301171)	313
1362C(301178)	313
1362D(301180)	313
1364C(301179)	313
1372A(301271)(301398)	305
1372B(301325)(301405)	304
1374A(301272)	305
1410-2A(301288)(301161)	368
1410-3A(301163)	371
1410-3B(301165)	390
1412-3A(301227)	371
1414-3A(301243)(301290)	371
1420-3A(301232)(301239)	371
1420-3B(301332)	371
1452A(301183)	346
1453A(301185)	382
1453B(301187)	384
1462A(301173)	327
1463A(301175)	362
1463C(301357)	362
5652(8-BOLT&6-BOLTOPENING)	315
5652A(8-BOLT&6-BOLTOPENING)	317
5652B(8-BOLT&6-BOLTOPENING)	315
5752(8-BOLT&6-BOLTOPENING)	317
5752C(8-BOLT&6-BOLTOPENING)	352
5753A	354
5756B(8-BOLT&6-BOLTOPENING)	342
5852	315

EXAMPLE:



Spicer Index

Transmission Model	Pag.
6852	386
6852G	348
6853B	386
9072A(301321)	306
AMO1000-4C(301474)	395
AMO1000-4D(301475)	395
APO1000-4C(301476)	395
APO1000-4D(301477)	395
AS56-7B AMT-7	398
AS100-10D(301612)	374
AS125-9A	369
AS125-10D(301613)	374
AS135-9A	369
AS135-10D(301614)	374
AS140-9A	369
AS145-10D(301615)	374
ASO10-VPD	393
ASO56-7A(301452)(301636)	373
ASO56-7B	373
ASO66-7A(301452)(301636)	373
ASO66-7B	373
ASO100-10S	393
ASO125-9A	396
ASO125-10D	396
ASO125-10S(301541)(301579)	393
ASO135-9A	396
ASO135-10D	396
ASO140-9A	391
ASO140-10S(301542)(301580)	393
ASO145-9A	391
ASO150-9A	391
ASO150-10S(301526)(301578)	393
ASO165-10S(301543)(301581)	393
ATO1000-4C	395
ATO1000-4D	395
CM-4054A(301329)(301420)	319
CM-4054D(301343)(301421)	320
CM-4954A(301386)	311
CM-4954D(301387)	312
CM-5052A(301068)(301472)	321
CM-5052B(301248)(301079)	323
CM-5052C(301249)(301080)	321
CM-5052D(301250)(301230)	325
CM-5252A(301251)(301081)	344
CM-5510(301315)(301371)	321
CM-5552A(301309)(301366)	321
CM-5552B(301310)(301367)	323
CM-5552C(301311)(301368)	321
CM-5552D(301312)(301369)	325
CM-5852A(301313)(301370)	344
CM-5952A(301360)	321
CM-5952B(301361)	323
CM-5952C(301362)	321
CM-5952D(301363)	325
CM-5952E(301364)	344
CM-6052A(301253)(301075)(301413)	336
CM-6052B(301254)(301082)(301414)	338
CM-6052C(301255)(301083)(301415)	349
CM-6052D(301256)(301416)	340
CM-6252A(301257)(301084).	376
CM-6252B(301258)(301085)(301417)	387
CM-6253A(301259)(301086)	378
CM-6253B(301260)(301087)(301418)	388
CV67F	340
ES42-5A(301438)	319
ES42-5D(301439)	320
ES43-5A(301510)(301633)	311

Transmission Model	Pag.
ES43-5D(301511)(301634)	312
ES46-5A	314
ES52-5A(301455)	311
ES52-5D(301456)	312
ES52-7A(301451)(301635)	313
ES52-7B(301642)(301637)	313
ES53-5A(301508)(301631)	311
ES53-5D(301509)(301632)	312
ES54-5A	310
ES54-5C	347
ES55-5D	325
ES56-7B(301739)	398
ES60-5A(301460)	321
ES60-5C(301461)	321
ES60-5D(301462)	325
ES60-5E(301463)	344
ES60-5F(301482)	321
ES62-5A(301528)	321
ES62-5D(301530)	325
ES65-5A(301466)	336
ES65-5B(301467)	338
ES65-5D(301469)	340
ES65-5E(301468)	349
ES67-5A(301532)	321
ES67-5D(301534)	325
ES68-5D	325
ES70-5A(301536)	336
ES70-5D(301539)	340
ES72-5A	336
ES72-5B(301637)	388
ES72-5C	340
ES72-5D	340
ESO65-7A(301452)(301636)	373
ESO66-7B(301643)(301638)(301742)	373
LAS100-10D(301616)	374
LAS115-9A(301590)	369
LAS125-9A(301591)	369
LAS125-10D(301617)	374
LAS135-9A(301592)	369
LAS135-10D(301618)	374
LAS140-9A	369
LAS145-9A(301593)	369
LAS145-10D(301619)	374
LASO10-VPD	393
LASO115-9A(301594)	391
LASO125-9A(301595)	391
LASO125-10S(301620)	393
LASO135-9A(301597)	391
LASO140-9A	391
LASO140-10S(301621)	393
LASO145-9A(301596)	391
LASO150-9A	391
LASO150-10S(301622)	393
LLAS100-10D	374
LLAS125-10D	374
LLAS135-10D	374
LLAS145-10D	374
LLASO125-10S	393
LLASO140-10S	393
LLASO150-10S	393
LLPS100-10D	374
LLPS125-10D	374
LLPS135-10D	374
LLPS145-10D(301703)	374
LLPSO100-10S	393
LLPSO125-10S	393
LLPSO140-10S(301705)	393

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com




bezaresusa

Transmission Model	Pag.
LLPSO150-10S	393
LLPSO165-10S	393
LPS9-VPD	391
LPS100-10D(301608)	374
LPS125-9A(301547)(301567)	369
LPS125-10D(301609)	374
LPS135-10D(301610)	374
LPS140-9A(301549)(301569)	369
LPS145-10D(301611)	374
LPSO9-VPD	391
LPSO10-VPD	393
LPSO100-10S	393
LPSO125-9A(301548)(301568)	391
LPSO125-10S(301544)(301572)	393
LPSO140-9A(301550)(301570)	391
LPSO140-10S(301545)(301573)	393
LPSO150-9A(301551)(301571)	391
LPSO150-10S(301546)(301574)	393
LPSO165-10S	393
P1241C(301053)(301395)	395
P1241D(301054)(301396)	395
PS9-VPD	391
PS85-10LL	308
PS85-14-4L(301525)	308
PS86-10V(301587)	366
PS95-9A(301500)(301553)	369
PS97-7A(301446)	306
PS100-10D(301604)	374
PS105-7LL(301464)	328
PS110-7A(301519)	305
PS110-7B(301518)	304
PS125-7B(301445)	304
PS125-9A(301431)(301554)	369
PS125-10D(301605)	374
PS130-5A(301470)	328
PS130-6B(301471)	313
PS130-6L(301465)	328
PS130-10A(301485)	308
PS130-12A(301484)	308
PS135-10D(301606)	374
PS140-7A(301444)	305
PS140-9A(301495)(301555)	369
PS145-7A(301520)	305
PS145-10D(301607)	374
PSO9-VPD	391
PSO10-VPD	393
PSO85-10LL	371
PSO85-14-4L	371
PSO100-10S(301505)(301560)	393
PSO115-10V(301588)	393
PSO120-8LL(301644)	356
PSO125-9A(301499)(301556)	391
PSO125-10D	396
PSO125-10S(301504)(301561)	393
PSO125-10V(301589)	393
PSO135-10D	396
PSO140-6A(301472)	362
PSO140-6C(301486)	362
PSO140-9A(301432)(301557)	391
PSO140-10S(301506)(301562)	393
PSO140-12B(301473)	371
PSO140-14A(301483)	371
PSO145-10D	396
PSO145-10V(301582)	393
PSO150-9A(301496)(301558)	391
PSO150-9S(301521)	393
PSO150-10S(301503)(301563)	393

Transmission Model	Pag.
PSO150-16A(301641)	362
PSO150-16B(301647)	334
PSO155-10D	396
PSO160-10S(301517)	393
PSO165-10D	396
PSO165-10S(301523)(301564)	393
PSO165-12B	371
PSO165-16B(301583)	334
PSO165-18A(301666)	329
PSO165-18B	329
PSO175-16B(301584)	334
PSO175-16M(301645)	334
PSO175-18A(301585)	329
PSO175-18B	329
PSO175-18M(301849)	329
T-9505-2A(301408)	328
T-9505-2B(301425)	328
TSP120-12A	380
TSPO145-14A	364
TSPO145-16B	334
TSPO155-14HP	364
TSPO155-16A	362
TSPO155-16B	334
TSPO155-16HP	334
TSPO165-16HP	334
TSPO165-18A	332
TSPO165-18HP	332

Spicer

1372B(301325)(301405) **PS110-7B(301518)** **PS125-7B(301445)** **SPIC.01**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		49	250	49	S3		6300S	OPP	01	
		C (73)		65	250	49	S3		6300S	OPP	01	
		E (86)		77	225	44	S3		6300S	OPP	01	
		J (95)		84	225	44	S3		6300S	OPP	01	
		O (125)		111	200	39	S3		6300S	OPP	01	
		R (137)		121	200	39	S3		6300S	OPP	01	
		S (150)		133	190	37	S3		6300S	OPP	01	
		T (165)		146	175	34	S3		6300S	OPP	01	
	3200	Z (40)		35	250	49	S3		6300S	OPP	01	
		A (50)		44	250	49	S3		6300S	OPP	01	
		B (55)		49	250	49	S3		6300S	OPP	01	
		C (73)		65	250	49	S3		6300S	OPP	01	
		E (86)		78	225	44	S3		6300S	OPP	01	
		J (95)		85	225	44	S3		6300S	OPP	01	
		O (125)		111	200	39	S3		6300S	OPP	01	
		R (137)		121	200	39	S3		6300S	OPP	01	
		S (150)		133	190	37	S3		6300S	OPP	01	
		T (165)		146	175	34	S3		6300S	OPP	01	
	6000	Forward (73)		65	150	30	S3		6300S	BOTH	01	
		Reverse (83)		74	150	30	S3		6300S	BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com




bezaresusa

1107-2A(301201)
1372A(301271)(301398)

1374A(301272)
PS110-7A(301519)

PS140-7A(301444)
PS145-7A(301520)

SPIC.02




6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		52	250	49	INCL			OPP	02	
		C (73)		69	250	49	INCL			OPP	02	
		E (86)		83	225	44	INCL			OPP	02	
		J (95)		90	225	44	INCL			OPP	02	
		O (125)		119	200	39	INCL			OPP	02	
		R (137)		130	200	39	INCL			OPP	02	
		S (150)		143	190	37	INCL			OPP	02	
		T (165)		157	175	34	INCL			OPP	02	
3200		Z (40)		38	250	49	INCL			OPP	02	
		A (50)		48	250	49	INCL			OPP	02	
		B (55)		52	250	49	INCL			OPP	02	
		C (73)		69	250	49	INCL			OPP	02	
		E (86)		83	225	44	INCL			OPP	02	
		J (95)		91	225	44	INCL			OPP	02	
		O (125)		119	200	39	INCL			OPP	02	
		R (137)		130	200	39	INCL			OPP	02	
		S (150)		143	190	37	INCL			OPP	02	
		T (165)		157	175	34	INCL			OPP	02	
6000		Forward (73)		69	150	30	INCL			BOTH	02	
		Reverse (83)		79	150	30	INCL			BOTH	02	

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

9072A(301321) **PS97-7A(301446)** **SPIC.03**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		53	250	49	INCL		6140S	OPP	01	
		C (73)		70	250	49	INCL		6140S	OPP	01	
		E (86)		84	225	44	INCL		6140S	OPP	01	
		J (95)		92	225	44	INCL		6140S	OPP	01	
		O (125)		120	200	39	INCL		6140S	OPP	01	
		R (137)		132	200	39	INCL		6140S	OPP	01	
		S (150)		145	190	37	INCL		6140S	OPP	01	
		T (165)		159	175	34	INCL		6140S	OPP	01	
	3200	Z (40)		39	250	49	INCL		6140S	OPP	01	
		A (50)		48	250	49	INCL		6140S	OPP	01	
		B (55)		53	250	49	INCL		6140S	OPP	01	
		C (73)		70	250	49	INCL		6140S	OPP	01	
		E (86)		84	225	44	INCL		6140S	OPP	01	
		J (95)		92	225	44	INCL		6140S	OPP	01	
		O (125)		120	200	39	INCL		6140S	OPP	01	
		R (137)		132	200	39	INCL		6140S	OPP	01	
		S (150)		145	190	37	INCL		6140S	OPP	01	
		T (165)		159	175	34	INCL		6140S	OPP	01	
	6000	Forward (73)		70	150	30	INCL		6140S	BOTH	01	
		Reverse (83)		80	150	30	INCL		6140S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		48	250		INCL			OPP	01	
		B (55)		53	250	49	INCL			OPP	01	
		C (73)		70	250	49	INCL			OPP	01	
		E (86)		84	225	44	INCL			OPP	01	
		J (95)		92	225	44	INCL			OPP	01	
		O (125)		120	200	39	INCL			OPP	01	
		R (137)		132	200	39	INCL			OPP	01	
		S (150)		145	190	37	INCL			OPP	01	
		T (165)		159	175	34	INCL			OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

9072A(301321) **PS97-7A(301446)** **SPIC.03**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
						← CONTINUES						
	3800	Z (40)	39	250	49	INCL	CLU			OPP	01	
		A (50)	48	250	49	INCL	CLUTCH SHIFT			OPP	01	
		B (55)	53	250	49	INCL	CLUTCH SHIFT			OPP	01	
		C (73)	70	250	49	INCL	CLUTCH SHIFT			OPP	01	
		E (86)	84	225	44	INCL	CLUTCH SHIFT			OPP	01	
		J (95)	92	225	44	INCL	CLUTCH SHIFT			OPP	01	
		O (125)	120	200	39	INCL	CLUTCH SHIFT			OPP	01	
		R (137)	132	200	39	INCL	CLUTCH SHIFT			OPP	01	
		S (150)	145	190	37	INCL	CLUTCH SHIFT			OPP	01	
		T (165)	159	175	34	INCL	CLUTCH SHIFT			OPP	01	
	4100	B (57)	55	450	87	INCL	(SP2)			OPP	01	
		C (70)	67	470	90	INCL	(SP2)			OPP	01	
		E (86)	83	470	90	INCL	(SP2)			OPP	01	
		J (105)	101	400	77	INCL	(SP2)			OPP	01	
	4250	Output 1 C (96)	93	420	80	INCL	(SP2)			OPP	01	
		Output 2 B (89)	86	420	80	INCL	(SP2)			OPP	01	
		Output 1 E (112)	108	400	76.5	INCL	(SP2)			OPP	01	
		Output 2 C (104)	100	420	80	INCL	(SP2)			OPP	01	
		Output 1 J (132)	127	380	73	INCL	(SP2)			OPP	01	
		Output 2 E (121)	116	400	76.5	INCL	(SP2)			OPP	01	
		Output 1 O (168)	162	350	67	INCL	(SP2)			OPP	01	
		Output 2 J (152)	147	380	73	INCL	(SP2)			OPP	01	
	6800	Forward (55)	70	150	30	INCL				BOTH	01	
		Reverse (52)	80	150	30	INCL				BOTH	01	
	8000	Forward (40)	40	500	95	INCL				BOTH	01	
		Reverse (50)	47	500	95	INCL				BOTH	01	
	8500	B (57)	36	500	95	INCL				OPP	01	
		C (70)	48	500	95	INCL				OPP	01	
		E (86)	58	480	90	INCL				OPP	01	
		J (105)	72	450	86	INCL				OPP	01	
		O (127)	83	400	76	INCL				OPP	01	
		R (137)	91	360	68	INCL				OPP	01	
		S (150)	99	320	62	INCL				OPP	01	
		T (165)	109	280	54	INCL				OPP	01	


↑ 1B


↑ 1B


↑ 1B


↑ 1B


↑ 1B

FOOT NOTES:




SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1310-2A(301292) **PS130-10A(301485)** **PS85-10LL**
1310-4A(301317) **PS130-12A(301484)** **PS85-14-4L(301525)**

SPIC.04

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		54	250	49	S3		6187S	OPP	01	
		C (73)		72	250	49	S3		6187S	OPP	01	
		E (86)		86	225	44	S3		6187S	OPP	01	
		J (95)		94	225	44	S3		6187S	OPP	01	
	1000	O (125)		123	200	39	S3		6187S	OPP	01	
		R (137)		135	200	39	S3		6187S	OPP	01	
		S (150)		148	190	37	S3		6187S	OPP	01	
		T (165)		163	175	34	S3		6187S	OPP	01	
		Z (40)		39	250	49	S3		6187S	OPP	01	
		A (50)		49	250	49	S3		6187S	OPP	01	
		B (55)		54	250	49	S3		6187S	OPP	01	
		C (73)		72	250	49	S3		6187S	OPP	01	
		E (86)		86	225	44	S3		6187S	OPP	01	
	3200	J (95)		94	225	44	S3		6187S	OPP	01	
		O (125)		123	200	39	S3		6187S	OPP	01	
		R (137)		135	200	39	S3		6187S	OPP	01	
		S (150)		148	190	37	S3		6187S	OPP	01	
		T (165)		162	175	34	S3		6187S	OPP	01	
	6000	Forward (73)		72	150	30	S3		6187S	BOTH	01	
		Reverse (83)		82	150	30	S3		6187S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		49	250		INCL		GA8062	OPP	01	
		B (55)		54	250	49	INCL		GA8062	OPP	01	
		C (73)		72	250	49	INCL		GA8062	OPP	01	
		E (86)		86	225	44	INCL		GA8062	OPP	01	
	2000	J (95)		94	225	44	INCL		GA8062	OPP	01	
		O (125)		123	200	39	INCL		GA8062	OPP	01	
		R (137)		135	200	39	INCL		GA8062	OPP	01	
		S (150)		148	190	37	INCL		GA8062	OPP	01	
		T (165)		163	175	34	INCL		GA8062	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

1310-2A(301292) **PS130-10A(301485)** **PS85-10LL**
1310-4A(301317) **PS130-12A(301484)** **PS85-14-4L(301525)**

SPIC.04

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	39	250	49	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		A (50)	49	250	49	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		B (55)	54	250	49	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		C (73)	72	250	49	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		E (86)	86	225	44	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		J (95)	94	225	44	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		O (125)	123	200	39	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		R (137)	135	200	39	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		S (150)	148	190	37	INCL	CLUTCH SHIFT		GA8062	OPP	01	
		T (165)	162	175	34	INCL	CLUTCH SHIFT		GA8062	OPP	01	
	4100	B (57)	56	450	87	INCL		(SP2)	GA8062	OPP	01	
		C (70)	69	470	90	INCL		(SP2)	GA8062	OPP	01	
		E (86)	85	470	90	INCL		(SP2)	GA8062	OPP	01	
		J (105)	103	400	77	INCL		(SP2)	GA8062	OPP	01	
	4250	Output 1 C (96)	95	420	80	INCL		(SP2)		OPP	01	
		Output 2 B (89)	88	420	80	INCL		(SP2)		OPP	01	
		Output 1 E (112)	111	400	76.5	INCL		(SP2)		OPP	01	
		Output 2 C (104)	102	420	80	INCL		(SP2)		OPP	01	
		Output 1 J (132)	130	380	73	INCL		(SP2)		OPP	01	
		Output 2 E (121)	119	400	76.5	INCL		(SP2)		OPP	01	
		Output 1 O (168)	166	350	67	INCL		(SP2)		OPP	01	
		Output 2 J (152)	150	380	73	INCL		(SP2)		OPP	01	
	6800	Forward (55)	72	150	30	INCL			GA8062	BOTH	01	
		Reverse (52)	82	150	30	INCL			GA8062	BOTH	01	
	8000	Forward (40)	41	500	95	INCL			GA8062	BOTH	01	
		Reverse (50)	48	500	95	INCL			GA8062	BOTH	01	
	8500	B (57)	37	500	95	INCL			GA8062	OPP	01	
		C (70)	49	500	95	INCL			GA8062	OPP	01	
		E (86)	59	480	90	INCL			GA8062	OPP	01	
		J (105)	73	450	86	INCL			GA8062	OPP	01	
		O (127)	85	400	76	INCL			GA8062	OPP	01	
		R (137)	93	360	68	INCL			GA8062	OPP	01	
		S (150)	102	320	62	INCL			GA8062	OPP	01	
		T (165)	112	280	54	INCL			GA8062	OPP	01	


↑ 1B


↑ 1B


↑ 1B


↑ 1B


↑ 1B


↑ 1B

FOOT NOTES:


SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

ES54-5A

SPIC.05

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		38	250	49	S3		GA6093	OPP	30	
		C (73)		50	250	49	S3		GA6093	OPP	30	
		E (86)		60	225	44	S3		GA6093	OPP	30	
		J (95)		66	225	44	S3		GA6093	OPP	30	
		O (125)		86	200	39	S3		GA6093	OPP	30	
		R (137)		95	200	39	S3		GA6093	OPP	30	
		S (150)		104	190	37	S3		GA6093	OPP	30	
		T (165)		114	175	34	S3		GA6093	OPP	30	
3200		Z (40)		28	250	49	S3		GA6093	OPP	30	
		A (50)		35	250	49	S3		GA6093	OPP	30	
		B (55)		38	250	49	S3		GA6093	OPP	30	
		C (73)		50	250	49	S3		GA6093	OPP	30	
		E (86)		60	225	44	S3		GA6093	OPP	30	
		J (95)		66	225	44	S3		GA6093	OPP	30	
		O (125)		86	200	39	S3		GA6093	OPP	30	
		R (137)		94	200	39	S3		GA6093	OPP	30	
		S (150)		104	190	37	S3		GA6093	OPP	30	
		T (165)		114	175	34	S3		GA6093	OPP	30	
6000		Forward (73)		50	150	30	S3		GA6093	BOTH	30	
		Reverse (83)		57	150	30	S3		GA6093	BOTH	30	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-4954A(301386) **ES43-5A(301510)(301633)** **ES52-5A(301455)** **ES53-5A(301508)(301631)** **SPIC.06**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		40	250	49	INCL	(SP6,11)		OPP	33	
		C (73)		53	250	49	INCL	(SP6,11)		OPP	33	
		E (86)		64	225	44	INCL	(SP6,11)		OPP	33	
		J (95)		69	225	44	INCL	(SP6,11)		OPP	33	3L 1R
		O (125)		91	200	39	INCL	(SP6,11)		OPP	33	
		R (137)		100	200	39	INCL	(SP6,11)		OPP	33	
		S (150)		110	190	37	INCL	(SP6,11)		OPP	33	
		T (165)		121	175	34	INCL	(SP6,11)		OPP	33	
3200		Z (40)		29	250	49	INCL	(SP6,11)		OPP	33	
		A (50)		37	250	49	INCL	(SP6,11)		OPP	33	
		B (55)		40	250	49	INCL	(SP6,11)		OPP	33	
		C (73)		53	250	49	INCL	(SP6,11)		OPP	33	
		E (86)		64	225	44	INCL	(SP6,11)		OPP	33	3L 1R
		J (95)		70	225	44	INCL	(SP6,11)		OPP	33	
		O (125)		91	200	39	INCL	(SP6,11)		OPP	33	
		R (137)		100	200	39	INCL	(SP6,11)		OPP	33	
		S (150)		110	190	37	INCL	(SP6,11)		OPP	33	
		T (165)		120	175	34	INCL	(SP6,11)		OPP	33	
6000		Forward (73)		53	150	30	INCL	(SP11)		BOTH	33	3L 1R
		Reverse (83)		61	150	30	INCL	(SP11)		BOTH	33	

FOOT NOTES:

SP6: Direct mount pumps may encounter interference with transmission case in left mounting.



SP11: There are two openings on the left side of the transmission. Only the front opening is set up for PTO usage.

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

CM-4954D(301387) **ES43-5D(301511)(301634)** **ES52-5D(301456)** **ES53-5D(301509)(301632)** **SPIC.07**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		43	250	49	S3	(SP6,11,12)	GA6125	OPP	33	
		C (73)		57	250	49	S3	(SP6,11,12)	GA6125	OPP	33	
		E (86)		68	225	44	S3	(SP6,11,12)	GA6125	OPP	33	
		J (95)		74	225	44	S3	(SP6,11,12)	GA6125	OPP	33	
		O (125)		97	200	39	S3	(SP6,11,12)	GA6125	OPP	33	
		R (137)		106	200	39	S3	(SP6,11,12)	GA6125	OPP	33	
		S (150)		117	190	37	S3	(SP6,11,12)	GA6125	OPP	33	
		T (165)		128	175	34	S3	(SP6,11,12)	GA6125	OPP	33	
3200		Z (40)		31	250	49	S3	(SP6,11,12)	GA6125	OPP	33	
		A (50)		39	250	49	S3	(SP6,11,12)	GA6125	OPP	33	
		B (55)		43	250	49	S3	(SP6,11,12)	GA6125	OPP	33	
		C (73)		57	250	49	S3	(SP6,11,12)	GA6125	OPP	33	
		E (86)		68	225	44	S3	(SP6,11,12)	GA6125	OPP	33	
		J (95)		74	225	44	S3	(SP6,11,12)	GA6125	OPP	33	
		O (125)		97	200	39	S3	(SP6,11,12)	GA6125	OPP	33	
		R (137)		106	200	39	S3	(SP6,11,12)	GA6125	OPP	33	
		S (150)		117	190	37	S3	(SP6,11,12)	GA6125	OPP	33	
		T (165)		128	175	34	S3	(SP6,11,12)	GA6125	OPP	33	
6000		Forward (73)		57	150	30	S3	(SP6,11,12)	GA6125	BOTH	33	
		Reverse (83)		65	150	30	S3	(SP6,11,12)	GA6125	BOTH	33	

FOOT NOTES:

SP6: Direct mount pumps may encounter interference with transmission case in left mounting.

SP11: There are two openings on the left side of the transmission. Only the front opening is set up for PTO usage.

SP12: PTO interferes with exhaust and front driveshaft on IHC Series 1854-4x4.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

1007-2B(301118)(301207) **1207-2B(301196)** **1274A(301141)(301216)** **1362D(301180)**
1062C(301133) **1207-2D(301240)** **1362B(301171)** **1364C(301179)**
1064C(301136) **1272A(301140)(301215)** **1362C(301178)** **PS130-6B(301471)**

SPIC.08

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		58	250	49	INCL		6140S	OPP	01	
		C (73)		77	250	49	INCL		6140S	OPP	01	
		E (86)		91	225	44	INCL		6140S	OPP	01	
		J (95)		100	225	44	INCL		6140S	OPP	01	
	1010	O (125)		131	200	39	INCL		6140S	OPP	01	
		R (137)		144	200	39	INCL		6140S	OPP	01	
		S (150)		157	190	37	INCL		6140S	OPP	01	
		T (165)		173	175	34	INCL		6140S	OPP	01	



ES52-7A(301451)(301635) **ES52-7B(301642)(301637)**

SPIC.11

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		37	250	49	INCL	(SP3,4,13)		OPP	34	
		C (73)		48	250	49	INCL	(SP3,4,13)		OPP	34	
		E (86)		58	225	44	INCL	(SP3,4,13)		OPP	34	
		J (95)		63	225	44	INCL	(SP3,4,13)		OPP	34	
	1010	O (125)		83	200	39	INCL	(SP3,4,13)		OPP	34	
		R (137)		91	200	39	INCL	(SP3,4,13)		OPP	34	
		S (150)		100	190	37	INCL	(SP3,4,13)		OPP	34	
		T (165)		110	175	34	INCL	(SP3,4,13)		OPP	34	



FOOT NOTES:

SP3: Check for possible interference with exhaust.

SP4: Possible clearance issue with direct mount pump. May need to use "3" assembly arrangement.

SP13: Left Side: Direct mount pump interferes with flange on transmission at rear of PTO opening. Shaft-high assembly arrangement interferes with bulge in transmission case.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Spicer

ES46-5A

SPIC.12

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		41	250	49	INCL	GEAR NOT CUT		OPP	35	
		C (73)		54	250	49	INCL	GEAR NOT CUT		OPP	35	
		E (86)		65	225	44	INCL	GEAR NOT CUT		OPP	35	
		J (95)		71	225	44	INCL	GEAR NOT CUT		OPP	35	
		O (125)		93	200	39	INCL	GEAR NOT CUT		OPP	35	
		R (137)		102	200	39	INCL	GEAR NOT CUT		OPP	35	
		S (150)		112	190	37	INCL	GEAR NOT CUT		OPP	35	
		T (165)		123	175	34	INCL	GEAR NOT CUT		OPP	35	
3200		Z (40)		30	250	49	INCL	GEAR NOT CUT		OPP	35	
		A (50)		37	250	49	INCL	GEAR NOT CUT		OPP	35	
		B (55)		41	250	49	INCL	GEAR NOT CUT		OPP	35	
		C (73)		54	250	49	INCL	GEAR NOT CUT		OPP	35	
		E (86)		65	225	44	INCL	GEAR NOT CUT		OPP	35	
		J (95)		71	225	44	INCL	GEAR NOT CUT		OPP	35	
		O (125)		93	200	39	INCL	GEAR NOT CUT		OPP	35	
		R (137)		102	200	39	INCL	GEAR NOT CUT		OPP	35	
		S (150)		112	190	37	INCL	GEAR NOT CUT		OPP	35	
		T (165)		123	175	34	INCL	GEAR NOT CUT		OPP	35	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

5652(8-BOLT&6-BOLTOPENING) **5652B(8-BOLT&6-BOLTOPENING)** **5852**

SPIC.14

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		24	250	49	INCL			OPP	03	
		C (73)		32	250	49	INCL			OPP	03	
		E (86)		39	225	44	INCL			OPP	03	
		J (95)		42	225	44	INCL			OPP	03	3L
	1000	O (125)		56	200	39	INCL			OPP	03	
		R (137)		61	200	39	INCL			OPP	03	
		S (150)		67	190	37	INCL			OPP	03	
		T (165)		73	175	34	INCL			OPP	03	
		Z (40)		18	250	49	INCL			OPP	03	
		A (50)		22	250	49	INCL			OPP	03	
		B (55)		24	250	49	INCL			OPP	03	
		C (73)		32	250	49	INCL			OPP	03	
		E (86)		39	225	44	INCL			OPP	03	3L
	3200	J (95)		43	225	44	INCL			OPP	03	
		O (125)		56	200	39	INCL			OPP	03	
		R (137)		61	200	39	INCL			OPP	03	
		S (150)		67	190	37	INCL			OPP	03	
		T (165)		73	175	34	INCL			OPP	03	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)			250		S4		8295S	OPP	08	
		B (55)		46	250	49	S4		8295S	OPP	08	
		C (73)		61	250	49	S4		8295S	OPP	08	
		E (86)		73	225	44	S4		8295S	OPP	08	
		J (95)		80	225	44	S4		8295S	OPP	08	1R
	2000	O (125)		105	200	39	S4		8295S	OPP	08	
		R (137)		115	200	39	S4		8295S	OPP	08	
		S (150)		126	190	37	S4		8295S	OPP	08	
		T (165)		138	175	34	S4		8295S	OPP	08	

CONTINUES →

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

5652(8-BOLT&6-BOLTOPENING) **5652B(8-BOLT&6-BOLTOPENING)** **5852**

SPIC.14


8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	37	250	49	S4	CLUTCH SHIFT		8295S	OPP	08	
		A (50)	46	250	49	S4	CLUTCH SHIFT		8295S	OPP	08	
		B (55)	50	250	49	S4	CLUTCH SHIFT		8295S	OPP	08	
		C (73)	67	250	49	S4	CLUTCH SHIFT		8295S	OPP	08	
		E (86)	80	225	44	S4	CLUTCH SHIFT		8295S	OPP	08	
		J (95)	87	225	44	S4	CLUTCH SHIFT		8295S	OPP	08	
		O (125)	114	200	39	S4	CLUTCH SHIFT		8295S	OPP	08	
		R (137)	125	200	39	S4	CLUTCH SHIFT		8295S	OPP	08	
		S (150)	137	190	37	S4	CLUTCH SHIFT		8295S	OPP	08	
		T (165)	150	175	34	S4	CLUTCH SHIFT		8295S	OPP	08	
	6800	Forward (55)	67	150	30	S4			8295S	BOTH	08	
		Reverse (52)	76	150	30	S4			8295S	BOTH	08	
	8000	Forward (40)	38	500	95	S4			8295S	BOTH	08	
		Reverse (50)	45	500	95	S4			8295S	BOTH	08	
	8500	B (57)	35	500	95	S4			8295S	OPP	08	
		C (70)	46	500	95	S4			8295S	OPP	08	
		E (86)	55	480	90	S4			8295S	OPP	08	
		J (105)	68	450	86	S4			8295S	OPP	08	
		O (127)	78	400	76	S4			8295S	OPP	08	
		R (137)	86	360	68	S4			8295S	OPP	08	
		S (150)	94	320	62	S4			8295S	OPP	08	
		T (165)	104	280	54	S4			8295S	OPP	08	


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

5652A(8-BOLT&6-BOLTOPENING) **5752(8-BOLT&6-BOLTOPENING)** **SPIC.15**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		24	250	49	INCL			OPP	03	
		C (73)		32	250	49	INCL			OPP	03	
		E (86)		39	225	44	INCL			OPP	03	
		J (95)		42	225	44	INCL			OPP	03	3L 
		O (125)		56	200	39	INCL			OPP	03	
		R (137)		61	200	39	INCL			OPP	03	
		S (150)		67	190	37	INCL			OPP	03	
		T (165)		73	175	34	INCL			OPP	03	
	3200	Z (40)		16	250	49	INCL	CLUTCH SHIFT		OPP	03	
		A (50)		20	250	49	INCL	CLUTCH SHIFT		OPP	03	
		B (55)		22	250	49	INCL	CLUTCH SHIFT		OPP	03	
		C (73)		30	250	49	INCL	CLUTCH SHIFT		OPP	03	
		E (86)		36	225	44	INCL	CLUTCH SHIFT		OPP	03	3L 
		J (95)		39	225	44	INCL	CLUTCH SHIFT		OPP	03	
		O (125)		51	200	39	INCL	CLUTCH SHIFT		OPP	03	
		R (137)		56	200	39	INCL	CLUTCH SHIFT		OPP	03	
		S (150)		61	190	37	INCL	CLUTCH SHIFT		OPP	03	
		T (165)		67	175	34	INCL	CLUTCH SHIFT		OPP	03	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		S4		8190S	OPP	08	
		B (55)		44	250	49	S4		8190S	OPP	08	
		C (73)		58	250	49	S4		8190S	OPP	08	
		E (86)		69	225	44	S4		8190S	OPP	08	
		J (95)		76	225	44	S4		8190S	OPP	08	1R 
		O (125)		100	200	39	S4		8190S	OPP	08	
		R (137)		109	200	39	S4		8190S	OPP	08	
		S (150)		119	190	37	S4		8190S	OPP	08	
		T (165)		131	175	34	S4		8190S	OPP	08	

CONTINUES →

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

5652A(8-BOLT&6-BOLTOPENING) **5752(8-BOLT&6-BOLTOPENING)** **SPIC.15**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	35	250	49	S4	CLUTCH SHIFT		8190S	OPP	08	
		A (50)	43	250	49	S4	CLUTCH SHIFT		8190S	OPP	08	
		B (55)	48	250	49	S4	CLUTCH SHIFT		8190S	OPP	08	
		C (73)	63	250	49	S4	CLUTCH SHIFT		8190S	OPP	08	
		E (86)	76	225	44	S4	CLUTCH SHIFT		8190S	OPP	08	
		J (95)	83	225	44	S4	CLUTCH SHIFT		8190S	OPP	08	
		O (125)	109	200	39	S4	CLUTCH SHIFT		8190S	OPP	08	
		R (137)	119	200	39	S4	CLUTCH SHIFT		8190S	OPP	08	
		S (150)	130	190	37	S4	CLUTCH SHIFT		8190S	OPP	08	
		T (165)	143	175	34	S4	CLUTCH SHIFT		8190S	OPP	08	
	6800	Forward (55)	63	150	30	S4			8190S	BOTH	08	
		Reverse (52)	72	150	30	S4			8190S	BOTH	08	
	8000	Forward (40)	36	500	95	S4			8190S	BOTH	08	
		Reverse (50)	43	500	95	S4			8190S	BOTH	08	
	8500	B (57)	33	500	95	S4			8190S	OPP	08	
		C (70)	44	500	95	S4			8190S	OPP	08	
		E (86)	52	480	90	S4			8190S	OPP	08	
		J (105)	64	450	86	S4			8190S	OPP	08	
		O (127)	75	400	76	S4			8190S	OPP	08	
		R (137)	82	360	68	S4			8190S	OPP	08	
		S (150)	90	320	62	S4			8190S	OPP	08	
		T (165)	99	280	54	S4			8190S	OPP	08	



For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

CM-4054A(301329)(301420) **ES42-5A(301438)**



SPIC.16

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		43	250	49	INCL			OPP	11	
		C (73)		57	250	49	INCL			OPP	11	
		E (86)		68	225	44	INCL			OPP	11	
		J (95)		74	225	44	INCL			OPP	11	
		O (125)		98	200	39	INCL			OPP	11	
		R (137)		107	200	39	INCL			OPP	11	
		S (150)		118	190	37	INCL			OPP	11	
		T (165)		129	175	34	INCL			OPP	11	
3200		Z (40)		31	250	49	INCL	CLUTCH SHIFT		OPP	11	
		A (50)		39	250	49	INCL	CLUTCH SHIFT		OPP	11	
		B (55)		43	250	49	INCL	CLUTCH SHIFT		OPP	11	
		C (73)		57	250	49	INCL	CLUTCH SHIFT		OPP	11	
		E (86)		69	225	44	INCL	CLUTCH SHIFT		OPP	11	
		J (95)		75	225	44	INCL	CLUTCH SHIFT		OPP	11	
		O (125)		98	200	39	INCL	CLUTCH SHIFT		OPP	11	
		R (137)		107	200	39	INCL	CLUTCH SHIFT		OPP	11	
		S (150)		118	190	37	INCL	CLUTCH SHIFT		OPP	11	
		T (165)		129	175	34	INCL	CLUTCH SHIFT		OPP	11	
6000		Forward (73)		57	150	30	INCL			BOTH	11	
		Reverse (83)		65	150	30	INCL			BOTH	11	

For complete part numbers, consult the PTO Series section (page 25)

CM-4054D(301343)(301421) **ES42-5D(301439)**

SPIC.17

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		45	250	49	S3	(SP10)	6140S	OPP	11	
		C (73)		60	250	49	S3	(SP10)	6140S	OPP	11	
		E (86)		72	225	44	S3	(SP10)	6140S	OPP	11	
		J (95)		78	225	44	S3	(SP10)	6140S	OPP	11	
		O (125)		103	200	39	S3	(SP10)	6140S	OPP	11	
		R (137)		113	200	39	S3	(SP10)	6140S	OPP	11	
		S (150)		123	190	37	S3	(SP10)	6140S	OPP	11	
		T (165)		136	175	34	S3	(SP10)	6140S	OPP	11	
3200		Z (40)		33	250	49	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		A (50)		41	250	49	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		B (55)		45	250	49	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		C (73)		60	250	49	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		E (86)		72	225	44	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		J (95)		79	225	44	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		O (125)		103	200	39	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		R (137)		113	200	39	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		S (150)		123	190	37	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
		T (165)		136	175	34	S3	(SP10) CLUTCH SHIFT	6140S	OPP	11	
6000		Forward (73)		60	150	30	S3	(SP10)	6140S	BOTH	11	
		Reverse (83)		68	150	30	S3	(SP10)	6140S	BOTH	11	

FOOT NOTES:

SP10: PTO's may interfere with a brake mechanism located on this side of the transmission.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-5052A(301068)(301472)
CM-5052C(301249)(301080)
CM-5510(301315)(301371)
CM-5552A(301309)(301366)
CM-5552C(301311)(301368)
CM-5952A(301360)
CM-5952C(301362)
ES60-5A(301460)
ES60-5C(301461)
ES60-5F(301482)
ES62-5A(301528)
ES67-5A(301532)

SPIC.18

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		46	250	49	S5		6400S	OPP	08	
		C (73)		61	250	49	S5		6400S	OPP	08	
		E (86)		73	225	44	S5		6400S	OPP	08	
		J (95)		80	225	44	S5		6400S	OPP	08	3L
	1000	O (125)		105	200	39	S5		6400S	OPP	08	
		R (137)		115	200	39	S5		6400S	OPP	08	
		S (150)		126	190	37	S5		6400S	OPP	08	
		T (165)		138	175	34	S5		6400S	OPP	08	
		Z (40)		33	250	49	S5	CLUTCH SHIFT	6400S	OPP	08	
		A (50)		42	250	49	S5	CLUTCH SHIFT	6400S	OPP	08	
		B (55)		46	250	49	S5	CLUTCH SHIFT	6400S	OPP	08	
		C (73)		61	250	49	S5	CLUTCH SHIFT	6400S	OPP	08	
		E (86)		73	225	44	S5	CLUTCH SHIFT	6400S	OPP	08	3L
	3200	J (95)		80	225	44	S5	CLUTCH SHIFT	6400S	OPP	08	
		O (125)		105	200	39	S5	CLUTCH SHIFT	6400S	OPP	08	
		R (137)		115	200	39	S5	CLUTCH SHIFT	6400S	OPP	08	
		S (150)		126	190	37	S5	CLUTCH SHIFT	6400S	OPP	08	
		T (165)		138	175	34	S5	CLUTCH SHIFT	6400S	OPP	08	
	6000	Forward (73)		61	150	30	S5		6400S	BOTH	08	3L
		Reverse (83)		69	150	30	S5		6400S	BOTH	08	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)			250		S4	(SP7) GA8093	8248S	OPP	08	
		B (55)		46	250	49	S4	(SP7) GA8093	8248S	OPP	08	
		C (73)		61	250	49	S4	(SP7) GA8093	8248S	OPP	08	
		E (86)		73	225	44	S4	(SP7) GA8093	8248S	OPP	08	
		J (95)		80	225	44	S4	(SP7) GA8093	8248S	OPP	08	1R
	2000	O (125)		105	200	39	S4	(SP7) GA8093	8248S	OPP	08	
		R (137)		115	200	39	S4	(SP7) GA8093	8248S	OPP	08	
		S (150)		126	190	37	S4	(SP7) GA8093	8248S	OPP	08	
		T (165)		138	175	34	S4	(SP7) GA8093	8248S	OPP	08	



CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Spicer

CM-5052A(301068)(301472)
CM-5052C(301249)(301080)
CM-5510(301315)(301371)
CM-5552A(301309)(301366)
CM-5552C(301311)(301368)
CM-5952A(301360)
CM-5952C(301362)
ES60-5A(301460)
ES60-5C(301461)
ES60-5F(301482)
ES62-5A(301528)
ES67-5A(301532)

SPIC.18

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)		37	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		A (50)		46	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		B (55)		50	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		C (73)		67	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		E (86)		80	225	44	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		J (95)		87	225	44	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		O (125)		114	200	39	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		R (137)		125	200	39	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		S (150)		137	190	37	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
		T (165)		150	175	34	S4	(SP7) GA8093 CLUTCH SHIFT	8248S	OPP	08	
	6800	Forward (55)		67	150	30	S4	(SP7) GA8093	8248S	BOTH	08	
		Reverse (52)		76	150	30	S4	(SP7) GA8093	8248S	BOTH	08	
	8000	Forward (40)		38	500	95	S4	(SP7) GA8093	8248S	BOTH	08	
		Reverse (50)		45	500	95	S4	(SP7) GA8093	8248S	BOTH	08	
	8500	B (57)		35	500	95	S4	(SP7) GA8093	8248S	OPP	08	
		C (70)		46	500	95	S4	(SP7) GA8093	8248S	OPP	08	
		E (86)		55	480	90	S4	(SP7) GA8093	8248S	OPP	08	
		J (105)		68	450	86	S4	(SP7) GA8093	8248S	OPP	08	
		O (127)		78	400	76	S4	(SP7) GA8093	8248S	OPP	08	
		R (137)		86	360	68	S4	(SP7) GA8093	8248S	OPP	08	
		S (150)		94	320	62	S4	(SP7) GA8093	8248S	OPP	08	
		T (165)		104	280	54	S4	(SP7) GA8093	8248S	OPP	08	

FOOT NOTES:

SP7: Use "3" assembly arrangement for MACK Midliner.


Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-5052B(301248)(301079) **CM-5552B(301310)(301367)** **CM-5952B(301361)**

SPIC.19

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		44	250	49	S3		6200S	OPP	08	
		C (73)		58	250	49	S3		6200S	OPP	08	
		E (86)		69	225	44	S3		6200S	OPP	08	
		J (95)		76	225	44	S3		6200S	OPP	08	
		O (125)		100	200	39	S3		6200S	OPP	08	
		R (137)		109	200	39	S3		6200S	OPP	08	
		S (150)		119	190	37	S3		6200S	OPP	08	
		T (165)		131	175	34	S3		6200S	OPP	08	
3200		Z (40)		32	250	49	S3	CLUTCH SHIFT	6200S	OPP	08	
		A (50)		40	250	49	S3	CLUTCH SHIFT	6200S	OPP	08	
		B (55)		44	250	49	S3	CLUTCH SHIFT	6200S	OPP	08	
		C (73)		58	250	49	S3	CLUTCH SHIFT	6200S	OPP	08	
		E (86)		70	225	44	S3	CLUTCH SHIFT	6200S	OPP	08	
		J (95)		76	225	44	S3	CLUTCH SHIFT	6200S	OPP	08	
		O (125)		100	200	39	S3	CLUTCH SHIFT	6200S	OPP	08	
		R (137)		109	200	39	S3	CLUTCH SHIFT	6200S	OPP	08	
		S (150)		119	190	37	S3	CLUTCH SHIFT	6200S	OPP	08	
		T (165)		131	175	34	S3	CLUTCH SHIFT	6200S	OPP	08	
6000		Forward (73)		58	150	30	S3		6200S	BOTH	08	
		Reverse (83)		66	150	30	S3		6200S	BOTH	08	



8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)			250		INCL	GA8062	8093S	OPP	08	
		B (55)		44	250	49	INCL	GA8062	8093S	OPP	08	
		C (73)		58	250	49	INCL	GA8062	8093S	OPP	08	
		E (86)		69	225	44	INCL	GA8062	8093S	OPP	08	
		J (95)		76	225	44	INCL	GA8062	8093S	OPP	08	
		O (125)		100	200	39	INCL	GA8062	8093S	OPP	08	
		R (137)		109	200	39	INCL	GA8062	8093S	OPP	08	
		S (150)		119	190	37	INCL	GA8062	8093S	OPP	08	
		T (165)		131	175	34	INCL	GA8062	8093S	OPP	08	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Spicer

CM-5052B(301248)(301079) **CM-5552B(301310)(301367)** **CM-5952B(301361)** **SPIC.19**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
		Z (40)		35	250	49	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
		A (50)		43	250	49	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
		B (55)		48	250	49	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
		C (73)		63	250	49	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
		E (86)		76	225	44	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
	3800	J (95)		83	225	44	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
		O (125)		109	200	39	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
		R (137)		119	200	39	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
		S (150)		130	190	37	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
		T (165)		143	175	34	INCL	GA8062 CLUTCH SHIFT	8093S	OPP	08	
	6800	Forward (55)		63	150	30	INCL	GA8062	8093S	BOTH	08	
		Reverse (52)		72	150	30	INCL	GA8062	8093S	BOTH	08	
	8000	Forward (40)		36	500	95	INCL	GA8062	8093S	BOTH	08	
		Reverse (50)		43	500	95	INCL	GA8062	8093S	BOTH	08	
		B (57)		33	500	95	INCL	GA8062	8093S	OPP	08	
		C (70)		44	500	95	INCL	GA8062	8093S	OPP	08	
		E (86)		52	480	90	INCL	GA8062	8093S	OPP	08	
	8500	J (105)		64	450	86	INCL	GA8062	8093S	OPP	08	
		O (127)		75	400	76	INCL	GA8062	8093S	OPP	08	
		R (137)		82	360	68	INCL	GA8062	8093S	OPP	08	
		S (150)		90	320	62	INCL	GA8062	8093S	OPP	08	
		T (165)		99	280	54	INCL	GA8062	8093S	OPP	08	

For complete part numbers, consult the PTO Series section (page 25)


Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com


CM-5052D(301250)(301230)
CM-5552D(301312)(301369)
CM-5952D(301363)

ES55-5D
ES60-5D(301462)
ES62-5D(301530)

ES67-5D(301534)
ES68-5D

SPIC.20

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		48	250	49	S5		6500S	OPP	08	
		C (73)		64	250	49	S5		6500S	OPP	08	
		E (86)		77	225	44	S5		6500S	OPP	08	
		J (95)		84	225	44	S5		6500S	OPP	08	
		O (125)		110	200	39	S5		6500S	OPP	08	
		R (137)		121	200	39	S5		6500S	OPP	08	
		S (150)		132	190	37	S5		6500S	OPP	08	
		T (165)		145	175	34	S5		6500S	OPP	08	
	3200	Z (40)		35	250	49	S5	CLUTCH SHIFT	6500S	OPP	08	
		A (50)		44	250	49	S5	CLUTCH SHIFT	6500S	OPP	08	
		B (55)		48	250	49	S5	CLUTCH SHIFT	6500S	OPP	08	
		C (73)		64	250	49	S5	CLUTCH SHIFT	6500S	OPP	08	
		E (86)		77	225	44	S5	CLUTCH SHIFT	6500S	OPP	08	
		J (95)		84	225	44	S5	CLUTCH SHIFT	6500S	OPP	08	
		O (125)		110	200	39	S5	CLUTCH SHIFT	6500S	OPP	08	
		R (137)		120	200	39	S5	CLUTCH SHIFT	6500S	OPP	08	
		S (150)		132	190	37	S5	CLUTCH SHIFT	6500S	OPP	08	
		T (165)		145	175	34	S5	CLUTCH SHIFT	6500S	OPP	08	
	6000	Forward (73)		64	150	30	S5		6500S	BOTH	08	
		Reverse (83)		73	150	30	S5		6500S	BOTH	08	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		S4	(SP7) GA8093	8375S	OPP	08	
		B (55)		48	250	49	S4	(SP7) GA8093	8375S	OPP	08	
		C (73)		64	250	49	S4	(SP7) GA8093	8375S	OPP	08	
		E (86)		77	225	44	S4	(SP7) GA8093	8375S	OPP	08	
		J (95)		84	225	44	S4	(SP7) GA8093	8375S	OPP	08	
		O (125)		110	200	39	S4	(SP7) GA8093	8375S	OPP	08	
		R (137)		121	200	39	S4	(SP7) GA8093	8375S	OPP	08	
		S (150)		132	190	37	S4	(SP7) GA8093	8375S	OPP	08	
		T (165)		145	175	34	S4	(SP7) GA8093	8375S	OPP	08	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)




Spicer

CM-5052D(301250)(301230)
CM-5552D(301312)(301369)
CM-5952D(301363)

ES55-5D
ES60-5D(301462)
ES62-5D(301530)

ES67-5D(301534)
ES68-5D

SPIC.20

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
		Z (40)		38	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		A (50)		48	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		B (55)		53	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		C (73)		70	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		E (86)		84	225	44	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
	3800	J (95)		92	225	44	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		O (125)		120	200	39	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		R (137)		131	200	39	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		S (150)		144	190	37	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		T (165)		158	175	34	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
	6800	Forward (55)		70	150	30	S4	(SP7) GA8093	8375S	BOTH	08	
		Reverse (52)		80	150	30	S4	(SP7) GA8093	8375S	BOTH	08	
	8000	Forward (40)		40	500	95	S4	(SP7) GA8093	8375S	BOTH	08	
		Reverse (50)		47	500	95	S4	(SP7) GA8093	8375S	BOTH	08	
		B (57)		36	500	95	S4	(SP7) GA8093	8375S	OPP	08	
		C (70)		48	500	95	S4	(SP7) GA8093	8375S	OPP	08	
		E (86)		57	480	90	S4	(SP7) GA8093	8375S	OPP	08	
		J (105)		71	450	86	S4	(SP7) GA8093	8375S	OPP	08	
	8500	O (127)		82	400	76	S4	(SP7) GA8093	8375S	OPP	08	
		R (137)		90	360	68	S4	(SP7) GA8093	8375S	OPP	08	
		S (150)		99	320	62	S4	(SP7) GA8093	8375S	OPP	08	
		T (165)		109	280	54	S4	(SP7) GA8093	8375S	OPP	08	

FOOT NOTES:

SP7: Use "3" assembly arrangement for MACK Midliner.



SP8: Multiply speeds shown by .92 for transmission model CM-5052-D.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

1007-2A(301117)(301206)
1062A(301101)
1064A(301102)
1207-2A(301195)
1362A(301169)
1462A(301173)

SPIC.21




6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		56	250	49	S9	6140S	AD530-1X	ENG	01	 1R
		C (73)		75	250	49	S9	6140S	AD530-1X	ENG	01	
		E (86)		89	225	44	S9	6140S	AD530-1X	ENG	01	
		J (95)		97	225	44	S9	6140S	AD530-1X	ENG	01	
		O (125)		128	200	39	S9	6140S	AD530-1X	ENG	01	
		R (137)		140	200	39	S9	6140S	AD530-1X	ENG	01	
		S (150)		153	190	37	S9	6140S	AD530-1X	ENG	01	
		T (165)		169	175	34	S9	6140S	AD530-1X	ENG	01	
3200		Z (40)		41	250	49	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	 1R
		A (50)		51	250	49	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		B (55)		56	250	49	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		C (73)		75	250	49	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		E (86)		89	225	44	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		J (95)		98	225	44	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		O (125)		128	200	39	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		R (137)		140	200	39	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		S (150)		153	190	37	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		T (165)		168	175	34	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
6000		Forward (73)		75	150	30	S9	6140S	AD530-1X	BOTH	01	 1R
		Reverse (83)		85	150	30	S9	6140S	AD530-1X	BOTH	01	

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1052A(301091)
1054A(301092)
1352A(301235)
PS105-7LL(301464)
PS130-5A(301470)
PS130-6L(301465)
T-9505-2A(301408)
T-9505-2B(301425)

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		54	250	49	S9	AD530-1X/GA6093	6562S/6800S	ENG	01	
		C (73)		71	250	49	S9	AD530-1X/GA6093	6562S/6800S	ENG	01	
		E (86)		85	225	44	S9	AD530-1X/GA6093	6562S/6800S	ENG	01	
		J (95)		93	225	44	S9	AD530-1X/GA6093	6562S/6800S	ENG	01	
		O (125)		122	200	39	S9	AD530-1X/GA6093	6562S/6800S	ENG	01	
		R (137)		134	200	39	S9	AD530-1X/GA6093	6562S/6800S	ENG	01	
		S (150)		147	190	37	S9	AD530-1X/GA6093	6562S/6800S	ENG	01	
		T (165)		161	175	34	S9	AD530-1X/GA6093	6562S/6800S	ENG	01	
	3200	Z (40)		39	250	49	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		A (50)		49	250	49	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		B (55)		54	250	49	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		C (73)		71	250	49	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		E (86)		86	225	44	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		J (95)		93	225	44	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		O (125)		122	200	39	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		R (137)		134	200	39	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		S (150)		147	190	37	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
		T (165)		161	175	34	S9	AD530-1X/GA6093 CLUTCH SHIFT	6562S/6800S	ENG	01	
	6000	Forward (73)		71	150	30	S9	AD530-1X/GA6093	6562S/6800S	BOTH	01	
		Reverse (83)		81	150	30	S9	AD530-1X/GA6093	6562S/6800S	BOTH	01	

FOOT NOTES:


SP14: There is no PTO application for bottom opening due to non-standard mounting depth. Adapters are not approved for this transmission opening.

Spicer TTC


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

1062B(301103) 1062D(301148) 1064B(301104) 1064D(301149) 1272B(301158) 1274B(301159) SPIC.23

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1010		B (55)		60	250	49	INCL		6140S	OPP	01	 1R
		C (73)		80	250	49	INCL		6140S	OPP	01	
		E (86)		95	225	44	INCL		6140S	OPP	01	
		J (95)		104	225	44	INCL		6140S	OPP	01	
		O (125)		136	200	39	INCL		6140S	OPP	01	
		R (137)		149	200	39	INCL		6140S	OPP	01	
		S (150)		164	190	37	INCL		6140S	OPP	01	
		T (165)		180	175	34	INCL		6140S	OPP	01	

PSO165-18A(301666) PSO165-18B PSO175-18A(301585) PSO175-18B PSO175-18M(301849) SPIC.24

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		71	250	49	S5	(SP16)	6450S	OPP	01	 1R
		C (73)		95	250	49	S5	(SP16)	6450S	OPP	01	
		E (86)		113	225	44	S5	(SP16)	6450S	OPP	01	
		J (95)		123	225	44	S5	(SP16)	6450S	OPP	01	
		O (125)		162	200	39	S5	(SP16)	6450S	OPP	01	
		R (137)		177	200	39	S5	(SP16)	6450S	OPP	01	
		S (150)		194	190	37	S5	(SP16)	6450S	OPP	01	
		T (165)		214	175	34	S5	(SP16)	6450S	OPP	01	
3200		Z (40)		52	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	 1R
		A (50)		65	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		B (55)		71	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		C (73)		95	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		E (86)		113	225	44	S5	CLUTCH SHIFT	6450S	OPP	01	
		J (95)		124	225	44	S5	CLUTCH SHIFT	6450S	OPP	01	
		O (125)		162	200	39	S5	CLUTCH SHIFT	6450S	OPP	01	
		R (137)		177	200	39	S5	CLUTCH SHIFT	6450S	OPP	01	
		S (150)		194	190	37	S5	CLUTCH SHIFT	6450S	OPP	01	
		T (165)		213	175	34	S5	CLUTCH SHIFT	6450S	OPP	01	
6000		Forward (73)		95	150	30	S5		6450S	BOTH	01	 1R
		Reverse (83)		108	150	30	S5		6450S	BOTH	01	

For complete part numbers, consult the PTO Series section (page 25)

Spicer

PSO165-18A(301666) **PSO165-18B** **PSO175-18A(301585)** **PSO175-18B** **PSO175-18M(301849)** **SPIC.24**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		65	250		S4	(SP16) GA8093	8248S	OPP	01	
		B (55)		71	250	49	S4	(SP16) GA8093	8248S	OPP	01	
		C (73)		95	250	49	S4	(SP16) GA8093	8248S	OPP	01	
		E (86)		113	225	44	S4	(SP16) GA8093	8248S	OPP	01	
	2000	J (95)		123	225	44	S4	(SP16) GA8093	8248S	OPP	01	
		O (125)		162	200	39	S4	(SP16) GA8093	8248S	OPP	01	↑ 1B
		R (137)		177	200	39	S4	(SP16) GA8093	8248S	OPP	01	
		S (150)		194	190	37	S4	(SP16) GA8093	8248S	OPP	01	
		T (165)		214	175	34	S4	(SP16) GA8093	8248S	OPP	01	
		Z (40)		52	250	49	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
		A (50)		65	250	49	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
		B (55)		71	250	49	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
		C (73)		95	250	49	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
		E (86)		113	225	44	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
	3800	J (95)		124	225	44	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	↑ 1B
		O (125)		162	200	39	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
		R (137)		177	200	39	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
		S (150)		194	190	37	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
		T (165)		213	175	34	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01	
		B (57)		74	450	87	S4	(SP2,16) GA8093	8248S	OPP	01	
	4100	C (70)		91	470	90	S4	(SP2,16) GA8093	8248S	OPP	01	↑ 1B
		E (86)		111	470	90	S4	(SP2,16) GA8093	8248S	OPP	01	
		J (105)		136	400	77	S4	(SP2,16) GA8093	8248S	OPP	01	
		Output 1 C (96)		125	420	80	INCL	(SP2,16) GA8093		OPP	01	
		Output 2 B (89)		116	420	80	INCL	(SP2,16) GA8093		OPP	01	
		Output 1 E (112)		146	400	76.5	INCL	(SP2,16) GA8093		OPP	01	
	4250	Output 2 C (104)		135	420	80	INCL	(SP2,16) GA8093		OPP	01	
		Output 1 J (132)		171	380	73	INCL	(SP2,16) GA8093		OPP	01	↑ 1B
		Output 2 E (121)		157	400	76.5	INCL	(SP2,16) GA8093		OPP	01	
		Output 1 O (168)		218	350	67	INCL	(SP2,16) GA8093		OPP	01	
		Output 2 J (152)		197	380	73	INCL	(SP2,16) GA8093		OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

PSO165-18A(301666) **PSO165-18B** **PSO175-18A(301585)** **PSO175-18B** **PSO175-18M(301849)** **SPIC.24**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	6800	Forward (55)	95	150	30	S4	(SP16) GA8093	8248S	BOTH	01		 ↑ 1B
		Reverse (52)	108	150	30	S4	(SP16) GA8093	8248S	BOTH	01		
	8000	Forward (40)	53	500	95	S4	(SP16) GA8093	8248S	BOTH	01		 ↑ 1B
		Reverse (50)	64	500	95	S4	(SP16) GA8093	8248S	BOTH	01		
	8500	B (57)	49	500	95	S4	(SP16) GA8093	8248S	OPP	01		 ↑ 1B
		C (70)	65	500	95	S4	(SP16) GA8093	8248S	OPP	01		
		E (86)	77	480	90	S4	(SP16) GA8093	8248S	OPP	01		
		J (105)	96	450	86	S4	(SP16) GA8093	8248S	OPP	01		
		O (127)	111	400	76	S4	(SP16) GA8093	8248S	OPP	01		
		R (137)	122	360	68	S4	(SP16) GA8093	8248S	OPP	01		
		S (150)	134	320	62	S4	(SP16) GA8093	8248S	OPP	01		
		T (165)	147	280	54	S4	(SP16) GA8093	8248S	OPP	01		

FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.



SP16: Speeds shown with transmission in high range. Multiply speeds by .84 for low range.

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

TSPO165-18A **TSPO165-18HP**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		71	250	49	S5		6450S	OPP	01	
		C (73)		95	250	49	S5		6450S	OPP	01	
		E (86)		113	225	44	S5		6450S	OPP	01	
		J (95)		123	225	44	S5		6450S	OPP	01	
		O (125)		162	200	39	S5		6450S	OPP	01	
		R (137)		177	200	39	S5		6450S	OPP	01	
		S (150)		194	190	37	S5		6450S	OPP	01	
		T (165)		214	175	34	S5		6450S	OPP	01	
3200		Z (40)		52	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		A (50)		65	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		B (55)		71	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		C (73)		95	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		E (86)		113	225	44	S5	CLUTCH SHIFT	6450S	OPP	01	
		J (95)		124	225	44	S5	CLUTCH SHIFT	6450S	OPP	01	
		O (125)		162	200	39	S5	CLUTCH SHIFT	6450S	OPP	01	
		R (137)		177	200	39	S5	CLUTCH SHIFT	6450S	OPP	01	
		S (150)		194	190	37	S5	CLUTCH SHIFT	6450S	OPP	01	
		T (165)		213	175	34	S5	CLUTCH SHIFT	6450S	OPP	01	
6000		Forward (73)		95	150	30	S5		6450S	BOTH	01	
		Reverse (83)		108	150	30	S5		6450S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		71	250		S4	(SP16) GA8093	8248S	OPP	01	
		B (55)		71	250	49	S4	(SP16) GA8093	8248S	OPP	01	
		C (73)		95	250	49	S4	(SP16) GA8093	8248S	OPP	01	
		E (86)		113	225	44	S4	(SP16) GA8093	8248S	OPP	01	
		J (95)		123	225	44	S4	(SP16) GA8093	8248S	OPP	01	
		O (125)		162	200	39	S4	(SP16) GA8093	8248S	OPP	01	
		R (137)		177	200	39	S4	(SP16) GA8093	8248S	OPP	01	
		S (150)		194	190	37	S4	(SP16) GA8093	8248S	OPP	01	
		T (165)		214	175	34	S4	(SP16) GA8093	8248S	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

TSPO165-18A, **TSPO165-18HP**

SPIC.25

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	52	250	49	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		A (50)	65	250	49	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		B (55)	71	250	49	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		C (73)	95	250	49	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		E (86)	113	225	44	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		J (95)	124	225	44	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		O (125)	162	200	39	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		R (137)	177	200	39	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		S (150)	194	190	37	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
		T (165)	213	175	34	S4	(SP16) GA8093 CLUTCH SHIFT	8248S	OPP	01		
	4100	B (57)	74	450	87	S4	(SP2,16) GA8093	8248S	OPP	01		
		C (70)	91	470	90	S4	(SP2,16) GA8093	8248S	OPP	01		
		E (86)	111	470	90	S4	(SP2,16) GA8093	8248S	OPP	01		
		J (105)	136	400	77	S4	(SP2,16) GA8093	8248S	OPP	01		
	4250	Output 1 C (96)	125	420	80	INCL	(SP2,16) GA8093		OPP	01		
		Output 2 B (89)	116	420	80	INCL	(SP2,16) GA8093		OPP	01		
		Output 1 E (112)	146	400	76.5	INCL	(SP2,16) GA8093		OPP	01		
		Output 2 C (104)	135	420	80	INCL	(SP2,16) GA8093		OPP	01		
		Output 1 J (132)	171	380	73	INCL	(SP2,16) GA8093		OPP	01		
		Output 2 E (121)	157	400	76.5	INCL	(SP2,16) GA8093		OPP	01		
		Output 1 O (168)	218	350	67	INCL	(SP2,16) GA8093		OPP	01		
		Output 2 J (152)	197	380	73	INCL	(SP2,16) GA8093		OPP	01		
	6800	Forward (55)	95	150	30	S4	(SP16) GA8093	8248S	BOTH	01		
		Reverse (52)	108	150	30	S4	(SP16) GA8093	8248S	BOTH	01		
	8000	Forward (40)	53	500	95	S4	(SP16) GA8093	8248S	BOTH	01		
		Reverse (50)	64	500	95	S4	(SP16) GA8093	8248S	BOTH	01		
	8500	B (57)	49	500	95	S4	(SP16) GA8093	8248S	OPP	01		
		C (70)	65	500	95	S4	(SP16) GA8093	8248S	OPP	01		
		E (86)	77	480	90	S4	(SP16) GA8093	8248S	OPP	01		
		J (105)	96	450	86	S4	(SP16) GA8093	8248S	OPP	01		
		O (127)	111	400	76	S4	(SP16) GA8093	8248S	OPP	01		
		R (137)	122	360	68	S4	(SP16) GA8093	8248S	OPP	01		
		S (150)	134	320	62	S4	(SP16) GA8093	8248S	OPP	01		
		T (165)	147	280	54	S4	(SP16) GA8093	8248S	OPP	01		


↑ 1B


↑ 1B


↑ 1B


↑ 1B


↑ 1B

FOOT NOTES:




SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

SP16: Speeds shown with transmission in high range. Multiply speeds by .84 for low range.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

PSO150-16B(301647) **PSO165-16B(301583)** **PSO175-16B(301584)** **PSO175-16M(301645)** **TSPO145-16B** **TSPO155-16B** **TSPO155-16HP** **TSPO165-16HP**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		73	250	49	S5	(SP17)	6450S	OPP	01	
		C (73)		97	250	49	S5	(SP17)	6450S	OPP	01	
		E (86)		115	225	44	S5	(SP17)	6450S	OPP	01	
		J (95)		126	225	44	S5	(SP17)	6450S	OPP	01	
		O (125)		165	200	39	S5	(SP17)	6450S	OPP	01	
		R (137)		181	200	39	S5	(SP17)	6450S	OPP	01	
		S (150)		199	190	37	S5	(SP17)	6450S	OPP	01	
		T (165)		218	175	34	S5	(SP17)	6450S	OPP	01	
3200		Z (40)		53	250	49	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		A (50)		66	250	49	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		B (55)		73	250	49	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		C (73)		97	250	49	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		E (86)		116	225	44	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		J (95)		127	225	44	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		O (125)		165	200	39	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		R (137)		181	200	39	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		S (150)		199	190	37	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
		T (165)		218	175	34	S5	(SP17) CLUTCH SHIFT	6450S	OPP	01	
6000		Forward (73)		97	150	30	S5	(SP17)	6450S	BOTH	01	
		Reverse (83)		110	150	30	S5	(SP17)	6450S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		66	250		S4	(SP17) 8248S	GA8093	OPP	01	
		B (55)		73	250	49	S4	(SP17) 8248S	GA8093	OPP	01	
		C (73)		97	250	49	S4	(SP17) 8248S	GA8093	OPP	01	
		E (86)		115	225	44	S4	(SP17) 8248S	GA8093	OPP	01	
		J (95)		126	225	44	S4	(SP17) 8248S	GA8093	OPP	01	
		O (125)		165	200	39	S4	(SP17) 8248S	GA8093	OPP	01	
		R (137)		181	200	39	S4	(SP17) 8248S	GA8093	OPP	01	
		S (150)		199	190	37	S4	(SP17) 8248S	GA8093	OPP	01	
		T (165)		218	175	34	S4	(SP17) 8248S	GA8093	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

PSO150-16B(301647) **PSO175-16B(301584)** **TSPO145-16B** **TSPO155-16HP**
PSO165-16B(301583) **PSO175-16M(301645)** **TSPO155-16B** **TSPO165-16HP**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	53	250	49	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
		A (50)	66	250	49	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
		B (55)	73	250	49	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
		C (73)	97	250	49	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
		E (86)	116	225	44	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
		J (95)	127	225	44	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
		O (125)	165	200	39	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		↑ 1B
		R (137)	181	200	39	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
		S (150)	199	190	37	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
		T (165)	218	175	34	S4	(SP17) 8248S CLUTCH SHIFT	GA8093	OPP	01		
	4100	B (57)	75	450	87	S4	(SP2,17) 8248S	GA8093	OPP	01		
		C (70)	93	470	90	S4	(SP2,17) 8248S	GA8093	OPP	01		
		E (86)	114	470	90	S4	(SP2,17) 8248S	GA8093	OPP	01		
		J (105)	139	400	77	S4	(SP2,17) 8248S	GA8093	OPP	01		↑ 1B
	4250	Output 1 C (96)	127	420	80	INCL	(SP2,17) 8248S		OPP	01		
		Output 2 B (89)	118	420	80	INCL	(SP2,17) 8248S		OPP	01		
		Output 1 E (112)	149	400	76.5	INCL	(SP2,17) 8248S		OPP	01		
		Output 2 C (104)	137	420	80	INCL	(SP2,17) 8248S		OPP	01		
		Output 1 J (132)	174	380	73	INCL	(SP2,17) 8248S		OPP	01		
		Output 2 E (121)	160	400	76.5	INCL	(SP2,17) 8248S		OPP	01		↑ 1B
		Output 1 O (168)	223	350	67	INCL	(SP2,17) 8248S		OPP	01		
		Output 2 J (152)	202	380	73	INCL	(SP2,17) 8248S		OPP	01		
	6800	Forward (55)	97	150	30	S4	(SP17) 8248S	GA8093	BOTH	01		
		Reverse (52)	110	150	30	S4	(SP17) 8248S	GA8093	BOTH	01		↑ 1B
	8000	Forward (40)	55	500	95	S4	(SP17) 8248S	GA8093	BOTH	01		
		Reverse (50)	65	500	95	S4	(SP17) 8248S	GA8093	BOTH	01		↑ 1B
	8500	B (57)	50	500	95	S4	(SP17) 8248S	GA8093	OPP	01		
		C (70)	66	500	95	S4	(SP17) 8248S	GA8093	OPP	01		
		E (86)	79	480	90	S4	(SP17) 8248S	GA8093	OPP	01		
		J (105)	98	450	86	S4	(SP17) 8248S	GA8093	OPP	01		
		O (127)	114	400	76	S4	(SP17) 8248S	GA8093	OPP	01		
		R (137)	125	360	68	S4	(SP17) 8248S	GA8093	OPP	01		↑ 1B
		S (150)	137	320	62	S4	(SP17) 8248S	GA8093	OPP	01		
		T (165)	150	280	54	S4	(SP17) 8248S	GA8093	OPP	01		

FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

SP17: Speeds shown with transmission in high range. Multiply speeds by .82 for low range.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

CM-6052A(301253)(301075)(301413)
ES65-5A(301466)

ES70-5A(301536)
ES72-5A

SPIC.29

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		55	250	49	S3		6240S	OPP	05	3L
		C (73)		73	250	49	S3		6240S	OPP	05	
		E (86)		87	225	44	S3		6240S	OPP	05	
		J (95)		94	225	44	S3		6240S	OPP	05	
		O (125)		124	200	39	S3		6240S	OPP	05	
		R (137)		136	200	39	S3		6240S	OPP	05	
		S (150)		149	190	37	S3		6240S	OPP	05	
		T (165)		164	175	34	S3		6240S	OPP	05	
3200		Z (40)		40	250	49	S3	CLUTCH SHIFT	6240S	OPP	05	3L
		A (50)		50	250	49	S3	CLUTCH SHIFT	6240S	OPP	05	
		B (55)		55	250	49	S3	CLUTCH SHIFT	6240S	OPP	05	
		C (73)		73	250	49	S3	CLUTCH SHIFT	6240S	OPP	05	
		E (86)		87	225	44	S3	CLUTCH SHIFT	6240S	OPP	05	
		J (95)		95	225	44	S3	CLUTCH SHIFT	6240S	OPP	05	
		O (125)		124	200	39	S3	CLUTCH SHIFT	6240S	OPP	05	
		R (137)		136	200	39	S3	CLUTCH SHIFT	6240S	OPP	05	
		S (150)		149	190	37	S3	CLUTCH SHIFT	6240S	OPP	05	
		T (165)		164	175	34	S3	CLUTCH SHIFT	6240S	OPP	05	
6000		Forward (73)		73	150	30	S3		6240S	BOTH	05	3L
		Reverse (83)		83	150	30	S3		6240S	BOTH	05	



For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-6052A(301253)(301075)(301413)
ES65-5A(301466)

ES70-5A(301536)
ES72-5A


SPIC.29

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		S6	GA8093	8700S	OPP	05	 1R
		B (55)		55	250	49	S6	GA8093	8700S	OPP	05	
		C (73)		73	250	49	S6	GA8093	8700S	OPP	05	
		E (86)		87	225	44	S6	GA8093	8700S	OPP	05	
		J (95)		94	225	44	S6	GA8093	8700S	OPP	05	
		O (125)		124	200	39	S6	GA8093	8700S	OPP	05	
		R (137)		136	200	39	S6	GA8093	8700S	OPP	05	
		S (150)		149	190	37	S6	GA8093	8700S	OPP	05	
		T (165)		164	175	34	S6	GA8093	8700S	OPP	05	
	3800	Z (40)		38	250	49	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	 1R
		A (50)		47	250	49	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
		B (55)		52	250	49	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
		C (73)		69	250	49	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
		E (86)		83	225	44	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
		J (95)		91	225	44	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
		O (125)		119	200	39	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
		R (137)		130	200	39	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
		S (150)		142	190	37	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
		T (165)		156	175	34	S6	GA8093 CLUTCH SHIFT	8700S	OPP	05	
	6800	Forward (55)		69	150	30	S6	GA8093	8700S	BOTH	05	 1R
		Reverse (52)		79	150	30	S6	GA8093	8700S	BOTH	05	
	8000	Forward (40)		39	500	95	S6	GA8093	8700S	BOTH	05	 1R
		Reverse (50)		47	500	95	S6	GA8093	8700S	BOTH	05	
	8500	B (57)		36	500	95	S6	GA8093	8700S	OPP	05	 1R
		C (70)		48	500	95	S6	GA8093	8700S	OPP	05	
		E (86)		57	480	90	S6	GA8093	8700S	OPP	05	
		J (105)		70	450	86	S6	GA8093	8700S	OPP	05	
		O (127)		82	400	76	S6	GA8093	8700S	OPP	05	
		R (137)		89	360	68	S6	GA8093	8700S	OPP	05	
		S (150)		98	320	62	S6	GA8093	8700S	OPP	05	
		T (165)		108	280	54	S6	GA8093	8700S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

Spicer



CM-6052B(301254)(301082)(301414) **ES65-5B(301467)** **SPIC.30**

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		52	250	49	INCL		GA6093	OPP	05	3L 
		C (73)		69	250	49	INCL		GA6093	OPP	05	
		E (86)		82	225	44	INCL		GA6093	OPP	05	
		J (95)		90	225	44	INCL		GA6093	OPP	05	
		O (125)		118	200	39	INCL		GA6093	OPP	05	
		R (137)		129	200	39	INCL		GA6093	OPP	05	
		S (150)		142	190	37	INCL		GA6093	OPP	05	
		T (165)		156	175	34	INCL		GA6093	OPP	05	
3200		Z (40)		38	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	05	3L 
		A (50)		47	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		B (55)		52	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		C (73)		69	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		E (86)		83	225	44	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		J (95)		90	225	44	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		O (125)		118	200	39	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		R (137)		129	200	39	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		S (150)		142	190	37	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		T (165)		156	175	34	INCL	CLUTCH SHIFT	GA6093	OPP	05	
6000		Forward (73)		69	150	30	INCL		GA6093	BOTH	05	3L 
		Reverse (83)		78	150	30	INCL		GA6093	BOTH	05	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-6052B(301254)(301082)(301414) **ES65-5B(301467)** **SPIC.30**

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
	2000	A (50)			250		S6		8600S	OPP	05	 1R
		B (55)		52	250	49	S6		8600S	OPP	05	
		C (73)		69	250	49	S6		8600S	OPP	05	
		E (86)		82	225	44	S6		8600S	OPP	05	
		J (95)		90	225	44	S6		8600S	OPP	05	
		O (125)		118	200	39	S6		8600S	OPP	05	
		R (137)		129	200	39	S6		8600S	OPP	05	
		S (150)		142	190	37	S6		8600S	OPP	05	
		T (165)		156	175	34	S6		8600S	OPP	05	
	3800	Z (40)		36	250	49	S6	CLUTCH SHIFT	8600S	OPP	05	 1R
		A (50)		45	250	49	S6	CLUTCH SHIFT	8600S	OPP	05	
		B (55)		50	250	49	S6	CLUTCH SHIFT	8600S	OPP	05	
		C (73)		66	250	49	S6	CLUTCH SHIFT	8600S	OPP	05	
		E (86)		79	225	44	S6	CLUTCH SHIFT	8600S	OPP	05	
		J (95)		86	225	44	S6	CLUTCH SHIFT	8600S	OPP	05	
		O (125)		113	200	39	S6	CLUTCH SHIFT	8600S	OPP	05	
		R (137)		123	200	39	S6	CLUTCH SHIFT	8600S	OPP	05	
		S (150)		135	190	37	S6	CLUTCH SHIFT	8600S	OPP	05	
		T (165)		148	175	34	S6	CLUTCH SHIFT	8600S	OPP	05	
	6800	Forward (55)		66	150	30	S6		8600S	BOTH	05	 1R
		Reverse (52)		75	150	30	S6		8600S	BOTH	05	
	8000	Forward (40)		37	500	95	S6		8600S	BOTH	05	 1R
		Reverse (50)		44	500	95	S6		8600S	BOTH	05	
	8500	B (57)		34	500	95	S6		8600S	OPP	05	 1R
		C (70)		45	500	95	S6		8600S	OPP	05	
		E (86)		54	480	90	S6		8600S	OPP	05	
		J (105)		67	450	86	S6		8600S	OPP	05	
		O (127)		77	400	76	S6		8600S	OPP	05	
		R (137)		85	360	68	S6		8600S	OPP	05	
		S (150)		93	320	62	S6		8600S	OPP	05	
		T (165)		102	280	54	S6		8600S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)


Spicer

CM-6052D(301256)(301416)
CV67F

ES65-5D(301469)
ES70-5D(301539)

ES72-5C
ES72-5D

SPIC.31



6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		57	250	49	S5		6450S	OPP	05	
		C (73)		76	250	49	S5		6450S	OPP	05	
		E (86)		91	225	44	S5		6450S	OPP	05	
		J (95)		99	225	44	S5		6450S	OPP	05	
		O (125)		131	200	39	S5		6450S	OPP	05	
		R (137)		143	200	39	S5		6450S	OPP	05	
		S (150)		157	190	37	S5		6450S	OPP	05	
		T (165)		172	175	34	S5		6450S	OPP	05	
3200		Z (40)		42	250	49	S5	CLUTCH SHIFT	6450S	OPP	05	
		A (50)		52	250	49	S5	CLUTCH SHIFT	6450S	OPP	05	
		B (55)		57	250	49	S5	CLUTCH SHIFT	6450S	OPP	05	
		C (73)		76	250	49	S5	CLUTCH SHIFT	6450S	OPP	05	
		E (86)		91	225	44	S5	CLUTCH SHIFT	6450S	OPP	05	
		J (95)		100	225	44	S5	CLUTCH SHIFT	6450S	OPP	05	
		O (125)		131	200	39	S5	CLUTCH SHIFT	6450S	OPP	05	
		R (137)		143	200	39	S5	CLUTCH SHIFT	6450S	OPP	05	
		S (150)		157	190	37	S5	CLUTCH SHIFT	6450S	OPP	05	
		T (165)		172	175	34	S5	CLUTCH SHIFT	6450S	OPP	05	
6000		Forward (73)		76	150	30	S5		6450S	BOTH	05	
		Reverse (83)		87	150	30	S5		6450S	BOTH	05	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-6052D(301256)(301416)
CV67F
ES65-5D(301469)
ES70-5D(301539)
ES72-5C
ES72-5D


SPIC.31

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
	2000	A (50)			250		S8	8375S	8600S	OPP	05	 1R
		B (55)		57	250	49	S8	8375S	8600S	OPP	05	
		C (73)		76	250	49	S8	8375S	8600S	OPP	05	
		E (86)		91	225	44	S8	8375S	8600S	OPP	05	
		J (95)		99	225	44	S8	8375S	8600S	OPP	05	
		O (125)		131	200	39	S8	8375S	8600S	OPP	05	
		R (137)		143	200	39	S8	8375S	8600S	OPP	05	
		S (150)		157	190	37	S8	8375S	8600S	OPP	05	
		T (165)		172	175	34	S8	8375S	8600S	OPP	05	
	3800	Z (40)		40	250	49	S8	8375S CLUTCH SHIFT	8600S	OPP	05	 1R
		A (50)		50	250	49	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		B (55)		55	250	49	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		C (73)		73	250	49	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		E (86)		87	225	44	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		J (95)		95	225	44	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		O (125)		125	200	39	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		R (137)		136	200	39	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		S (150)		149	190	37	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		T (165)		164	175	34	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
	6800	Forward (55)		73	150	30	S8	8375S	8600S	BOTH	05	 1R
		Reverse (52)		83	150	30	S8	8375S	8600S	BOTH	05	
	8000	Forward (40)		41	500	95	S8	8375S	8600S	BOTH	05	 1R
		Reverse (50)		49	500	95	S8	8375S	8600S	BOTH	05	
	8500	B (57)		38	500	95	S8	8375S	8600S	OPP	05	 1R
		C (70)		50	500	95	S8	8375S	8600S	OPP	05	
		E (86)		60	480	90	S8	8375S	8600S	OPP	05	
		J (105)		74	450	86	S8	8375S	8600S	OPP	05	
		O (127)		86	400	76	S8	8375S	8600S	OPP	05	
		R (137)		94	360	68	S8	8375S	8600S	OPP	05	
		S (150)		103	320	62	S8	8375S	8600S	OPP	05	
		T (165)		113	280	54	S8	8375S	8600S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

5756B(8-BOLT&6-BOLTOPENING)

SPIC.32




6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		27	250	49	INCL			OPP	03	3L 
		C (73)		35	250	49	INCL			OPP	03	
		E (86)		42	225	44	INCL			OPP	03	
		J (95)		46	225	44	INCL			OPP	03	
		O (125)		61	200	39	INCL			OPP	03	
		R (137)		66	200	39	INCL			OPP	03	
		S (150)		73	190	37	INCL			OPP	03	
		T (165)		80	175	34	INCL			OPP	03	
3200		Z (40)		19	250	49	INCL	CLUTCH SHIFT		OPP	03	3L 
		A (50)		24	250	49	INCL	CLUTCH SHIFT		OPP	03	
		B (55)		27	250	49	INCL	CLUTCH SHIFT		OPP	03	
		C (73)		35	250	49	INCL	CLUTCH SHIFT		OPP	03	
		E (86)		42	225	44	INCL	CLUTCH SHIFT		OPP	03	
		J (95)		46	225	44	INCL	CLUTCH SHIFT		OPP	03	
		O (125)		61	200	39	INCL	CLUTCH SHIFT		OPP	03	
		R (137)		66	200	39	INCL	CLUTCH SHIFT		OPP	03	
		S (150)		73	190	37	INCL	CLUTCH SHIFT		OPP	03	
		T (165)		80	175	34	INCL	CLUTCH SHIFT		OPP	03	

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

5756B(8-BOLT&6-BOLTOPENING)

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
2000		A (50)			250		INCL		8500 SHIM	OPP	03	 1R
		B (55)		57	250	49	INCL		8500 SHIM	OPP	03	
		C (73)		76	250	49	INCL		8500 SHIM	OPP	03	
		E (86)		91	225	44	INCL		8500 SHIM	OPP	03	
		J (95)		99	225	44	INCL		8500 SHIM	OPP	03	
		O (125)		130	200	39	INCL		8500 SHIM	OPP	03	
		R (137)		143	200	39	INCL		8500 SHIM	OPP	03	
		S (150)		156	190	37	INCL		8500 SHIM	OPP	03	
		T (165)		172	175	34	INCL		8500 SHIM	OPP	03	
3800		Z (40)		42	250	49	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	 1R
		A (50)		52	250	49	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
		B (55)		57	250	49	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
		C (73)		76	250	49	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
		E (86)		91	225	44	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
		J (95)		100	225	44	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
		O (125)		130	200	39	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
		R (137)		143	200	39	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
		S (150)		156	190	37	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
		T (165)		172	175	34	INCL	CLUTCH SHIFT	8500 SHIM	OPP	03	
6800		Forward (55)		76	150	30	INCL		8500 SHIM	BOTH	03	 1R
		Reverse (52)		86	150	30	INCL		8500 SHIM	BOTH	03	
8000		Forward (40)		43	500	95	INCL		8500 SHIM	BOTH	03	 1R
		Reverse (50)		51	500	95	INCL		8500 SHIM	BOTH	03	
8500		B (57)		39	500	95	INCL		8500 SHIM	OPP	03	 1R
		C (70)		52	500	95	INCL		8500 SHIM	OPP	03	
		E (86)		62	480	90	INCL		8500 SHIM	OPP	03	
		J (105)		77	450	86	INCL		8500 SHIM	OPP	03	
		O (127)		90	400	76	INCL		8500 SHIM	OPP	03	
		R (137)		98	360	68	INCL		8500 SHIM	OPP	03	
		S (150)		107	320	62	INCL		8500 SHIM	OPP	03	
		T (165)		118	280	54	INCL		8500 SHIM	OPP	03	

For complete part numbers, consult the PTO Series section (page 25)

Spicer






CM-5252A(301251)(301081) CM-5852A(301313)(301370) CM-5952E(301364) ES60-5E(301463) **SPIC.33**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		53	250	49	S5		6500S	OPP	08	3L
		C (73)		70	250	49	S5		6500S	OPP	08	
		E (86)		83	225	44	S5		6500S	OPP	08	
		J (95)		91	225	44	S5		6500S	OPP	08	
		O (125)		120	200	39	S5		6500S	OPP	08	
		R (137)		131	200	39	S5		6500S	OPP	08	
		S (150)		144	190	37	S5		6500S	OPP	08	
		T (165)		158	175	34	S5		6500S	OPP	08	
3200		Z (40)		38	250	49	S5	CLUTCH SHIFT	6500S	OPP	08	3L
		A (50)		48	250	49	S5	CLUTCH SHIFT	6500S	OPP	08	
		B (55)		53	250	49	S5	CLUTCH SHIFT	6500S	OPP	08	
		C (73)		70	250	49	S5	CLUTCH SHIFT	6500S	OPP	08	
		E (86)		84	225	44	S5	CLUTCH SHIFT	6500S	OPP	08	
		J (95)		92	225	44	S5	CLUTCH SHIFT	6500S	OPP	08	
		O (125)		120	200	39	S5	CLUTCH SHIFT	6500S	OPP	08	
		R (137)		131	200	39	S5	CLUTCH SHIFT	6500S	OPP	08	
		S (150)		144	190	37	S5	CLUTCH SHIFT	6500S	OPP	08	
		T (165)		158	175	34	S5	CLUTCH SHIFT	6500S	OPP	08	
6000		Forward (73)		70	150	30	S5		6500S	BOTH	08	3L
		Reverse (83)		79	150	30	S5		6500S	BOTH	08	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-5252A(301251)(301081) CM-5852A(301313)(301370) CM-5952E(301364) ES60-5E(301463) **SPIC.33**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		S4	(SP7) GA8093	8375S	OPP	08	
		B (55)		53	250	49	S4	(SP7) GA8093	8375S	OPP	08	
		C (73)		70	250	49	S4	(SP7) GA8093	8375S	OPP	08	
		E (86)		83	225	44	S4	(SP7) GA8093	8375S	OPP	08	
		J (95)		91	225	44	S4	(SP7) GA8093	8375S	OPP	08	 1R
		O (125)		120	200	39	S4	(SP7) GA8093	8375S	OPP	08	
		R (137)		131	200	39	S4	(SP7) GA8093	8375S	OPP	08	
		S (150)		144	190	37	S4	(SP7) GA8093	8375S	OPP	08	
		T (165)		158	175	34	S4	(SP7) GA8093	8375S	OPP	08	
	3800	Z (40)		42	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		A (50)		52	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		B (55)		57	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		C (73)		76	250	49	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		E (86)		91	225	44	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	 1R
		J (95)		100	225	44	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		O (125)		130	200	39	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		R (137)		143	200	39	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		S (150)		157	190	37	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
		T (165)		172	175	34	S4	(SP7) GA8093 CLUTCH SHIFT	8375S	OPP	08	
	6800	Forward (55)		76	150	30	S4	(SP7) GA8093	8375S	BOTH	08	 1R
		Reverse (52)		87	150	30	S4	(SP7) GA8093	8375S	BOTH	08	
	8000	Forward (40)		43	500	95	S4	(SP7) GA8093	8375S	BOTH	08	 1R
		Reverse (50)		51	500	95	S4	(SP7) GA8093	8375S	BOTH	08	
	8500	B (57)		39	500	95	S4	(SP7) GA8093	8375S	OPP	08	
		C (70)		52	500	95	S4	(SP7) GA8093	8375S	OPP	08	
		E (86)		62	480	90	S4	(SP7) GA8093	8375S	OPP	08	
		J (105)		77	450	86	S4	(SP7) GA8093	8375S	OPP	08	 1R
		O (127)		90	400	76	S4	(SP7) GA8093	8375S	OPP	08	
		R (137)		98	360	68	S4	(SP7) GA8093	8375S	OPP	08	
		S (150)		108	320	62	S4	(SP7) GA8093	8375S	OPP	08	
		T (165)		118	280	54	S4	(SP7) GA8093	8375S	OPP	08	



FOOT NOTES:

SP7: Use "3" assembly arrangement for MACK Midliner.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1252A(301094) **1254A(301095)** **1452A(301183)** **SPIC.34**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		59	250	49	S9	61520S	AD530-1X	ENG	01	 1R
		C (73)		79	250	49	S9	61520S	AD530-1X	ENG	01	
		E (86)		94	225	44	S9	61520S	AD530-1X	ENG	01	
		J (95)		102	225	44	S9	61520S	AD530-1X	ENG	01	
		O (125)		135	200	39	S9	61520S	AD530-1X	ENG	01	
		R (137)		147	200	39	S9	61520S	AD530-1X	ENG	01	
		S (150)		161	190	37	S9	61520S	AD530-1X	ENG	01	
		T (165)		178	175	34	S9	61520S	AD530-1X	ENG	01	
3200		Z (40)		43	250	49	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	 1R
		A (50)		54	250	49	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
		B (55)		59	250	49	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
		C (73)		79	250	49	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
		E (86)		94	225	44	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
		J (95)		103	225	44	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
		O (125)		135	200	39	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
		R (137)		147	200	39	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
		S (150)		161	190	37	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
		T (165)		177	175	34	S9	61520S CLUTCH SHIFT	AD530-1X	ENG	01	
6000		Forward (73)		79	150	30	S9	61520S	AD530-1X	BOTH	01	 1R
		Reverse (83)		89	150	30	S9	61520S	AD530-1X	BOTH	01	

FOOT NOTES:




SP14: There is no PTO application for bottom opening due to non-standard mounting depth. Adapters are not approved for this transmission opening.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

ES54-5C

SPIC.35

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		45	250	49	S3		GA6093	OPP	30	
		C (73)		59	250	49	S3		GA6093	OPP	30	
		E (86)		71	225	44	S3		GA6093	OPP	30	
		J (95)		77	225	44	S3		GA6093	OPP	30	
		O (125)		102	200	39	S3		GA6093	OPP	30	
		R (137)		112	200	39	S3		GA6093	OPP	30	
		S (150)		122	190	37	S3		GA6093	OPP	30	
		T (165)		134	175	34	S3		GA6093	OPP	30	
3200		Z (40)		33	250	49	S3	CLUTCH SHIFT	GA6093	OPP	30	
		A (50)		41	250	49	S3	CLUTCH SHIFT	GA6093	OPP	30	
		B (55)		45	250	49	S3	CLUTCH SHIFT	GA6093	OPP	30	
		C (73)		59	250	49	S3	CLUTCH SHIFT	GA6093	OPP	30	
		E (86)		71	225	44	S3	CLUTCH SHIFT	GA6093	OPP	30	
		J (95)		78	225	44	S3	CLUTCH SHIFT	GA6093	OPP	30	
		O (125)		102	200	39	S3	CLUTCH SHIFT	GA6093	OPP	30	
		R (137)		111	200	39	S3	CLUTCH SHIFT	GA6093	OPP	30	
		S (150)		122	190	37	S3	CLUTCH SHIFT	GA6093	OPP	30	
		T (165)		134	175	34	S3	CLUTCH SHIFT	GA6093	OPP	30	
6000		Forward (73)		59	150	30	S3		GA6093	BOTH	30	
		Reverse (83)		68	150	30	S3		GA6093	BOTH	30	



Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

6852G

SPIC.36

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		31	250	49	INCL			OPP	03	
		C (73)		42	250	49	INCL			OPP	03	
		E (86)		50	225	44	INCL			OPP	03	
		J (95)		54	225	44	INCL			OPP	03	
		O (125)		71	200	39	INCL			OPP	03	
		R (137)		78	200	39	INCL			OPP	03	
		S (150)		85	190	37	INCL			OPP	03	
		T (165)		94	175	34	INCL			OPP	03	
1000		B (55)		34	250	49	INCL		GA6093	OPP	05	
		C (73)		45	250	49	INCL		GA6093	OPP	05	
		E (86)		54	225	44	INCL		GA6093	OPP	05	
		J (95)		59	225	44	INCL		GA6093	OPP	05	
		O (125)		78	200	39	INCL		GA6093	OPP	05	
		R (137)		85	200	39	INCL		GA6093	OPP	05	
		S (150)		93	190	37	INCL		GA6093	OPP	05	
		T (165)		103	175	34	INCL		GA6093	OPP	05	
3200		Z (40)		23	250	49	INCL	CLUTCH SHIFT		OPP	03	
		A (50)		28	250	49	INCL	CLUTCH SHIFT		OPP	03	
		B (55)		31	250	49	INCL	CLUTCH SHIFT		OPP	03	
		C (73)		42	250	49	INCL	CLUTCH SHIFT		OPP	03	
		E (86)		50	225	44	INCL	CLUTCH SHIFT		OPP	03	
		J (95)		54	225	44	INCL	CLUTCH SHIFT		OPP	03	
		O (125)		71	200	39	INCL	CLUTCH SHIFT		OPP	03	
		R (137)		78	200	39	INCL	CLUTCH SHIFT		OPP	03	
		S (150)		85	190	37	INCL	CLUTCH SHIFT		OPP	03	
		T (165)		94	175	34	INCL	CLUTCH SHIFT		OPP	03	
3200		Z (40)		25	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		A (50)		31	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		B (55)		34	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		C (73)		45	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		E (86)		54	225	44	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		J (95)		60	225	44	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		O (125)		78	200	39	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		R (137)		85	200	39	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		S (150)		93	190	37	INCL	CLUTCH SHIFT	GA6093	OPP	05	
		T (165)		102	175	34	INCL	CLUTCH SHIFT	GA6093	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-6052C(301255)(301083)(301415) **ES65-5E(301468)** **SPIC.37**



6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		62	250	49	S5		6450S	OPP	05	3L 
		C (73)		83	250	49	S5		6450S	OPP	05	
		E (86)		99	225	44	S5		6450S	OPP	05	
		J (95)		108	225	44	S5		6450S	OPP	05	
		O (125)		142	200	39	S5		6450S	OPP	05	
		R (137)		156	200	39	S5		6450S	OPP	05	
		S (150)		170	190	37	S5		6450S	OPP	05	
		T (165)		187	175	34	S5		6450S	OPP	05	
3200		Z (40)		45	250	49	S5	CLUTCH SHIFT	6450S	OPP	05	3L 
		A (50)		57	250	49	S5	CLUTCH SHIFT	6450S	OPP	05	
		B (55)		62	250	49	S5	CLUTCH SHIFT	6450S	OPP	05	
		C (73)		83	250	49	S5	CLUTCH SHIFT	6450S	OPP	05	
		E (86)		99	225	44	S5	CLUTCH SHIFT	6450S	OPP	05	
		J (95)		109	225	44	S5	CLUTCH SHIFT	6450S	OPP	05	
		O (125)		142	200	39	S5	CLUTCH SHIFT	6450S	OPP	05	
		R (137)		155	200	39	S5	CLUTCH SHIFT	6450S	OPP	05	
		S (150)		170	190	37	S5	CLUTCH SHIFT	6450S	OPP	05	
		T (165)		187	175	34	S5	CLUTCH SHIFT	6450S	OPP	05	
6000		Forward (73)		83	150	30	S5		6450S	BOTH	05	3L 
		Reverse (83)		94	150	30	S5		6450S	BOTH	05	

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

CM-6052C(301255)(301083)(301415) **ES65-5E(301468)** **SPIC.37**




6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)			250		S8	8375S	8600S	OPP	05	
		B (55)		62	250	49	S8	8375S	8600S	OPP	05	
		C (73)		83	250	49	S8	8375S	8600S	OPP	05	
		E (86)		99	225	44	S8	8375S	8600S	OPP	05	
	2000	J (95)		108	225	44	S8	8375S	8600S	OPP	05	
		O (125)		142	200	39	S8	8375S	8600S	OPP	05	
		R (137)		156	200	39	S8	8375S	8600S	OPP	05	
		S (150)		170	190	37	S8	8375S	8600S	OPP	05	
		T (165)		187	175	34	S8	8375S	8600S	OPP	05	
		Z (40)		43	250	49	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		A (50)		54	250	49	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		B (55)		60	250	49	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		C (73)		79	250	49	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		E (86)		95	225	44	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
	3800	J (95)		104	225	44	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		O (125)		136	200	39	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		R (137)		148	200	39	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		S (150)		163	190	37	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
		T (165)		179	175	34	S8	8375S CLUTCH SHIFT	8600S	OPP	05	
	6800	Forward (55)		79	150	30	S8	8375S	8600S	BOTH	05	
		Reverse (52)		90	150	30	S8	8375S	8600S	BOTH	05	
	8000	Forward (40)		45	500	95	S8	8375S	8600S	BOTH	05	
		Reverse (50)		53	500	95	S8	8375S	8600S	BOTH	05	
		B (57)		41	500	95	S8	8375S	8600S	OPP	05	
		C (70)		54	500	95	S8	8375S	8600S	OPP	05	
		E (86)		65	480	90	S8	8375S	8600S	OPP	05	
	8500	J (105)		81	450	86	S8	8375S	8600S	OPP	05	
		O (127)		93	400	76	S8	8375S	8600S	OPP	05	
		R (137)		102	360	68	S8	8375S	8600S	OPP	05	
		S (150)		112	320	62	S8	8375S	8600S	OPP	05	
		T (165)		123	280	54	S8	8375S	8600S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

1262A(301105) **1264A(301106)**


6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		64	250	49	S9	6140S	AD530-1X	ENG	01	 1R
		C (73)		85	250	49	S9	6140S	AD530-1X	ENG	01	
		E (86)		101	225	44	S9	6140S	AD530-1X	ENG	01	
		J (95)		111	225	44	S9	6140S	AD530-1X	ENG	01	
		O (125)		146	200	39	S9	6140S	AD530-1X	ENG	01	
		R (137)		160	200	39	S9	6140S	AD530-1X	ENG	01	
		S (150)		175	190	37	S9	6140S	AD530-1X	ENG	01	
		T (165)		192	175	34	S9	6140S	AD530-1X	ENG	01	
3200		Z (40)		47	250	49	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	 1R
		A (50)		58	250	49	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		B (55)		64	250	49	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		C (73)		85	250	49	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		E (86)		102	225	44	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		J (95)		112	225	44	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		O (125)		146	200	39	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		R (137)		160	200	39	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		S (150)		175	190	37	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
		T (165)		192	175	34	S9	6140S CLUTCH SHIFT	AD530-1X	ENG	01	
6000		Forward (73)		85	150	30	S9	6140S	AD530-1X	BOTH	01	 1R
		Reverse (83)		97	150	30	S9	6140S	AD530-1X	BOTH	01	

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

5752C(8-BOLT&6-BOLTOPENING)





SPIC.39

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		29	250	49	INCL			OPP	03	3L 
		C (73)		38	250	49	INCL			OPP	03	
		E (86)		45	225	44	INCL			OPP	03	
		J (95)		49	225	44	INCL			OPP	03	
		O (125)		65	200	39	INCL			OPP	03	
		R (137)		71	200	39	INCL			OPP	03	
		S (150)		78	190	37	INCL			OPP	03	
		T (165)		86	175	34	INCL			OPP	03	
3200		Z (40)		19	250	49	INCL	CLUTCH SHIFT		OPP	03	3L 
		A (50)		24	250	49	INCL	CLUTCH SHIFT		OPP	03	
		B (55)		26	250	49	INCL	CLUTCH SHIFT		OPP	03	
		C (73)		35	250	49	INCL	CLUTCH SHIFT		OPP	03	
		E (86)		42	225	44	INCL	CLUTCH SHIFT		OPP	03	
		J (95)		45	225	44	INCL	CLUTCH SHIFT		OPP	03	
		O (125)		59	200	39	INCL	CLUTCH SHIFT		OPP	03	
		R (137)		65	200	39	INCL	CLUTCH SHIFT		OPP	03	
		S (150)		71	190	37	INCL	CLUTCH SHIFT		OPP	03	
		T (165)		78	175	34	INCL	CLUTCH SHIFT		OPP	03	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

5752C(8-BOLT&6-BOLTOPENING)


8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
2000		A (50)			250		S6		08375S	OPP	08	 1R
		B (55)		55	250	49	S6		08375S	OPP	08	
		C (73)		73	250	49	S6		08375S	OPP	08	
		E (086)		087	225	44	S6		08375S	OPP	08	
		J (95)		95	225	44	S6		08375S	OPP	08	
		O (125)		125	200	39	S6		08375S	OPP	08	
		R (137)		137	200	39	S6		08375S	OPP	08	
		S (150)		150	190	37	S6		08375S	OPP	08	
		T (165)		165	175	34	S6		08375S	OPP	08	
3800		Z (40)		44	250	49	S6	CLUTCH SHIFT	08375S	OPP	08	 1R
		A (50)		54	250	49	S6	CLUTCH SHIFT	08375S	OPP	08	
		B (55)		60	250	49	S6	CLUTCH SHIFT	08375S	OPP	08	
		C (73)		79	250	49	S6	CLUTCH SHIFT	08375S	OPP	08	
		E (086)		95	225	44	S6	CLUTCH SHIFT	08375S	OPP	08	
		J (95)		104	225	44	S6	CLUTCH SHIFT	08375S	OPP	08	
		O (125)		136	200	39	S6	CLUTCH SHIFT	08375S	OPP	08	
		R (137)		149	200	39	S6	CLUTCH SHIFT	08375S	OPP	08	
		S (150)		163	190	37	S6	CLUTCH SHIFT	08375S	OPP	08	
		T (165)		179	175	34	S6	CLUTCH SHIFT	08375S	OPP	08	
6800		Forward (55)		79	150	30	S6		08375S	BOTH	08	 1R
		Reverse (52)		90	150	30	S6		08375S	BOTH	08	
8000		Forward (40)		45	500	95	S6		08375S	BOTH	08	 1R
		Reverse (50)		53	500	95	S6		08375S	BOTH	08	
8500		B (57)		41	500	95	S6		08375S	OPP	08	 1R
		C (70)		55	500	95	S6		08375S	OPP	08	
		E (086)		65	4080	90	S6		08375S	OPP	08	
		J (105)		081	450	086	S6		08375S	OPP	08	
		O (127)		94	400	76	S6		08375S	OPP	08	
		R (137)		102	360	608	S6		08375S	OPP	08	
		S (150)		112	320	62	S6		08375S	OPP	08	
		T (165)		123	2080	54	S6		08375S	OPP	08	

For complete part numbers, consult the PTO Series section (page 25)

Spicer

5753A

SPIC.40




6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		29	250	49	INCL			OPP	03	3L 
		C (73)		38	250	49	INCL			OPP	03	
		E (86)		45	225	44	INCL			OPP	03	
		J (95)		49	225	44	INCL			OPP	03	
		O (125)		65	200	39	INCL			OPP	03	
		R (137)		71	200	39	INCL			OPP	03	
		S (150)		78	190	37	INCL			OPP	03	
		T (165)		86	175	34	INCL			OPP	03	
3200		Z (40)		19	250	49	INCL	CLUTCH SHIFT		OPP	03	3L 
		A (50)		24	250	49	INCL	CLUTCH SHIFT		OPP	03	
		B (55)		26	250	49	INCL	CLUTCH SHIFT		OPP	03	
		C (73)		35	250	49	INCL	CLUTCH SHIFT		OPP	03	
		E (86)		42	225	44	INCL	CLUTCH SHIFT		OPP	03	
		J (95)		45	225	44	INCL	CLUTCH SHIFT		OPP	03	
		O (125)		59	200	39	INCL	CLUTCH SHIFT		OPP	03	
		R (137)		65	200	39	INCL	CLUTCH SHIFT		OPP	03	
		S (150)		71	190	37	INCL	CLUTCH SHIFT		OPP	03	
		T (165)		78	175	34	INCL	CLUTCH SHIFT		OPP	03	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

5753A




SPIC.40

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		S6	8295S	8375S	OPP	08	 1R
		B (55)		63	250	49	S6	8295S	8375S	OPP	08	
		C (73)		83	250	49	S6	8295S	8375S	OPP	08	
		E (86)		99	225	44	S6	8295S	8375S	OPP	08	
		J (95)		108	225	44	S6	8295S	8375S	OPP	08	
		O (125)		143	200	39	S6	8295S	8375S	OPP	08	
		R (137)		156	200	39	S6	8295S	8375S	OPP	08	
		S (150)		171	190	37	S6	8295S	8375S	OPP	08	
		T (165)		188	175	34	S6	8295S	8375S	OPP	08	
	3800	Z (40)		50	250	49	S6	8295S CLUTCH SHIFT	8375S	OPP	08	 1R
		A (50)		62	250	49	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
		B (55)		68	250	49	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
		C (73)		91	250	49	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
		E (86)		109	225	44	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
		J (95)		119	225	44	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
		O (125)		155	200	39	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
		R (137)		170	200	39	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
		S (150)		187	190	37	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
		T (165)		205	175	34	S6	8295S CLUTCH SHIFT	8375S	OPP	08	
	6800	Forward (55)		91	150	30	S6	8295S	8375S	BOTH	08	 1R
		Reverse (52)		103	150	30	S6	8295S	8375S	BOTH	08	
	8000	Forward (40)		51	500	95	S6	8295S	8375S	BOTH	08	 1R
		Reverse (50)		61	500	95	S6	8295S	8375S	BOTH	08	
	8500	B (57)		47	500	95	S6	8295S	8375S	OPP	08	 1R
		C (70)		62	500	95	S6	8295S	8375S	OPP	08	
		E (86)		74	480	90	S6	8295S	8375S	OPP	08	
		J (105)		92	450	86	S6	8295S	8375S	OPP	08	
		O (127)		107	400	76	S6	8295S	8375S	OPP	08	
		R (137)		117	360	68	S6	8295S	8375S	OPP	08	
		S (150)		128	320	62	S6	8295S	8375S	OPP	08	
		T (165)		141	280	54	S6	8295S	8375S	OPP	08	

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1007-3A(301121)(301208) **1207-3A(301199)** **1263B(301109)** **PSO120-8LL(301644)** **SPIC.41**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		77	250	49	S3	GA6032	6350S	OPP	01	
		C (73)		102	250	49	S3	GA6032	6350S	OPP	01	
		E (86)		122	225	44	S3	GA6032	6350S	OPP	01	
		J (95)		133	225	44	S3	GA6032	6350S	OPP	01	
		O (125)		175	200	39	S3	GA6032	6350S	OPP	01	
		R (137)		192	200	39	S3	GA6032	6350S	OPP	01	
		S (150)		210	190	37	S3	GA6032	6350S	OPP	01	
		T (165)		231	175	34	S3	GA6032	6350S	OPP	01	
3200		Z (40)		56	250	49	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		A (50)		70	250	49	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		B (55)		77	250	49	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		C (73)		102	250	49	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		E (86)		123	225	44	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		J (95)		134	225	44	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		O (125)		175	200	39	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		R (137)		192	200	39	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		S (150)		210	190	37	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
		T (165)		231	175	34	S3	GA6032 CLUTCH SHIFT	6350S	OPP	01	
6000		Forward (73)		102	150	30	S3	GA6032	6350S	BOTH	01	
		Reverse (83)		116	150	30	S3	GA6032	6350S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		70	250		INCL	GA8032	8165S	OPP	01	
		B (55)		77	250	49	INCL	GA8032	8165S	OPP	01	
		C (73)		102	250	49	INCL	GA8032	8165S	OPP	01	
		E (86)		122	225	44	INCL	GA8032	8165S	OPP	01	
		J (95)		133	225	44	INCL	GA8032	8165S	OPP	01	
		O (125)		175	200	39	INCL	GA8032	8165S	OPP	01	
		R (137)		192	200	39	INCL	GA8032	8165S	OPP	01	
		S (150)		210	190	37	INCL	GA8032	8165S	OPP	01	
		T (165)		231	175	34	INCL	GA8032	8165S	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa



1007-3A(301121)(301208) **1207-3A(301199)** **1263B(301109)** **PSO120-8LL(301644)** **SPIC.41**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	56	250	49	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
		A (50)	70	250	49	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
		B (55)	77	250	49	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
		C (73)	102	250	49	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
		E (86)	123	225	44	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
		J (95)	134	225	44	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
		O (125)	175	200	39	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		↑ 1B
		R (137)	192	200	39	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
		S (150)	210	190	37	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
		T (165)	231	175	34	INCL	GA8032 CLUTCH SHIFT	8165S	OPP	1		
	4100	B (57)	80	450	87	INCL	(SP2) GA8032	8165S	OPP	1		
		C (70)	98	470	90	INCL	(SP2) GA8032	8165S	OPP	1		
		E (86)	121	470	90	INCL	(SP2) GA8032	8165S	OPP	1		
		J (105)	147	400	77	INCL	(SP2) GA8032	8165S	OPP	1		↑ 1B
	4250	Output 1 C (96)	135	420	80	INCL	(SP2) GA8032		OPP	1		
		Output 2 B (89)	125	420	80	INCL	(SP2) GA8032		OPP	1		
		Output 1 E (112)	158	400	76.5	INCL	(SP2) GA8032		OPP	1		
		Output 2 C (104)	146	420	80	INCL	(SP2) GA8032		OPP	1		
		Output 1 J (132)	185	380	73	INCL	(SP2) GA8032		OPP	1		↑ 1B
		Output 2 E (121)	169	400	76.5	INCL	(SP2) GA8032		OPP	1		
		Output 1 O (168)	236	350	67	INCL	(SP2) GA8032		OPP	1		
		Output 2 J (152)	214	380	73	INCL	(SP2) GA8032		OPP	1		
	6800	Forward (55)	102	150	30	INCL	GA8032	8165S	BOTH	1		
		Reverse (52)	116	150	30	INCL	GA8032	8165S	BOTH	1		↑ 1B
	8000	Forward (40)	58	500	95	INCL	GA8032	8165S	BOTH	1		
		Reverse (50)	69	500	95	INCL	GA8032	8165S	BOTH	1		↑ 1B
	8500	B (57)	53	500	95	INCL	GA8032	8165S	OPP	1		
		C (70)	70	500	95	INCL	GA8032	8165S	OPP	1		
		E (86)	84	480	90	INCL	GA8032	8165S	OPP	1		
		J (105)	104	450	86	INCL	GA8032	8165S	OPP	1		
		O (127)	120	400	76	INCL	GA8032	8165S	OPP	1		
		R (137)	132	360	68	INCL	GA8032	8165S	OPP	1		↑ 1B
		S (150)	145	320	62	INCL	GA8032	8165S	OPP	1		
		T (165)	159	280	54	INCL	GA8032	8165S	OPP	1		

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1211-3A **1211-5A**

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		73	250	49	S9	61500S, 6300S	AD530-1X	ENG	01	
		C (73)		97	250	49	S9	61500S, 6300S	AD530-1X	ENG	01	
		E (86)		115	225	44	S9	61500S, 6300S	AD530-1X	ENG	01	
		J (95)		126	225	44	S9	61500S, 6300S	AD530-1X	ENG	01	
		O (125)		165	200	39	S9	61500S, 6300S	AD530-1X	ENG	01	
		R (137)		181	200	39	S9	61500S, 6300S	AD530-1X	ENG	01	
		S (150)		199	190	37	S9	61500S, 6300S	AD530-1X	ENG	01	
		T (165)		218	175	34	S9	61500S, 6300S	AD530-1X	ENG	01	
3200		Z (40)		53	250	49	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		A (50)		66	250	49	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		B (55)		73	250	49	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		C (73)		97	250	49	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		E (86)		116	225	44	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		J (95)		127	225	44	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		O (125)		165	200	39	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		R (137)		181	200	39	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		S (150)		199	190	37	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
		T (165)		218	175	34	S9	61500S, 6300S CLUTCH SHIFT	AD530-1X	ENG	01	
6000		Forward (73)		97	150	30	S9	61500S, 6300S	AD530-1X	BOTH	01	
		Reverse (83)		110	150	30	S9	61500S, 6300S	AD530-1X	BOTH	01	

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

1211-3A **1211-5A**




8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		66	250		INCL			OPP	01	 ↑ 1B
		B (55)		73	250	49	INCL			OPP	01	
		C (73)		97	250	49	INCL			OPP	01	
		E (86)		115	225	44	INCL			OPP	01	
		J (95)		126	225	44	INCL			OPP	01	
		O (125)		165	200	39	INCL			OPP	01	
		R (137)		181	200	39	INCL			OPP	01	
		S (150)		199	190	37	INCL			OPP	01	
		T (165)		218	175	34	INCL			OPP	01	
	3800	Z (40)		53	250	49	INCL	CLUTCH SHIFT		OPP	01	 ↑ 1B
		A (50)		66	250	49	INCL	CLUTCH SHIFT		OPP	01	
		B (55)		73	250	49	INCL	CLUTCH SHIFT		OPP	01	
		C (73)		97	250	49	INCL	CLUTCH SHIFT		OPP	01	
		E (86)		116	225	44	INCL	CLUTCH SHIFT		OPP	01	
		J (95)		127	225	44	INCL	CLUTCH SHIFT		OPP	01	
		O (125)		165	200	39	INCL	CLUTCH SHIFT		OPP	01	
		R (137)		181	200	39	INCL	CLUTCH SHIFT		OPP	01	
		S (150)		199	190	37	INCL	CLUTCH SHIFT		OPP	01	
		T (165)		218	175	34	INCL	CLUTCH SHIFT		OPP	01	
	6800	Forward (55)		97	150	30	INCL			BOTH	01	 ↑ 1B
		Reverse (52)		110	150	30	INCL			BOTH	01	
	8000	Forward (40)		55	500	95	INCL			BOTH	01	 ↑ 1B
		Reverse (50)		65	500	95	INCL			BOTH	01	
	8500	B (57)		50	500	95	INCL			OPP	01	 ↑ 1B
		C (70)		66	500	95	INCL			OPP	01	
		E (86)		79	480	90	INCL			OPP	01	
		J (105)		98	450	86	INCL			OPP	01	
		O (127)		114	400	76	INCL			OPP	01	
		R (137)		125	360	68	INCL			OPP	01	
		S (150)		137	320	62	INCL			OPP	01	
		T (165)		150	280	54	INCL			OPP	01	

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1214-3A(301130)(301212) **1214-5A(301131)(301213)**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		77	250	49	S5	(SP16)	6300S	OPP	01	
		C (73)		102	250	49	S5	(SP16)	6300S	OPP	01	
		E (86)		122	225	44	S5	(SP16)	6300S	OPP	01	
		J (95)		133	225	44	S5	(SP16)	6300S	OPP	01	
		O (125)		175	200	39	S5	(SP16)	6300S	OPP	01	
		R (137)		192	200	39	S5	(SP16)	6300S	OPP	01	
		S (150)		210	190	37	S5	(SP16)	6300S	OPP	01	
		T (165)		231	175	34	S5	(SP16)	6300S	OPP	01	
3200		Z (40)		56	250	49	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		A (50)		70	250	49	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		B (55)		77	250	49	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		C (73)		102	250	49	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		E (86)		123	225	44	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		J (95)		134	225	44	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		O (125)		175	200	39	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		R (137)		192	200	39	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		S (150)		210	190	37	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
		T (165)		231	175	34	S5	(SP16) CLUTCH SHIFT	6300S	OPP	01	
6000		Forward (73)		102	150	30	S5	(SP16)	6300S	BOTH	01	
		Reverse (83)		116	150	30	S5	(SP16)	6300S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		70	250		INCL	(SP16) GA8093	GA8062	OPP	01	
		B (55)		77	250	49	INCL	(SP16) GA8093	GA8062	OPP	01	
		C (73)		102	250	49	INCL	(SP16) GA8093	GA8062	OPP	01	
		E (86)		122	225	44	INCL	(SP16) GA8093	GA8062	OPP	01	
		J (95)		133	225	44	INCL	(SP16) GA8093	GA8062	OPP	01	
		O (125)		175	200	39	INCL	(SP16) GA8093	GA8062	OPP	01	
		R (137)		192	200	39	INCL	(SP16) GA8093	GA8062	OPP	01	
		S (150)		210	190	37	INCL	(SP16) GA8093	GA8062	OPP	01	
		T (165)		231	175	34	INCL	(SP16) GA8093	GA8062	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

1214-3A(301130)(301212) **1214-5A(301131)(301213)** **SPIC.43**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	56	250	49	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		A (50)	70	250	49	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		B (55)	77	250	49	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		C (73)	102	250	49	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		E (86)	123	225	44	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		J (95)	134	225	44	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		O (125)	175	200	39	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		R (137)	192	200	39	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		S (150)	210	190	37	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
		T (165)	231	175	34	INCL	(SP16) GA8093 CLUTCH SHIFT		GA8062	OPP	01	
	4100	B (57)	80	450	87	INCL	(SP2,16) GA8093		GA8062	OPP	01	
		C (70)	98	470	90	INCL	(SP2,16) GA8093		GA8062	OPP	01	
		E (86)	121	470	90	INCL	(SP2,16) GA8093		GA8062	OPP	01	
		J (105)	147	400	77	INCL	(SP2,16) GA8093		GA8062	OPP	01	
	4250	Output 1 C (96)	135	420	80	INCL	(SP2,16) GA8093			OPP	01	
		Output 2 B (89)	125	420	80	INCL	(SP2,16) GA8093			OPP	01	
		Output 1 E (112)	158	400	76.5	INCL	(SP2,16) GA8093			OPP	01	
		Output 2 C (104)	146	420	80	INCL	(SP2,16) GA8093			OPP	01	
		Output 1 J (132)	185	380	73	INCL	(SP2,16) GA8093			OPP	01	
		Output 2 E (121)	169	400	76.5	INCL	(SP2,16) GA8093			OPP	01	
		Output 1 O (168)	236	350	67	INCL	(SP2,16) GA8093			OPP	01	
		Output 2 J (152)	214	380	73	INCL	(SP2,16) GA8093			OPP	01	
	6800	Forward (55)	102	150	30	INCL	(SP16) GA8093		GA8062	BOTH	01	
		Reverse (52)	116	150	30	INCL	(SP16) GA8093		GA8062	BOTH	01	
	8000	Forward (40)	58	500	95	INCL	(SP16) GA8093		GA8062	BOTH	01	
		Reverse (50)	69	500	95	INCL	(SP16) GA8093		GA8062	BOTH	01	
	8500	B (57)	53	500	95	INCL	(SP16) GA8093		GA8062	OPP	01	
		C (70)	70	500	95	INCL	(SP16) GA8093		GA8062	OPP	01	
		E (86)	84	480	90	INCL	(SP16) GA8093		GA8062	OPP	01	
		J (105)	104	450	86	INCL	(SP16) GA8093		GA8062	OPP	01	
		O (127)	120	400	76	INCL	(SP16) GA8093		GA8062	OPP	01	
		R (137)	132	360	68	INCL	(SP16) GA8093		GA8062	OPP	01	
		S (150)	145	320	62	INCL	(SP16) GA8093		GA8062	OPP	01	
		T (165)	159	280	54	INCL	(SP16) GA8093		GA8062	OPP	01	


↑ 1B


↑ 1B


↑ 1B


↑ 1B


↑ 1B


↑ 1B

FOOT NOTES:



SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

SP16: Speeds shown with transmission in high range. Multiply speeds by .84 for low range.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1263A(301107)
1265A(301108)
1463A(301175)
1463C(301357)
PSO140-6A(301472)
PSO140-6C(301486)
PSO150-16A(301641)
TSPO155-16A

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		77	250	49	S3	(SP16)	6270S	OPP	01	
		C (73)		102	250	49	S3	(SP16)	6270S	OPP	01	
		E (86)		122	225	44	S3	(SP16)	6270S	OPP	01	
		J (95)		133	225	44	S3	(SP16)	6270S	OPP	01	
		O (125)		175	200	39	S3	(SP16)	6270S	OPP	01	
		R (137)		192	200	39	S3	(SP16)	6270S	OPP	01	
		S (150)		210	190	37	S3	(SP16)	6270S	OPP	01	
		T (165)		231	175	34	S3	(SP16)	6270S	OPP	01	
3200		Z (40)		56	250	49	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		A (50)		70	250	49	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		B (55)		77	250	49	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		C (73)		102	250	49	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		E (86)		123	225	44	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		J (95)		134	225	44	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		O (125)		175	200	39	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		R (137)		192	200	39	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		S (150)		210	190	37	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
		T (165)		231	175	34	S3	(SP16) CLUTCH SHIFT	6270S	OPP	01	
6000		Forward (73)		102	150	30	S3	(SP16)	6270S	BOTH	01	
		Reverse (83)		116	150	30	S3	(SP16)	6270S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		70	250		INCL	(SP16) GA8093	GA8062	OPP	01	
		B (55)		77	250	49	INCL	(SP16) GA8093	GA8062	OPP	01	
		C (73)		102	250	49	INCL	(SP16) GA8093	GA8062	OPP	01	
		E (86)		122	225	44	INCL	(SP16) GA8093	GA8062	OPP	01	
		J (95)		133	225	44	INCL	(SP16) GA8093	GA8062	OPP	01	
		O (125)		175	200	39	INCL	(SP16) GA8093	GA8062	OPP	01	
		R (137)		192	200	39	INCL	(SP16) GA8093	GA8062	OPP	01	
		S (150)		210	190	37	INCL	(SP16) GA8093	GA8062	OPP	01	
		T (165)		231	175	34	INCL	(SP16) GA8093	GA8062	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

1263A(301107)
1265A(301108)
1463A(301175)
1463C(301357)
PSO140-6A(301472)
PSO140-6C(301486)
PSO150-16A(301641)
TSPO155-16A

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	56	250	49	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
		A (50)	70	250	49	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
		B (55)	77	250	49	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
		C (73)	102	250	49	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
		E (86)	123	225	44	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		 ↑ 1B
		J (95)	134	225	44	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
		O (125)	175	200	39	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
		R (137)	192	200	39	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
		S (150)	210	190	37	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
		T (165)	231	175	34	INCL	(SP16) GA8093 CLUTCH SHIFT	GA8062	OPP	01		
	4100	B (57)	80	450	87	INCL	(SP2,16) GA8093	GA8062	OPP	01		 ↑ 1B
		C (70)	98	470	90	INCL	(SP2,16) GA8093	GA8062	OPP	01		
		E (86)	121	470	90	INCL	(SP2,16) GA8093	GA8062	OPP	01		
		J (105)	147	400	77	INCL	(SP2,16) GA8093	GA8062	OPP	01		
	4250	Output 1 C (96)	135	420	80	INCL	(SP2,16) GA8093		OPP	01		
		Output 2 B (89)	125	420	80	INCL	(SP2,16) GA8093		OPP	01		
		Output 1 E (112)	158	400	76.5	INCL	(SP2,16) GA8093		OPP	01		
		Output 2 C (104)	146	420	80	INCL	(SP2,16) GA8093		OPP	01		 ↑ 1B
		Output 1 J (132)	185	380	73	INCL	(SP2,16) GA8093		OPP	01		
		Output 2 E (121)	169	400	76.5	INCL	(SP2,16) GA8093		OPP	01		
		Output 1 O (168)	236	350	67	INCL	(SP2,16) GA8093		OPP	01		
		Output 2 J (152)	214	380	73	INCL	(SP2,16) GA8093		OPP	01		
	6800	Forward (55)	102	150	30	INCL	(SP16) GA8093	GA8062	BOTH	01		 ↑ 1B
		Reverse (52)	116	150	30	INCL	(SP16) GA8093	GA8062	BOTH	01		
	8000	Forward (40)	58	500	95	INCL	(SP16) GA8093	GA8062	BOTH	01		 ↑ 1B
		Reverse (50)	69	500	95	INCL	(SP16) GA8093	GA8062	BOTH	01		
	8500	B (57)	53	500	95	INCL	(SP16) GA8093	GA8062	OPP	01		
		C (70)	70	500	95	INCL	(SP16) GA8093	GA8062	OPP	01		
		E (86)	84	480	90	INCL	(SP16) GA8093	GA8062	OPP	01		
		J (105)	104	450	86	INCL	(SP16) GA8093	GA8062	OPP	01		 ↑ 1B
		O (127)	120	400	76	INCL	(SP16) GA8093	GA8062	OPP	01		
		R (137)	132	360	68	INCL	(SP16) GA8093	GA8062	OPP	01		
		S (150)	145	320	62	INCL	(SP16) GA8093	GA8062	OPP	01		
		T (165)	159	280	54	INCL	(SP16) GA8093	GA8062	OPP	01		

FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.



SP16: Speeds shown with transmission in high range. Multiply speeds by .84 for low range.

For complete part numbers, consult the PTO Series section (page 25)

bezaresusa
Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Spicer

TSPO145-14A **TSPO155-14HP**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		80	250	49	S5		6450S	OPP	01	
		C (73)		106	250	49	S5		6450S	OPP	01	
		E (86)		126	225	44	S5		6450S	OPP	01	
		J (95)		138	225	44	S5		6450S	OPP	01	
	1000	O (125)		182	200	39	S5		6450S	OPP	01	
		R (137)		199	200	39	S5		6450S	OPP	01	
		S (150)		218	190	37	S5		6450S	OPP	01	
		T (165)		240	175	34	S5		6450S	OPP	01	
		Z (40)		58	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		A (50)		73	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		B (55)		80	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		C (73)		106	250	49	S5	CLUTCH SHIFT	6450S	OPP	01	
		E (86)		127	225	44	S5	CLUTCH SHIFT	6450S	OPP	01	
	3200	J (95)		139	225	44	S5	CLUTCH SHIFT	6450S	OPP	01	
		O (125)		182	200	39	S5	CLUTCH SHIFT	6450S	OPP	01	
		R (137)		199	200	39	S5	CLUTCH SHIFT	6450S	OPP	01	
		S (150)		218	190	37	S5	CLUTCH SHIFT	6450S	OPP	01	
		T (165)		239	175	34	S5	CLUTCH SHIFT	6450S	OPP	01	
	6000	Forward (73)		106	150	30	S5		6450S	BOTH	01	
		Reverse (83)		121	150	30	S5		6450S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		74	250		S4	GA8062	8248S	OPP	01	
		B (55)		80	250	49	S4	GA8062	8248S	OPP	01	
		C (73)		106	250	49	S4	GA8062	8248S	OPP	01	
		E (86)		126	225	44	S4	GA8062	8248S	OPP	01	
	2000	J (95)		138	225	44	S4	GA8062	8248S	OPP	01	
		O (125)		182	200	39	S4	GA8062	8248S	OPP	01	
		R (137)		199	200	39	S4	GA8062	8248S	OPP	01	
		S (150)		218	190	37	S4	GA8062	8248S	OPP	01	
		T (165)		240	175	34	S4	GA8062	8248S	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

TSPO145-14A **TSPO155-14HP**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
		Z (40)	58	250	49	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
		A (50)	73	250	49	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
		B (55)	80	250	49	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
		C (73)	106	250	49	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
	3800	E (86)	127	225	44	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	 ↑ 1B
		J (95)	139	225	44	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
		O (125)	182	200	39	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
		R (137)	199	200	39	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
		S (150)	218	190	37	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
		T (165)	239	175	34	S4	GA8062 CLUTCH SHIFT		8248S	OPP	01	
		B (57)	83	450	87	S4	(SP2) GA8062		8248S	OPP	01	
	4100	C (70)	102	470	90	S4	(SP2) GA8062		8248S	OPP	01	 ↑ 1B
		E (86)	125	470	90	S4	(SP2) GA8062		8248S	OPP	01	
		J (105)	153	400	77	S4	(SP2) GA8062		8248S	OPP	01	
		Output 1 C (96)	140	420	80	INCL	(SP2) GA8062			OPP	01	
		Output 2 B (89)	130	420	80	INCL	(SP2) GA8062			OPP	01	
		Output 1 E (112)	164	400	76.5	INCL	(SP2) GA8062			OPP	01	
	4250	Output 2 C (104)	151	420	80	INCL	(SP2) GA8062			OPP	01	 ↑ 1B
		Output 1 J (132)	192	380	73	INCL	(SP2) GA8062			OPP	01	
		Output 2 E (121)	176	400	76.5	INCL	(SP2) GA8062			OPP	01	
		Output 1 O (168)	245	350	67	INCL	(SP2) GA8062			OPP	01	
		Output 2 J (152)	221	380	73	INCL	(SP2) GA8062			OPP	01	
	6800	Forward (55)	106	150	30	S4	GA8062		8248S	BOTH	01	 ↑ 1B
		Reverse (52)	121	150	30	S4	GA8062		8248S	BOTH	01	
	8000	Forward (40)	60	500	95	S4	GA8062		8248S	BOTH	01	 ↑ 1B
		Reverse (50)	71	500	95	S4	GA8062		8248S	BOTH	01	
		B (57)	55	500	95	S4	GA8062		8248S	OPP	01	
		C (70)	73	500	95	S4	GA8062		8248S	OPP	01	
		E (86)	87	480	90	S4	GA8062		8248S	OPP	01	
	8500	J (105)	108	450	86	S4	GA8062		8248S	OPP	01	 ↑ 1B
		O (127)	125	400	76	S4	GA8062		8248S	OPP	01	
		R (137)	137	360	68	S4	GA8062		8248S	OPP	01	
		S (150)	150	320	62	S4	GA8062		8248S	OPP	01	
		T (165)	165	280	54	S4	GA8062		8248S	OPP	01	

FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

bezaresusa
Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Spicer

PS86-10V(301587)

SPIC.46

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		68	250	49	INCL			OPP	01	 2R
		C (73)		90	250	49	INCL			OPP	01	
		E (86)		108	225	44	INCL			OPP	01	
		J (95)		118	225	44	INCL			OPP	01	
		O (125)		155	200	39	INCL			OPP	01	
		R (137)		170	200	39	INCL			OPP	01	
		S (150)		186	190	37	INCL			OPP	01	
		T (165)		204	175	34	INCL			OPP	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		62	250		INCL			OPP	01	 1B
		B (55)		68	250	49	INCL			OPP	01	
		C (73)		90	250	49	INCL			OPP	01	
		E (86)		108	225	44	INCL			OPP	01	
		J (95)		118	225	44	INCL			OPP	01	
		O (125)		155	200	39	INCL			OPP	01	
		R (137)		170	200	39	INCL			OPP	01	
		S (150)		186	190	37	INCL			OPP	01	
		T (165)		204	175	34	INCL			OPP	01	
3800		Z (40)		50	250	49	INCL	CLUTCH SHIFT		OPP	01	 1B
		A (50)		62	250	49	INCL	CLUTCH SHIFT		OPP	01	
		B (55)		68	250	49	INCL	CLUTCH SHIFT		OPP	01	
		C (73)		90	250	49	INCL	CLUTCH SHIFT		OPP	01	
		E (86)		108	225	44	INCL	CLUTCH SHIFT		OPP	01	
		J (95)		118	225	44	INCL	CLUTCH SHIFT		OPP	01	
		O (125)		155	200	39	INCL	CLUTCH SHIFT		OPP	01	
		R (137)		169	200	39	INCL	CLUTCH SHIFT		OPP	01	
		S (150)		186	190	37	INCL	CLUTCH SHIFT		OPP	01	
		T (165)		204	175	34	INCL	CLUTCH SHIFT		OPP	01	

CONTINUES →

FOOT NOTES:


SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

PS86-10V(301587)

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	4100	B (57)	71	450	87	INCL	(SP2)			OPP	01	 ↑ 1B
		C (70)	87	470	90	INCL	(SP2)			OPP	01	
		E (86)	106	470	90	INCL	(SP2)			OPP	01	
		J (105)	130	400	77	INCL	(SP2)			OPP	01	
	4250	Output 1 C (96)	119	420	80	INCL	(SP2)			OPP	01	 ↑ 1B
		Output 2 B (89)	110	420	80	INCL	(SP2)			OPP	01	
		Output 1 E (112)	139	400	76.5	INCL	(SP2)			OPP	01	
		Output 2 C (104)	129	420	80	INCL	(SP2)			OPP	01	
		Output 1 J (132)	163	380	73	INCL	(SP2)			OPP	01	
		Output 2 E (121)	150	400	76.5	INCL	(SP2)			OPP	01	
		Output 1 O (168)	208	350	67	INCL	(SP2)			OPP	01	
		Output 2 J (152)	189	380	73	INCL	(SP2)			OPP	01	
	6800	Forward (55)	90	150	30	INCL				BOTH	01	 ↑ 1B
		Reverse (52)	103	150	30	INCL				BOTH	01	
	8000	Forward (40)	51	500	95	INCL				BOTH	01	 ↑ 1B
		Reverse (50)	61	500	95	INCL				BOTH	01	
	8500	B (57)	47	500	95	INCL				OPP	01	 ↑ 1B
		C (70)	62	500	95	INCL				OPP	01	
		E (86)	74	480	90	INCL				OPP	01	
		J (105)	92	450	86	INCL				OPP	01	
		O (127)	106	400	76	INCL				OPP	01	
		R (137)	117	360	68	INCL				OPP	01	
		S (150)	128	320	62	INCL				OPP	01	
		T (165)	140	280	54	INCL				OPP	01	

Spicer TTC


For complete part numbers, consult the PTO Series section (page 25)

Spicer

1010-2A(301111)
1010-4A(301112)

1020-2A(301123)
1020-4A(301124)

1410-2A(301288)(301161)

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1010		B (55)	59	75	250	49	INCL		6140S	OPP	01	
		C (73)	78	99	250	49	INCL		6140S	OPP	01	
		E (86)	93	118	225	44	INCL		6140S	OPP	01	
		J (95)	102	129	225	44	INCL		6140S	OPP	01	
		O (125)	134	170	200	39	INCL		6140S	OPP	01	
		R (137)	147	186	200	39	INCL		6140S	OPP	01	
		S (150)	161	204	190	37	INCL		6140S	OPP	01	
		T (165)	177	224	175	34	INCL		6140S	OPP	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2010		A (50)	43	54			INCL		GA8032	OPP	01	
		B (55)	59	75	250	49	INCL		GA8032	OPP	01	
		C (73)	78	99	250	49	INCL		GA8032	OPP	01	
		E (86)	93	118	225	44	INCL		GA8032	OPP	01	
		J (95)	102	129	225	44	INCL		GA8032	OPP	01	
		O (125)	134	170	200	39	INCL		GA8032	OPP	01	
		R (137)	147	186	200	39	INCL		GA8032	OPP	01	
		S (150)	161	204	190	37	INCL		GA8032	OPP	01	
		T (165)	177	224	175	34	INCL		GA8032	OPP	01	
4110		B (57)	61	77	450	87	INCL	(SP2)	GA8032	OPP	01	
		C (70)	75	95	470	90	INCL	(SP2)	GA8032	OPP	01	
		E (86)	92	117	470	90	INCL	(SP2)	GA8032	OPP	01	
		J (105)	113	143	400	77	INCL	(SP2)	GA8032	OPP	01	

FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

AS125-9A
AS135-9A
AS140-9A
LAS115-9A(301590)
LAS125-9A(301591)
LAS135-9A(301592)
LAS140-9A
LAS145-9A(301593)
LPS125-9A(301547)
(301567)
LPS140-9A(301549)
(301569)
PS125-9A(301431)(301554)
PS140-9A(301495)(301555)
PS95-9A(301500)(301553)

SPIC.48

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		69	250	49	INCL			OPP	01	
		C (73)		92	250	49	INCL			OPP	01	
		E (86)		109	225	44	INCL			OPP	01	
	1000	J (95)		120	225	44	INCL			OPP	01	 1R
		O (125)		157	200	39	INCL			OPP	01	
		R (137)		172	200	39	INCL			OPP	01	
		S (150)		189	190	37	INCL			OPP	01	
		T (165)		208	175	34	INCL			OPP	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		63	250		INCL			OPP	01	
		B (55)		69	250	49	INCL			OPP	01	
		C (73)		92	250	49	INCL			OPP	01	
		E (86)		109	225	44	INCL			OPP	01	
	2000	J (95)		120	225	44	INCL			OPP	01	
		O (125)		157	200	39	INCL			OPP	01	 1B
		R (137)		172	200	39	INCL			OPP	01	
		S (150)		189	190	37	INCL			OPP	01	
		T (165)		208	175	34	INCL			OPP	01	
		Z (40)		50	250	49	INCL	CLUTCH SHIFT		OPP	01	
		A (50)		63	250	49	INCL	CLUTCH SHIFT		OPP	01	
		B (55)		69	250	49	INCL	CLUTCH SHIFT		OPP	01	
		C (73)		92	250	49	INCL	CLUTCH SHIFT		OPP	01	
		E (86)		110	225	44	INCL	CLUTCH SHIFT		OPP	01	
	3800	J (95)		120	225	44	INCL	CLUTCH SHIFT		OPP	01	 1B
		O (125)		157	200	39	INCL	CLUTCH SHIFT		OPP	01	
		R (137)		172	200	39	INCL	CLUTCH SHIFT		OPP	01	
		S (150)		189	190	37	INCL	CLUTCH SHIFT		OPP	01	
		T (165)		207	175	34	INCL	CLUTCH SHIFT		OPP	01	

CONTINUES →

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

AS125-9A
AS135-9A
AS140-9A
LAS115-9A(301590)
LAS125-9A(301591)
LAS135-9A(301592)
LAS140-9A
LAS145-9A(301593)
LPS125-9A(301547)
(301567)
LPS140-9A(301549)
(301569)
PS125-9A(301431)(301554)
PS140-9A(301495)(301555)
PS95-9A(301500)(301553)

SPIC.48

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
					← CONTINUES							
	4100	B (57)	72	450	87	INCL	(SP2)			OPP	01	 ↑ 1B
		C (70)	88	470	90	INCL	(SP2)			OPP	01	
		E (86)	108	470	90	INCL	(SP2)			OPP	01	
		J (105)	132	400	77	INCL	(SP2)			OPP	01	
	4250	Output 1 C (96)	121	420	80	INCL	(SP2)			OPP	01	 ↑ 1B
		Output 2 B (89)	112	420	80	INCL	(SP2)			OPP	01	
		Output 1 E (112)	142	400	76.5	INCL	(SP2)			OPP	01	
		Output 2 C (104)	131	420	80	INCL	(SP2)			OPP	01	
		Output 1 J (132)	166	380	73	INCL	(SP2)			OPP	01	
		Output 2 E (121)	152	400	76.5	INCL	(SP2)			OPP	01	
		Output 1 O (168)	212	350	67	INCL	(SP2)			OPP	01	
		Output 2 J (152)	192	380	73	INCL	(SP2)			OPP	01	
	6800	Forward (55)	92	150	30	INCL				BOTH	01	 ↑ 1B
		Reverse (52)	104	150	30	INCL				BOTH	01	
	8000	Forward (40)	52	500	95	INCL				BOTH	01	 ↑ 1B
		Reverse (50)	62	500	95	INCL				BOTH	01	
	8500	B (57)	48	500	95	INCL				OPP	01	 ↑ 1B
		C (70)	63	500	95	INCL				OPP	01	
		E (86)	75	480	90	INCL				OPP	01	
		J (105)	93	450	86	INCL				OPP	01	
		O (127)	108	400	76	INCL				OPP	01	
		R (137)	118	360	68	INCL				OPP	01	
		S (150)	130	320	62	INCL				OPP	01	
		T (165)	143	280	54	INCL				OPP	01	

FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.


For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

1010-3A(301113)
1010-5A(301114)
1410-3A(301163)
1412-3A(301227)
1414-3A(301243)(301290)
1420-3A(301232)(301239)
1420-3B(301332)
PSO140-12B(301473)
PSO140-14A(301483)
PSO165-12B
PSO85-10LL
PSO85-14-4L

SPIC.49

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)	65	84	250	49	S3	(SP15)	6300S	OPP	01	 1R
		C (73)	86	112	250	49	S3	(SP15)	6300S	OPP	01	
		E (86)	102	133	225	44	S3	(SP15)	6300S	OPP	01	
		J (95)	112	146	225	44	S3	(SP15)	6300S	OPP	01	
		O (125)	148	192	200	39	S3	(SP15)	6300S	OPP	01	
		R (137)	162	210	200	39	S3	(SP15)	6300S	OPP	01	
		S (150)	177	230	190	37	S3	(SP15)	6300S	OPP	01	
		T (165)	195	253	175	34	S3	(SP15)	6300S	OPP	01	
3200		Z (40)	47	61	250	49	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	 1R
		A (50)	59	77	250	49	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
		B (55)	65	84	250	49	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
		C (73)	86	112	250	49	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
		E (86)	103	134	225	44	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
		J (95)	113	147	225	44	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
		O (125)	148	192	200	39	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
		R (137)	162	210	200	39	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
		S (150)	177	230	190	37	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
		T (165)	195	253	175	34	S3	(SP15) CLUTCH SHIFT	6300S	OPP	01	
6000		Forward (73)	86	112	150	30	S3	(SP15)	6300S	BOTH	01	 1R
		Reverse (83)	98	127	150	30	S3	(SP15)	6300S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
2000		A (50)	59	77	250		INCL	(SP15) GA8093	GA8062	OPP	01	 1B
		B (55)	65	84	250	49	INCL	(SP15) GA8093	GA8062	OPP	01	
		C (73)	86	112	250	49	INCL	(SP15) GA8093	GA8062	OPP	01	
		E (86)	102	133	225	44	INCL	(SP15) GA8093	GA8062	OPP	01	
		J (95)	112	146	225	44	INCL	(SP15) GA8093	GA8062	OPP	01	
		O (125)	148	192	200	39	INCL	(SP15) GA8093	GA8062	OPP	01	
		R (137)	162	210	200	39	INCL	(SP15) GA8093	GA8062	OPP	01	
		S (150)	177	230	190	37	INCL	(SP15) GA8093	GA8062	OPP	01	
		T (165)	195	253	175	34	INCL	(SP15) GA8093	GA8062	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1010-3A(301113)
1010-5A(301114)
1410-3A(301163)
1412-3A(301227)
1414-3A(301243)(301290)
1420-3A(301232)(301239)
1420-3B(301332)
PSO140-12B(301473)
PSO140-14A(301483)
PSO165-12B
PSO85-10LL
PSO85-14-4L

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
		Z (40)	47	61	250	49	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
		A (50)	59	77	250	49	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
		B (55)	65	84	250	49	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
		C (73)	86	112	250	49	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
	3800	E (86)	103	134	225	44	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	 ↑ 1B
		J (95)	113	147	225	44	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
		O (125)	148	192	200	39	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
		R (137)	162	210	200	39	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
		S (150)	177	230	190	37	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
		T (165)	195	253	175	34	INCL	(SP15) GA8093 CLUTCH SHIFT	GA8062	OPP	01	
		B (57)	67	87	450	87	INCL	(SP2,15) GA8093	GA8062	OPP	01	 ↑ 1B
	4100	C (70)	82	107	470	90	INCL	(SP2,15) GA8093	GA8062	OPP	01	
		E (86)	102	132	470	90	INCL	(SP2,15) GA8093	GA8062	OPP	01	
		J (105)	124	161	400	77	INCL	(SP2,15) GA8093	GA8062	OPP	01	
		Output 1 C (96)	114	148	420	80	INCL	(SP2,15) GA8093		OPP	01	
		Output 2 B (89)	105	137	420	80	INCL	(SP2,15) GA8093		OPP	01	
		Output 1 E (112)	133	173	400	76.5	INCL	(SP2,15) GA8093		OPP	01	
	4250	Output 2 C (104)	122	159	420	80	INCL	(SP2,15) GA8093		OPP	01	 ↑ 1B
		Output 1 J (132)	155	202	380	73	INCL	(SP2,15) GA8093		OPP	01	
		Output 2 E (121)	142	185	400	76.5	INCL	(SP2,15) GA8093		OPP	01	
		Output 1 O (168)	199	258	350	67	INCL	(SP2,15) GA8093		OPP	01	
		Output 2 J (152)	180	234	380	73	INCL	(SP2,15) GA8093		OPP	01	
	6800	Forward (55)	86	112	150	30	INCL	(SP15) GA8093	GA8062	BOTH	01	 ↑ 1B
		Reverse (52)	98	127	150	30	INCL	(SP15) GA8093	GA8062	BOTH	01	
	8000	Forward (40)	48	63	500	95	INCL	(SP15) GA8093	GA8062	BOTH	01	 ↑ 1B
		Reverse (50)	58	75	500	95	INCL	(SP15) GA8093	GA8062	BOTH	01	
		B (57)	45	58	500	95	INCL	(SP15) GA8093	GA8062	OPP	01	
		C (70)	59	77	500	95	INCL	(SP15) GA8093	GA8062	OPP	01	
		E (86)	71	92	480	90	INCL	(SP15) GA8093	GA8062	OPP	01	
	8500	J (105)	88	114	450	86	INCL	(SP15) GA8093	GA8062	OPP	01	 ↑ 1B
		O (127)	102	132	400	76	INCL	(SP15) GA8093	GA8062	OPP	01	
		R (137)	111	144	360	68	INCL	(SP15) GA8093	GA8062	OPP	01	
		S (150)	122	158	320	62	INCL	(SP15) GA8093	GA8062	OPP	01	
		T (165)	134	174	280	54	INCL	(SP15) GA8093	GA8062	OPP	01	

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

SP15: Speeds shown with transmission in high range. Multiply speeds by .77 for low range.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

ASO56-7A(301452)(301636)
ASO56-7B

ASO66-7A(301452)(301636)
ASO66-7B

ESO65-7A(301452)(301636)
ESO66-7B(301643)(301638)(301742)

SPIC.51

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1010		B (55)		47	250	49	INCL	(SP3,4)		OPP	34	
		C (73)		63	250	49	INCL	(SP3,4)		OPP	34	
		E (86)		75	225	44	INCL	(SP3,4)		OPP	34	
		J (95)		82	225	44	INCL	(SP3,4)		OPP	34	
		O (125)		108	200	39	INCL	(SP3,4)		OPP	34	
		R (137)		118	200	39	INCL	(SP3,4)		OPP	34	
		S (150)		129	190	37	INCL	(SP3,4)		OPP	34	
		T (165)		142	175	34	INCL	(SP3,4)		OPP	34	

FOOT NOTES:

SP3: Check for possible interference with exhaust.

SP4: Possible clearance issue with direct mount pump. May need to use "3" assembly arrangement.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

AS100-10D(301612)
AS125-10D(301613)
AS135-10D(301614)
AS145-10D(301615)
LAS100-10D(301616)
LAS125-10D(301617)
LAS135-10D(301618)
LAS145-10D(301619)
LLAS100-10D
LLAS125-10D
LLAS135-10D
LLAS145-10D
LLPS100-10D
LLPS125-10D
LLPS135-10D
LLPS145-10D(301703)
LPS100-10D(301608)
LPS125-10D(301609)
LPS135-10D(301610)
LPS145-10D(301611)
PS100-10D(301604)
PS125-10D(301605)
PS135-10D(301606)
PS145-10D(301607)

SPIC.52

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		75	250	49	INCL			OPP	01	 2R
		C (73)		100	250	49	INCL			OPP	01	
		E (86)		119	225	44	INCL			OPP	01	
		J (95)		130	225	44	INCL			OPP	01	
		O (125)		171	200	39	INCL			OPP	01	
		R (137)		187	200	39	INCL			OPP	01	
		S (150)		205	190	37	INCL			OPP	01	
		T (165)		225	175	34	INCL			OPP	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		65	250		INCL			OPP	01	 1B
		B (55)		75	250	49	INCL			OPP	01	
		C (73)		100	250	49	INCL			OPP	01	
		E (86)		119	225	44	INCL			OPP	01	
		J (95)		130	225	44	INCL			OPP	01	
		O (125)		171	200	39	INCL			OPP	01	
		R (137)		187	200	39	INCL			OPP	01	
		S (150)		205	190	37	INCL			OPP	01	
		T (165)		225	175	34	INCL			OPP	01	
	3800	Z (40)		55	250	49	INCL	CLUTCH SHIFT		OPP	01	 1B
		A (50)		68	250	49	INCL	CLUTCH SHIFT		OPP	01	
		B (55)		75	250	49	INCL	CLUTCH SHIFT		OPP	01	
		C (73)		100	250	49	INCL	CLUTCH SHIFT		OPP	01	
		E (86)		119	225	44	INCL	CLUTCH SHIFT		OPP	01	
		J (95)		130	225	44	INCL	CLUTCH SHIFT		OPP	01	
		O (125)		171	200	39	INCL	CLUTCH SHIFT		OPP	01	
		R (137)		187	200	39	INCL	CLUTCH SHIFT		OPP	01	
		S (150)		205	190	37	INCL	CLUTCH SHIFT		OPP	01	
		T (165)		225	175	34	INCL	CLUTCH SHIFT		OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

SPIC.52

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		← CONTINUES										
	4100	B (57)	78	450	87	INCL	(SP2)			OPP	01	 ↑ 1B
		C (70)	96	470	90	INCL	(SP2)			OPP	01	
		E (86)	117	470	90	INCL	(SP2)			OPP	01	
		J (105)	143	400	77	INCL	(SP2)			OPP	01	
	4250	Output 1 C (96)	131	420	80	INCL	(SP2)			OPP	01	 ↑ 1B
		Output 2 B (89)	122	420	80	INCL	(SP2)			OPP	01	
		Output 1 E (112)	153	400	76.5	INCL	(SP2)			OPP	01	
		Output 2 C (104)	142	420	80	INCL	(SP2)			OPP	01	
		Output 1 J (132)	180	380	73	INCL	(SP2)			OPP	01	
		Output 2 E (121)	165	400	76.5	INCL	(SP2)			OPP	01	
		Output 1 O (168)	230	350	67	INCL	(SP2)			OPP	01	
		Output 2 J (152)	208	380	73	INCL	(SP2)			OPP	01	
	6800	Forward (55)	100	150	30	INCL				BOTH	01	 ↑ 1B
		Reverse (52)	113	150	30	INCL				BOTH	01	
	8000	Forward (40)	56	500	95	INCL				BOTH	01	 ↑ 1B
		Reverse (50)	67	500	95	INCL				BOTH	01	
	8500	B (57)	52	500	95	INCL				OPP	01	 ↑ 1B
		C (70)	68	500	95	INCL				OPP	01	
		E (86)	82	480	90	INCL				OPP	01	
		J (105)	101	450	86	INCL				OPP	01	
		O (127)	117	400	76	INCL				OPP	01	
		R (137)	129	360	68	INCL				OPP	01	
		S (150)	141	320	62	INCL				OPP	01	
		T (165)	155	280	54	INCL				OPP	01	

FOOT NOTES:


SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

CM-6252A(301257)(301084).

SPIC.53



6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		68	250	49	S3		6200S	OPP	05	3L 
		C (73)		90	250	49	S3		6200S	OPP	05	
		E (86)		108	225	44	S3		6200S	OPP	05	
		J (95)		118	225	44	S3		6200S	OPP	05	
		O (125)		155	200	39	S3		6200S	OPP	05	
		R (137)		170	200	39	S3		6200S	OPP	05	
		S (150)		186	190	37	S3		6200S	OPP	05	
		T (165)		204	175	34	S3		6200S	OPP	05	
3200		Z (40)		50	250	49	S3	CLUTCH SHIFT	6200S	OPP	05	3L 
		A (50)		62	250	49	S3	CLUTCH SHIFT	6200S	OPP	05	
		B (55)		68	250	49	S3	CLUTCH SHIFT	6200S	OPP	05	
		C (73)		90	250	49	S3	CLUTCH SHIFT	6200S	OPP	05	
		E (86)		108	225	44	S3	CLUTCH SHIFT	6200S	OPP	05	
		J (95)		118	225	44	S3	CLUTCH SHIFT	6200S	OPP	05	
		O (125)		155	200	39	S3	CLUTCH SHIFT	6200S	OPP	05	
		R (137)		170	200	39	S3	CLUTCH SHIFT	6200S	OPP	05	
		S (150)		186	190	37	S3	CLUTCH SHIFT	6200S	OPP	05	
		T (165)		204	175	34	S3	CLUTCH SHIFT	6200S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-6252A(301257)(301084).


SPIC.53

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		S6	8600S	8248S	OPP	05	
		B (55)		68	250	49	S6	8600S	8248S	OPP	05	
		C (73)		90	250	49	S6	8600S	8248S	OPP	05	
		E (86)		108	225	44	S6	8600S	8248S	OPP	05	
		J (95)		118	225	44	S6	8600S	8248S	OPP	05	 1R
		O (125)		155	200	39	S6	8600S	8248S	OPP	05	
		R (137)		170	200	39	S6	8600S	8248S	OPP	05	
		S (150)		186	190	37	S6	8600S	8248S	OPP	05	
		T (165)		204	175	34	S6	8600S	8248S	OPP	05	
	3800	Z (40)		47	250	49	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
		A (50)		59	250	49	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
		B (55)		65	250	49	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
		C (73)		86	250	49	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
		E (86)		103	225	44	S6	8600S CLUTCH SHIFT	8248S	OPP	05	 1R
		J (95)		113	225	44	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
		O (125)		148	200	39	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
		R (137)		162	200	39	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
		S (150)		177	190	37	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
		T (165)		195	175	34	S6	8600S CLUTCH SHIFT	8248S	OPP	05	
	6800	Forward (55)		86	150	30	S6	8600S	8248S	BOTH	05	 1R
		Reverse (52)		98	150	30	S6	8600S	8248S	BOTH	05	
	8000	Forward (40)		49	500	95	S6	8600S	8248S	BOTH	05	 1R
		Reverse (50)		58	500	95	S6	8600S	8248S	BOTH	05	
	8500	B (57)		45	500	95	S6	8600S	8248S	OPP	05	
		C (70)		59	500	95	S6	8600S	8248S	OPP	05	
		E (86)		71	480	90	S6	8600S	8248S	OPP	05	
		J (105)		88	450	86	S6	8600S	8248S	OPP	05	 1R
		O (127)		102	400	76	S6	8600S	8248S	OPP	05	
		R (137)		111	360	68	S6	8600S	8248S	OPP	05	
		S (150)		122	320	62	S6	8600S	8248S	OPP	05	
		T (165)		134	280	54	S6	8600S	8248S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

CM-6253A(301259)(301086)

SPIC.54




6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		77	250	49	S5		6700S	OPP	05	3L 
		C (73)		102	250	49	S5		6700S	OPP	05	
		E (86)		122	225	44	S5		6700S	OPP	05	
		J (95)		133	225	44	S5		6700S	OPP	05	
		O (125)		175	200	39	S5		6700S	OPP	05	
		R (137)		191	200	39	S5		6700S	OPP	05	
		S (150)		210	190	37	S5		6700S	OPP	05	
		T (165)		231	175	34	S5		6700S	OPP	05	
3200		Z (40)		56	250	49	S5	CLUTCH SHIFT	6700S	OPP	05	3L 
		A (50)		70	250	49	S5	CLUTCH SHIFT	6700S	OPP	05	
		B (55)		77	250	49	S5	CLUTCH SHIFT	6700S	OPP	05	
		C (73)		102	250	49	S5	CLUTCH SHIFT	6700S	OPP	05	
		E (86)		122	225	44	S5	CLUTCH SHIFT	6700S	OPP	05	
		J (95)		134	225	44	S5	CLUTCH SHIFT	6700S	OPP	05	
		O (125)		175	200	39	S5	CLUTCH SHIFT	6700S	OPP	05	
		R (137)		191	200	39	S5	CLUTCH SHIFT	6700S	OPP	05	
		S (150)		210	190	37	S5	CLUTCH SHIFT	6700S	OPP	05	
		T (165)		230	175	34	S5	CLUTCH SHIFT	6700S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-6253A(301259)(301086)

SPIC.54

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		S8	81005S	8165S	OPP	05	 1R
		B (55)		77	250	49	S8	81005S	8165S	OPP	05	
		C (73)		102	250	49	S8	81005S	8165S	OPP	05	
		E (86)		122	225	44	S8	81005S	8165S	OPP	05	
		J (95)		133	225	44	S8	81005S	8165S	OPP	05	
		O (125)		175	200	39	S8	81005S	8165S	OPP	05	
		R (137)		191	200	39	S8	81005S	8165S	OPP	05	
		S (150)		210	190	37	S8	81005S	8165S	OPP	05	
		T (165)		231	175	34	S8	81005S	8165S	OPP	05	
	3800	Z (40)		53	250	49	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
		A (50)		67	250	49	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
		B (55)		73	250	49	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
		C (73)		97	250	49	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
		E (86)		117	225	44	S8	81005S CLUTCH SHIFT	8165S	OPP	05	 1R
		J (95)		128	225	44	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
		O (125)		167	200	39	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
		R (137)		183	200	39	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
		S (150)		200	190	37	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
		T (165)		220	175	34	S8	81005S CLUTCH SHIFT	8165S	OPP	05	
	6800	Forward (55)		97	150	30	S8	81005S	8165S	BOTH	05	 1R
		Reverse (52)		111	150	30	S8	81005S	8165S	BOTH	05	
	8000	Forward (40)		55	500	95	S8	81005S	8165S	BOTH	05	 1R
		Reverse (50)		65	500	95	S8	81005S	8165S	BOTH	05	
	8500	B (57)		50	500	95	S8	81005S	8165S	OPP	05	
		C (70)		67	500	95	S8	81005S	8165S	OPP	05	
		E (86)		80	480	90	S8	81005S	8165S	OPP	05	
		J (105)		99	450	86	S8	81005S	8165S	OPP	05	 1R
		O (127)		115	400	76	S8	81005S	8165S	OPP	05	
		R (137)		126	360	68	S8	81005S	8165S	OPP	05	
		S (150)		138	320	62	S8	81005S	8165S	OPP	05	
		T (165)		151	280	54	S8	81005S	8165S	OPP	05	




Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

TSP120-12A

SPIC.55

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)	67	86	250	49	INCL	(SP18)	6187S	OPP	01	
		C (73)	88	114	250	49	INCL	(SP18)	6187S	OPP	01	
		E (86)	105	135	225	44	INCL	(SP18)	6187S	OPP	01	
		J (95)	115	148	225	44	INCL	(SP18)	6187S	OPP	01	
		O (125)	150	194	200	39	INCL	(SP18)	6187S	OPP	01	
		R (137)	165	213	200	39	INCL	(SP18)	6187S	OPP	01	
		S (150)	181	233	190	37	INCL	(SP18)	6187S	OPP	01	
		T (165)	199	257	175	34	INCL	(SP18)	6187S	OPP	01	
3200		Z (40)	48	62	250	49	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		A (50)	60	78	250	49	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		B (55)	67	86	250	49	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		C (73)	88	114	250	49	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		E (86)	105	136	225	44	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		J (95)	115	149	225	44	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		O (125)	150	194	200	39	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		R (137)	165	213	200	39	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		S (150)	181	233	190	37	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
		T (165)	198	256	175	34	INCL	(SP18) CLUTCH SHIFT	6187S	OPP	01	
6000		Forward (73)	88	114	150	30	INCL	(SP18)	6187S	BOTH	01	
		Reverse (83)	100	129	150	30	INCL	(SP18)	6187S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)	50	64	250		INCL	(SP18)	GA8062	OPP	01	
		B (55)	67	86	250	49	INCL	(SP18)	GA8062	OPP	01	
		C (73)	88	114	250	49	INCL	(SP18)	GA8062	OPP	01	
		E (86)	105	135	225	44	INCL	(SP18)	GA8062	OPP	01	
		J (95)	115	148	225	44	INCL	(SP18)	GA8062	OPP	01	
		O (125)	150	194	200	39	INCL	(SP18)	GA8062	OPP	01	
		R (137)	165	213	200	39	INCL	(SP18)	GA8062	OPP	01	
		S (150)	181	233	190	37	INCL	(SP18)	GA8062	OPP	01	
		T (165)	199	257	175	34	INCL	(SP18)	GA8062	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

TSP120-12A

SPIC.55

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
		Z (40)	48	62	250	49	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
		A (50)	60	78	250	49	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
		B (55)	67	86	250	49	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
		C (73)	88	114	250	49	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
	3800	E (86)	105	136	225	44	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	 ↑ 1B
		J (95)	115	149	225	44	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
		O (125)	150	194	200	39	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
		R (137)	165	213	200	39	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
		S (150)	181	233	190	37	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
		T (165)	198	256	175	34	INCL	(SP18) CLUTCH SHIFT	GA8062	OPP	01	
		B (57)	69	89	450	87	INCL	(SP2,18)	GA8062	OPP	01	
	4100	C (70)	84	109	470	90	INCL	(SP2,18)	GA8062	OPP	01	 ↑ 1B
		E (86)	104	134	470	90	INCL	(SP2,18)	GA8062	OPP	01	
		J (105)	126	163	400	77	INCL	(SP2,18)	GA8062	OPP	01	
		Output 1 C (96)	116	150	420	80	INCL	(SP2,18)		OPP	01	
		Output 2 B (89)	108	139	420	80	INCL	(SP2,18)		OPP	01	
		Output 1 E (112)	136	175	400	76.5	INCL	(SP2,18)		OPP	01	
	4250	Output 2 C (104)	126	162	420	80	INCL	(SP2,18)		OPP	01	 ↑ 1B
		Output 1 J (132)	159	205	380	73	INCL	(SP2,18)		OPP	01	
		Output 2 E (121)	146	188	400	76.5	INCL	(SP2,18)		OPP	01	
		Output 1 O (168)	203	262	350	67	INCL	(SP2,18)		OPP	01	
		Output 2 J (152)	184	237	380	73	INCL	(SP2,18)		OPP	01	
	6800	Forward (55)	88	114	150	30	INCL	(SP18)	GA8062	BOTH	01	 ↑ 1B
		Reverse (52)	100	129	150	30	INCL	(SP18)	GA8062	BOTH	01	
	8000	Forward (40)	50	64	500	95	INCL	(SP18)	GA8062	BOTH	01	 ↑ 1B
		Reverse (50)	59	76	500	95	INCL	(SP18)	GA8062	BOTH	01	
		B (57)	46	59	500	95	INCL	(SP18)	GA8062	OPP	01	
		C (70)	60	78	500	95	INCL	(SP18)	GA8062	OPP	01	
		E (86)	72	93	480	90	INCL	(SP18)	GA8062	OPP	01	
	8500	J (105)	89	115	450	86	INCL	(SP18)	GA8062	OPP	01	 ↑ 1B
		O (127)	104	134	400	76	INCL	(SP18)	GA8062	OPP	01	
		R (137)	114	147	360	68	INCL	(SP18)	GA8062	OPP	01	
		S (150)	124	160	320	62	INCL	(SP18)	GA8062	OPP	01	
		T (165)	136	176	280	54	INCL	(SP18)	GA8062	OPP	01	

FOOT NOTES:




SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

SP18: Speeds shown with transmission in high range. Multiply speeds by .78 for low range.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1253A(301096) **1255A(301097)** **1453A(301185)** **SPIC.56**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		87	250	49	INCL		GA6093	OPP	01	
		C (73)		115	250	49	INCL		GA6093	OPP	01	
		E (86)		137	225	44	INCL		GA6093	OPP	01	
		J (95)		150	225	44	INCL		GA6093	OPP	01	
		O (125)		197	200	39	INCL		GA6093	OPP	01	
		R (137)		216	200	39	INCL		GA6093	OPP	01	
		S (150)		236	190	37	INCL		GA6093	OPP	01	
		T (165)		260	175	34	INCL		GA6093	OPP	01	
3200		Z (40)		63	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		A (50)		79	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		B (55)		87	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		C (73)		115	250	49	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		E (86)		138	225	44	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		J (95)		151	225	44	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		O (125)		197	200	39	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		R (137)		216	200	39	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		S (150)		236	190	37	INCL	CLUTCH SHIFT	GA6093	OPP	01	
		T (165)		260	175	34	INCL	CLUTCH SHIFT	GA6093	OPP	01	
6000		Forward (73)		115	150	30	INCL		GA6093	BOTH	01	
		Reverse (83)		131	150	30	INCL		GA6093	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
2000		A (50)		79	250		INCL			OPP	01	
		B (55)		87	250	49	INCL			OPP	01	
		C (73)		115	250	49	INCL			OPP	01	
		E (86)		137	225	44	INCL			OPP	01	
		J (95)		150	225	44	INCL			OPP	01	
		O (125)		197	200	39	INCL			OPP	01	
		R (137)		216	200	39	INCL			OPP	01	
		S (150)		236	190	37	INCL			OPP	01	
		T (165)		260	175	34	INCL			OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

1253A(301096) **1255A(301097)** **1453A(301185)** **SPIC.56**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
		Z (40)	63	250	49	INCL	CLUTCH SHIFT			OPP	01	
		A (50)	79	250	49	INCL	CLUTCH SHIFT			OPP	01	
		B (55)	87	250	49	INCL	CLUTCH SHIFT			OPP	01	
		C (73)	115	250	49	INCL	CLUTCH SHIFT			OPP	01	
	3800	E (86)	138	225	44	INCL	CLUTCH SHIFT			OPP	01	 ↑ 1B
		J (95)	151	225	44	INCL	CLUTCH SHIFT			OPP	01	
		O (125)	197	200	39	INCL	CLUTCH SHIFT			OPP	01	
		R (137)	216	200	39	INCL	CLUTCH SHIFT			OPP	01	
		S (150)	236	190	37	INCL	CLUTCH SHIFT			OPP	01	
		T (165)	260	175	34	INCL	CLUTCH SHIFT			OPP	01	
		B (57)	90	450	87	INCL	(SP2)			OPP	01	
	4100	C (70)	110	470	90	INCL	(SP2)			OPP	01	 ↑ 1B
		E (86)	136	470	90	INCL	(SP2)			OPP	01	
		J (105)	166	400	77	INCL	(SP2)			OPP	01	
		Output 1 C (96)	152	420	80	INCL	(SP2)			OPP	01	
		Output 2 B (89)	141	420	80	INCL	(SP2)			OPP	01	
		Output 1 E (112)	177	400	76.5	INCL	(SP2)			OPP	01	
	4250	Output 2 C (104)	164	420	80	INCL	(SP2)			OPP	01	 ↑ 1B
		Output 1 J (132)	208	380	73	INCL	(SP2)			OPP	01	
		Output 2 E (121)	190	400	76.5	INCL	(SP2)			OPP	01	
		Output 1 O (168)	265	350	67	INCL	(SP2)			OPP	01	
		Output 2 J (152)	240	380	73	INCL	(SP2)			OPP	01	
	6800	Forward (55)	115	150	30	INCL				BOTH	01	 ↑ 1B
		Reverse (52)	131	150	30	INCL				BOTH	01	
	8000	Forward (40)	65	500	95	INCL				BOTH	01	 ↑ 1B
		Reverse (50)	77	500	95	INCL				BOTH	01	
		B (57)	60	500	95	INCL				OPP	01	
		C (70)	79	500	95	INCL				OPP	01	
		E (86)	94	480	90	INCL				OPP	01	
	8500	J (105)	117	450	86	INCL				OPP	01	 ↑ 1B
		O (127)	135	400	76	INCL				OPP	01	
		R (137)	148	360	68	INCL				OPP	01	
		S (150)	163	320	62	INCL				OPP	01	
		T (165)	179	280	54	INCL				OPP	01	




FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

1253B(301098) **1255B(301099)** **1453B(301187)** **SPIC.57**

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		94	250	49	S5		6350S	OPP	01	
		C (73)		124	250	49	S5		6350S	OPP	01	
		E (86)		148	225	44	S5		6350S	OPP	01	
		J (95)		162	225	44	S5		6350S	OPP	01	
		O (125)		213	200	39	S5		6350S	OPP	01	
		R (137)		233	200	39	S5		6350S	OPP	01	
		S (150)		255	190	37	S5		6350S	OPP	01	
		T (165)		281	175	34	S5		6350S	OPP	01	
	3200	Z (40)		68	250	49	S5	CLUTCH SHIFT	6350S	OPP	01	
		A (50)		85	250	49	S5	CLUTCH SHIFT	6350S	OPP	01	
		B (55)		94	250	49	S5	CLUTCH SHIFT	6350S	OPP	01	
		C (73)		124	250	49	S5	CLUTCH SHIFT	6350S	OPP	01	
		E (86)		149	225	44	S5	CLUTCH SHIFT	6350S	OPP	01	
		J (95)		163	225	44	S5	CLUTCH SHIFT	6350S	OPP	01	
		O (125)		213	200	39	S5	CLUTCH SHIFT	6350S	OPP	01	
		R (137)		233	200	39	S5	CLUTCH SHIFT	6350S	OPP	01	
		S (150)		255	190	37	S5	CLUTCH SHIFT	6350S	OPP	01	
		T (165)		280	175	34	S5	CLUTCH SHIFT	6350S	OPP	01	
	6000	Forward (73)		124	150	30	S5		6350S	BOTH	01	
		Reverse (83)		141	150	30	S5		6350S	BOTH	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		85	250		INCL	GA8032	8165S	OPP	01	
		B (55)		94	250	49	INCL	GA8032	8165S	OPP	01	
		C (73)		124	250	49	INCL	GA8032	8165S	OPP	01	
		E (86)		148	225	44	INCL	GA8032	8165S	OPP	01	
		J (95)		162	225	44	INCL	GA8032	8165S	OPP	01	
		O (125)		213	200	39	INCL	GA8032	8165S	OPP	01	
		R (137)		233	200	39	INCL	GA8032	8165S	OPP	01	
		S (150)		255	190	37	INCL	GA8032	8165S	OPP	01	
		T (165)		281	175	34	INCL	GA8032	8165S	OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

1253B(301098) **1255B(301099)** **1453B(301187)** **SPIC.57**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	68	250	49	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		A (50)	85	250	49	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		B (55)	94	250	49	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		C (73)	124	250	49	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		E (86)	149	225	44	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		J (95)	163	225	44	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		O (125)	213	200	39	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		R (137)	233	200	39	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		S (150)	255	190	37	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
		T (165)	280	175	34	INCL	GA8032 CLUTCH SHIFT		8165S	OPP	01	
	4100	B (57)	97	450	87	INCL	(SP2) GA8032		8165S	OPP	01	
		C (70)	119	470	90	INCL	(SP2) GA8032		8165S	OPP	01	
		E (86)	146	470	90	INCL	(SP2) GA8032		8165S	OPP	01	
		J (105)	179	400	77	INCL	(SP2) GA8032		8165S	OPP	01	
	4250	Output 1 C (96)	163	420	80	INCL	(SP2) GA8032			OPP	01	
		Output 2 B (89)	152	420	80	INCL	(SP2) GA8032			OPP	01	
		Output 1 E (112)	191	400	76.5	INCL	(SP2) GA8032			OPP	01	
		Output 2 C (104)	177	420	80	INCL	(SP2) GA8032			OPP	01	
		Output 1 J (132)	224	380	73	INCL	(SP2) GA8032			OPP	01	
		Output 2 E (121)	205	400	76.5	INCL	(SP2) GA8032			OPP	01	
		Output 1 O (168)	286	350	67	INCL	(SP2) GA8032			OPP	01	
		Output 2 J (152)	259	380	73	INCL	(SP2) GA8032			OPP	01	
	6800	Forward (55)	124	150	30	INCL	GA8032		8165S	BOTH	01	
		Reverse (52)	141	150	30	INCL	GA8032		8165S	BOTH	01	
	8000	Forward (40)	70	500	95	INCL	GA8032		8165S	BOTH	01	
		Reverse (50)	83	500	95	INCL	GA8032		8165S	BOTH	01	
	8500	B (57)	64	500	95	INCL	GA8032		8165S	OPP	01	
		C (70)	85	500	95	INCL	GA8032		8165S	OPP	01	
		E (86)	102	480	90	INCL	GA8032		8165S	OPP	01	
		J (105)	126	450	86	INCL	GA8032		8165S	OPP	01	
		O (127)	146	400	76	INCL	GA8032		8165S	OPP	01	
		R (137)	160	360	68	INCL	GA8032		8165S	OPP	01	
		S (150)	175	320	62	INCL	GA8032		8165S	OPP	01	
		T (165)	193	280	54	INCL	GA8032		8165S	OPP	01	


↑ 1B


↑ 1B


↑ 1B


↑ 1B


↑ 1B


FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

6852 **6853B** **SPIC.59**




6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1000		B (55)		39	250	49	INCL			OPP	03	3L 
		C (73)		52	250	49	INCL			OPP	03	
		E (86)		62	225	44	INCL			OPP	03	
		J (95)		68	225	44	INCL			OPP	03	
		O (125)		89	200	39	INCL			OPP	03	
		R (137)		98	200	39	INCL			OPP	03	
		S (150)		107	190	37	INCL			OPP	03	
		T (165)		118	175	34	INCL			OPP	03	
3200		Z (40)		29	250	49	INCL	CLUTCH SHIFT		OPP	03	3L 
		A (50)		36	250	49	INCL	CLUTCH SHIFT		OPP	03	
		B (55)		39	250	49	INCL	CLUTCH SHIFT		OPP	03	
		C (73)		52	250	49	INCL	CLUTCH SHIFT		OPP	03	
		E (86)		63	225	44	INCL	CLUTCH SHIFT		OPP	03	
		J (95)		68	225	44	INCL	CLUTCH SHIFT		OPP	03	
		O (125)		89	200	39	INCL	CLUTCH SHIFT		OPP	03	
		R (137)		98	200	39	INCL	CLUTCH SHIFT		OPP	03	
		S (150)		107	190	37	INCL	CLUTCH SHIFT		OPP	03	
		T (165)		118	175	34	INCL	CLUTCH SHIFT		OPP	03	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

CM-6252B(301258)(301085) **(301417)**


SPIC.60

8 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
2000		A (50)			250		S4		8295S	OPP	05	 1R
		B (55)		69	250	49	S4		8295S	OPP	05	
		C (73)		91	250	49	S4		8295S	OPP	05	
		E (86)		109	225	44	S4		8295S	OPP	05	
		J (95)		119	225	44	S4		8295S	OPP	05	
		O (125)		156	200	39	S4		8295S	OPP	05	
		R (137)		171	200	39	S4		8295S	OPP	05	
		S (150)		188	190	37	S4		8295S	OPP	05	
		T (165)		206	175	34	S4		8295S	OPP	05	
3800		Z (40)		48	250	49	S4	CLUTCH SHIFT	8295S	OPP	05	 1R
		A (50)		60	250	49	S4	CLUTCH SHIFT	8295S	OPP	05	
		B (55)		66	250	49	S4	CLUTCH SHIFT	8295S	OPP	05	
		C (73)		87	250	49	S4	CLUTCH SHIFT	8295S	OPP	05	
		E (86)		104	225	44	S4	CLUTCH SHIFT	8295S	OPP	05	
		J (95)		114	225	44	S4	CLUTCH SHIFT	8295S	OPP	05	
		O (125)		149	200	39	S4	CLUTCH SHIFT	8295S	OPP	05	
		R (137)		163	200	39	S4	CLUTCH SHIFT	8295S	OPP	05	
		S (150)		179	190	37	S4	CLUTCH SHIFT	8295S	OPP	05	
		T (165)		197	175	34	S4	CLUTCH SHIFT	8295S	OPP	05	
6800		Forward (55)		87	150	30	S4		8295S	BOTH	05	 1R
		Reverse (52)		99	150	30	S4		8295S	BOTH	05	
8000		Forward (40)		49	500	95	S4		8295S	BOTH	05	 1R
		Reverse (50)		59	500	95	S4		8295S	BOTH	05	
8500		B (57)		45	500	95	S4		8295S	OPP	05	 1R
		C (70)		60	500	95	S4		8295S	OPP	05	
		E (86)		71	480	90	S4		8295S	OPP	05	
		J (105)		89	450	86	S4		8295S	OPP	05	
		O (127)		103	400	76	S4		8295S	OPP	05	
		R (137)		112	360	68	S4		8295S	OPP	05	
		S (150)		123	320	62	S4		8295S	OPP	05	
		T (165)		135	280	54	S4		8295S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

Spicer






CM-6253B(301260)(301087)(301418) **ES72-5B(301637)** **SPIC.61**

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)		90	250	49	S5		6800S	OPP	05	3L 
		C (73)		120	250	49	S5		6800S	OPP	05	
		E (86)		143	225	44	S5		6800S	OPP	05	
		J (95)		156	225	44	S5		6800S	OPP	05	
		O (125)		205	200	39	S5		6800S	OPP	05	
		R (137)		225	200	39	S5		6800S	OPP	05	
		S (150)		246	190	37	S5		6800S	OPP	05	
		T (165)		271	175	34	S5		6800S	OPP	05	
3200		Z (40)		66	250	49	S5	CLUTCH SHIFT	6800S	OPP	05	3L 
		A (50)		82	250	49	S5	CLUTCH SHIFT	6800S	OPP	05	
		B (55)		90	250	49	S5	CLUTCH SHIFT	6800S	OPP	05	
		C (73)		120	250	49	S5	CLUTCH SHIFT	6800S	OPP	05	
		E (86)		144	225	44	S5	CLUTCH SHIFT	6800S	OPP	05	
		J (95)		157	225	44	S5	CLUTCH SHIFT	6800S	OPP	05	
		O (125)		205	200	39	S5	CLUTCH SHIFT	6800S	OPP	05	
		R (137)		225	200	39	S5	CLUTCH SHIFT	6800S	OPP	05	
		S (150)		246	190	37	S5	CLUTCH SHIFT	6800S	OPP	05	
		T (165)		271	175	34	S5	CLUTCH SHIFT	6800S	OPP	05	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com


CM-6253B(301260)(301087)(301418) **ES72-5B(301637)** **SPIC.61**

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		S8	GA8093	81200S	OPP	05	 1R
		B (55)		90	250	49	S8	GA8093	81200S	OPP	05	
		C (73)		120	250	49	S8	GA8093	81200S	OPP	05	
		E (86)		143	225	44	S8	GA8093	81200S	OPP	05	
		J (95)		156	225	44	S8	GA8093	81200S	OPP	05	
		O (125)		205	200	39	S8	GA8093	81200S	OPP	05	
		R (137)		225	200	39	S8	GA8093	81200S	OPP	05	
		S (150)		246	190	37	S8	GA8093	81200S	OPP	05	
		T (165)		271	175	34	S8	GA8093	81200S	OPP	05	
	3800	Z (40)		63	250	49	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	 1R
		A (50)		78	250	49	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
		B (55)		86	250	49	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
		C (73)		114	250	49	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
		E (86)		137	225	44	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
		J (95)		150	225	44	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
		O (125)		196	200	39	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
		R (137)		215	200	39	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
		S (150)		235	190	37	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
		T (165)		258	175	34	S8	GA8093 CLUTCH SHIFT	81200S	OPP	05	
	6800	Forward (55)		114	150	30	S8	GA8093	81200S	BOTH	05	 1R
		Reverse (52)		130	150	30	S8	GA8093	81200S	BOTH	05	
	8000	Forward (40)		65	500	95	S8	GA8093	81200S	BOTH	05	 1R
		Reverse (50)		77	500	95	S8	GA8093	81200S	BOTH	05	
	8500	B (57)		59	500	95	S8	GA8093	81200S	OPP	05	 1R
		C (70)		79	500	95	S8	GA8093	81200S	OPP	05	
		E (86)		94	480	90	S8	GA8093	81200S	OPP	05	
		J (105)		116	450	86	S8	GA8093	81200S	OPP	05	
		O (127)		135	400	76	S8	GA8093	81200S	OPP	05	
		R (137)		148	360	68	S8	GA8093	81200S	OPP	05	
		S (150)		162	320	62	S8	GA8093	81200S	OPP	05	
		T (165)		178	280	54	S8	GA8093	81200S	OPP	05	

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

1010-3B(301115) **1020-3A(301125)** **1020-5A(301126)** **1410-3B(301165)** **SPIC.62**

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1010		B (55)	75	96	250	49	INCL	(SP20)	6140S	OPP	01	
		C (73)	99	127	250	49	INCL	(SP20)	6140S	OPP	01	
		E (86)	119	152	225	44	INCL	(SP20)	6140S	OPP	01	
		J (95)	130	166	225	44	INCL	(SP20)	6140S	OPP	01	
		O (125)	170	218	200	39	INCL	(SP20)	6140S	OPP	01	
		R (137)	187	239	200	39	INCL	(SP20)	6140S	OPP	01	
		S (150)	205	262	190	37	INCL	(SP20)	6140S	OPP	01	
		T (165)	225	288	175	34	INCL	(SP20)	6140S	OPP	01	

FOOT NOTES:

SP20: Speeds shown with transmission in low range. Multiply speeds by 1.28 for high range.

For complete part numbers, consult the PTO Series section (page 25)


Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

ASO140-9A
ASO145-9A
ASO150-9A
LASO115-9A(301594)
LASO125-9A(301595)
LASO135-9A(301597)
LASO140-9A
LASO145-9A(301596)
LASO150-9A
LPS9-VPD
LPSO125-9A(301548)(301568)
LPSO140-9A(301550)(301570)
LPSO150-9A(301551)(301571)
LPSO9-VPD
PS9-VPD
PSO125-9A(301499)(301556)
PSO140-9A(301432)(301557)
PSO150-9A(301496)(301558)
PSO9-VPD

SPIC.63

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		93	250	49	INCL	(SP5)		OPP	01	 2R
		C (73)		123	250	49	INCL	(SP5)		OPP	01	
		E (86)		147	225	44	INCL	(SP5)		OPP	01	
		J (95)		161	225	44	INCL	(SP5)		OPP	01	
		O (125)		211	200	39	INCL	(SP5)		OPP	01	
		R (137)		231	200	39	INCL	(SP5)		OPP	01	
		S (150)		253	190	37	INCL	(SP5)		OPP	01	
		T (165)		279	175	34	INCL	(SP5)		OPP	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)		84	250		INCL			OPP	01	 1B
		B (55)		93	250	49	INCL			OPP	01	
		C (73)		123	250	49	INCL			OPP	01	
		E (86)		147	225	44	INCL			OPP	01	
		J (95)		161	225	44	INCL			OPP	01	
		O (125)		211	200	39	INCL			OPP	01	
		R (137)		231	200	39	INCL			OPP	01	
		S (150)		253	190	37	INCL			OPP	01	
		T (165)		279	175	34	INCL			OPP	01	
	3800	Z (40)		68	250	49	INCL	CLUTCH SHIFT		OPP	01	 1B
		A (50)		84	250	49	INCL	CLUTCH SHIFT		OPP	01	
		B (55)		93	250	49	INCL	CLUTCH SHIFT		OPP	01	
		C (73)		123	250	49	INCL	CLUTCH SHIFT		OPP	01	
		E (86)		148	225	44	INCL	CLUTCH SHIFT		OPP	01	
		J (95)		162	225	44	INCL	CLUTCH SHIFT		OPP	01	
		O (125)		211	200	39	INCL	CLUTCH SHIFT		OPP	01	
		R (137)		231	200	39	INCL	CLUTCH SHIFT		OPP	01	
		S (150)		253	190	37	INCL	CLUTCH SHIFT		OPP	01	
		T (165)		278	175	34	INCL	CLUTCH SHIFT		OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Spicer

SPIC.63

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	4100	B (57)	96	450	87	INCL	(SP2)			OPP	01	 ↑ 1B
		C (70)	118	470	90	INCL	(SP2)			OPP	01	
		E (86)	145	470	90	INCL	(SP2)			OPP	01	
		J (105)	177	400	77	INCL	(SP2)			OPP	01	
	4250	Output 1 C (96)	162	420	80	INCL	(SP2)			OPP	01	 ↑ 1B
		Output 2 B (89)	151	420	80	INCL	(SP2)			OPP	01	
		Output 1 E (112)	190	400	76.5	INCL	(SP2)			OPP	01	
		Output 2 C (104)	175	420	80	INCL	(SP2)			OPP	01	
		Output 1 J (132)	223	380	73	INCL	(SP2)			OPP	01	
		Output 2 E (121)	204	400	76.5	INCL	(SP2)			OPP	01	
		Output 1 O (168)	285	350	67	INCL	(SP2)			OPP	01	
		Output 2 J (152)	257	380	73	INCL	(SP2)			OPP	01	
	6800	Forward (55)	123	150	30	INCL				BOTH	01	 ↑ 1B
		Reverse (52)	140	150	30	INCL				BOTH	01	
	8000	Forward (40)	70	500	95	INCL				BOTH	01	 ↑ 1B
		Reverse (50)	83	500	95	INCL				BOTH	01	
	8500	B (57)	64	500	95	INCL				OPP	01	 ↑ 1B
		C (70)	85	500	95	INCL				OPP	01	
		E (86)	101	480	90	INCL				OPP	01	
		J (105)	125	450	86	INCL				OPP	01	
		O (127)	145	400	76	INCL				OPP	01	
		R (137)	159	360	68	INCL				OPP	01	
		S (150)	174	320	62	INCL				OPP	01	
		T (165)	192	280	54	INCL				OPP	01	

FOOT NOTES:

SP5: Direct mount pumps need adapter to clear bulge on right side.

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

ASO10-VPD
ASO100-10S
ASO125-10S(301541)(301579)
ASO140-10S(301542)(301580)
ASO150-10S(301526)(301578)
ASO165-10S(301543)(301581)
LASO10-VPD
LASO125-10S(301620)
LASO140-10S(301621)
LASO150-10S(301622)
LLASO125-10S
LLASO140-10S
LLASO150-10S
LLPSO100-10S
LLPSO125-10S
LLPSO140-10S(301705)
LLPSO150-10S
LLPSO165-10S
LPSO10-VPD
LPSO100-10S
LPSO125-10S(301544)(301572)
LPSO140-10S(301545)(301573)
LPSO150-10S(301546)(301574)
LPSO165-10S
PSO10-VPD
PSO100-10S(301505)(301560)
PSO115-10V(301588)
PSO125-10S(301504)(301561)
PSO125-10V(301589)
PSO140-10S(301506)(301562)
PSO145-10V(301582)
PSO150-10S(301503)(301563)
PSO150-9S(301521)
PSO160-10S(301517)
PSO165-10S(301523)(301564)

SPIC.64

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		96	250	49	INCL			OPP	01	
		C (73)		127	250	49	INCL			OPP	01	
		E (86)		151	225	44	INCL			OPP	01	
	1000	J (95)		165	225	44	INCL			OPP	01	 2R
		O (125)		217	200	39	INCL			OPP	01	
		R (137)		238	200	39	INCL			OPP	01	
		S (150)		261	190	37	INCL			OPP	01	
		T (165)		287	175	34	INCL			OPP	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		87	250		INCL			OPP	01	
		B (55)		96	250	49	INCL			OPP	01	
		C (73)		127	250	49	INCL			OPP	01	
		E (86)		151	225	44	INCL			OPP	01	
	2000	J (95)		165	225	44	INCL			OPP	01	
		O (125)		217	200	39	INCL			OPP	01	 1B
		R (137)		238	200	39	INCL			OPP	01	
		S (150)		261	190	37	INCL			OPP	01	
		T (165)		287	175	34	INCL			OPP	01	

CONTINUES →

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

SPIC.64

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	3800	Z (40)	70	250	49	INCL	CLUTCH SHIFT			OPP	01	
		A (50)	87	250	49	INCL	CLUTCH SHIFT			OPP	01	
		B (55)	96	250	49	INCL	CLUTCH SHIFT			OPP	01	
		C (73)	127	250	49	INCL	CLUTCH SHIFT			OPP	01	
		E (86)	152	225	44	INCL	CLUTCH SHIFT			OPP	01	
		J (95)	166	225	44	INCL	CLUTCH SHIFT			OPP	01	
		O (125)	217	200	39	INCL	CLUTCH SHIFT			OPP	01	
		R (137)	238	200	39	INCL	CLUTCH SHIFT			OPP	01	
		S (150)	261	190	37	INCL	CLUTCH SHIFT			OPP	01	
		T (165)	286	175	34	INCL	CLUTCH SHIFT			OPP	01	
	4100	B (57)	99	450	87	INCL	(SP2)			OPP	01	
		C (70)	122	470	90	INCL	(SP2)			OPP	01	
		E (86)	150	470	90	INCL	(SP2)			OPP	01	
		J (105)	183	400	77	INCL	(SP2)			OPP	01	
	4250	Output 1 C (96)	167	420	80	INCL	(SP2)			OPP	01	
		Output 2 B (89)	155	420	80	INCL	(SP2)			OPP	01	
		Output 1 E (112)	196	400	76.5	INCL	(SP2)			OPP	01	
		Output 2 C (104)	181	420	80	INCL	(SP2)			OPP	01	
		Output 1 J (132)	229	380	73	INCL	(SP2)			OPP	01	
		Output 2 E (121)	210	400	76.5	INCL	(SP2)			OPP	01	
		Output 1 O (168)	293	350	67	INCL	(SP2)			OPP	01	
		Output 2 J (152)	265	380	73	INCL	(SP2)			OPP	01	
	6800	Forward (55)	127	150	30	INCL				BOTH	01	
		Reverse (52)	144	150	30	INCL				BOTH	01	
	8000	Forward (40)	72	500	95	INCL				BOTH	01	
		Reverse (50)	85	500	95	INCL				BOTH	01	
	8500	B (57)	66	500	95	INCL				OPP	01	
		C (70)	87	500	95	INCL				OPP	01	
		E (86)	104	480	90	INCL				OPP	01	
		J (105)	129	450	86	INCL				OPP	01	
		O (127)	149	400	76	INCL				OPP	01	
		R (137)	164	360	68	INCL				OPP	01	
		S (150)	179	320	62	INCL				OPP	01	
		T (165)	197	280	54	INCL				OPP	01	













FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

1241-CT
1241-DT
1241C(300977.301145.301151)
1241D(300978.301146.301152)

AMO1000-4C(301474)
AMO1000-4D(301475)
APO1000-4C(301476)
APO1000-4D(301477)

ATO1000-4C
ATO1000-4D
P1241C(301053)(301395)
P1241D(301054)(301396)

SPIC.65

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		100	250	49	INCL	(SP1)	GA6093	OPP	02	 2R
		C (73)		132	250	49	INCL	(SP1)	GA6093	OPP	02	
		E (86)		158	225	44	INCL	(SP1)	GA6093	OPP	02	
		J (95)		172	225	44	INCL	(SP1)	GA6093	OPP	02	
		O (125)		227	200	39	INCL	(SP1)	GA6093	OPP	02	
		R (137)		249	200	39	INCL	(SP1)	GA6093	OPP	02	
		S (150)		272	190	37	INCL	(SP1)	GA6093	OPP	02	
		T (165)		299	175	34	INCL	(SP1)	GA6093	OPP	02	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	2000	A (50)			250		INCL	(SP1)	GA8062	OPP	02	 4B
		B (55)		100	250	49	INCL	(SP1)	GA8062	OPP	02	
		C (73)		132	250	49	INCL	(SP1)	GA8062	OPP	02	
		E (86)		158	225	44	INCL	(SP1)	GA8062	OPP	02	
		J (95)		172	225	44	INCL	(SP1)	GA8062	OPP	02	
		O (125)		227	200	39	INCL	(SP1)	GA8062	OPP	02	
		R (137)		249	200	39	INCL	(SP1)	GA8062	OPP	02	
		S (150)		272	190	37	INCL	(SP1)	GA8062	OPP	02	
		T (165)		299	175	34	INCL	(SP1)	GA8062	OPP	02	
	6800	Forward (55)		114	150	30	INCL	(SP1)	GA8062	BOTH	02	 4B
		Reverse (52)		130	150	30	INCL	(SP1)	GA8062	BOTH	02	
	8000	Forward (40)		65	500	95	INCL	(SP1)	GA8062	BOTH	02	 4B
		Reverse (50)		77	500	95	INCL	(SP1)	GA8062	BOTH	02	
	8500	B (57)		59	500	95	INCL	(SP1)	GA8062	OPP	02	 4B
		C (70)		79	500	95	INCL	(SP1)	GA8062	OPP	02	
		E (86)		94	480	90	INCL	(SP1)	GA8062	OPP	02	
		J (105)		116	450	86	INCL	(SP1)	GA8062	OPP	02	
		O (127)		135	400	76	INCL	(SP1)	GA8062	OPP	02	
		R (137)		148	360	68	INCL	(SP1)	GA8062	OPP	02	
		S (150)		162	320	62	INCL	(SP1)	GA8062	OPP	02	
		T (165)		178	280	54	INCL	(SP1)	GA8062	OPP	02	

FOOT NOTES:

SP1: Speeds are shown with main transmission in direct drive.

For complete part numbers, consult the PTO Series section (page 25)

Spicer

ASO125-10D
ASO125-9A

ASO135-10D
ASO135-9A

PSO125-10D
PSO135-10D

PSO145-10D
PSO155-10D

PSO165-10D

SPIC.66

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		B (55)		100	250	49	INCL			OPP	01	
		C (73)		132	250	49	INCL			OPP	01	
		E (86)		157	225	44	INCL			OPP	01	
		J (95)		172	225	44	INCL			OPP	01	
	1000	O (125)		226	200	39	INCL			OPP	01	 2R
		R (137)		248	200	39	INCL			OPP	01	
		S (150)		272	190	37	INCL			OPP	01	
		T (165)		299	175	34	INCL			OPP	01	

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
		A (50)		91	250		INCL			OPP	01	
		B (55)		100	250	49	INCL			OPP	01	
		C (73)		132	250	49	INCL			OPP	01	
		E (86)		157	225	44	INCL			OPP	01	
	2000	J (95)		172	225	44	INCL			OPP	01	
		O (125)		226	200	39	INCL			OPP	01	 1B
		R (137)		248	200	39	INCL			OPP	01	
		S (150)		272	190	37	INCL			OPP	01	
		T (165)		299	175	34	INCL			OPP	01	
		Z (40)		72	250	49	INCL	CLUTCH SHIFT		OPP	01	
		A (50)		91	250	49	INCL	CLUTCH SHIFT		OPP	01	
		B (55)		100	250	49	INCL	CLUTCH SHIFT		OPP	01	
		C (73)		132	250	49	INCL	CLUTCH SHIFT		OPP	01	
		E (86)		158	225	44	INCL	CLUTCH SHIFT		OPP	01	
	3800	J (95)		173	225	44	INCL	CLUTCH SHIFT		OPP	01	 1B
		O (125)		226	200	39	INCL	CLUTCH SHIFT		OPP	01	
		R (137)		248	200	39	INCL	CLUTCH SHIFT		OPP	01	
		S (150)		272	190	37	INCL	CLUTCH SHIFT		OPP	01	
		T (165)		298	175	34	INCL	CLUTCH SHIFT		OPP	01	

CONTINUES →

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

ASO125-10D
ASO125-9A

ASO135-10D
ASO135-9A

PSO125-10D
PSO135-10D

PSO145-10D
PSO155-10D

PSO165-10D

SPIC.66

8 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
← CONTINUES												
	4100	B (57)	103	450	87	INCL	(SP2)			OPP	01	 ↑ 1B
		C (70)	127	470	90	INCL	(SP2)			OPP	01	
		E (86)	156	470	90	INCL	(SP2)			OPP	01	
		J (105)	190	400	77	INCL	(SP2)			OPP	01	
	4250	Output 1 C (96)	174	420	80	INCL	(SP2)			OPP	01	 ↑ 1B
		Output 2 B (89)	162	420	80	INCL	(SP2)			OPP	01	
		Output 1 E (112)	204	400	76.5	INCL	(SP2)			OPP	01	
		Output 2 C (104)	188	420	80	INCL	(SP2)			OPP	01	
		Output 1 J (132)	239	380	73	INCL	(SP2)			OPP	01	
		Output 2 E (121)	219	400	76.5	INCL	(SP2)			OPP	01	
		Output 1 O (168)	305	350	67	INCL	(SP2)			OPP	01	
		Output 2 J (152)	276	380	73	INCL	(SP2)			OPP	01	
	6800	Forward (55)	132	150	30	INCL				BOTH	01	 ↑ 1B
		Reverse (52)	150	150	30	INCL				BOTH	01	
	8000	Forward (40)	75	500	95	INCL				BOTH	01	 ↑ 1B
		Reverse (50)	89	500	95	INCL				BOTH	01	
	8500	B (57)	68	500	95	INCL				OPP	01	 ↑ 1B
		C (70)	91	500	95	INCL				OPP	01	
		E (86)	108	480	90	INCL				OPP	01	
		J (105)	134	450	86	INCL				OPP	01	
		O (127)	156	400	76	INCL				OPP	01	
		R (137)	171	360	68	INCL				OPP	01	
		S (150)	187	320	62	INCL				OPP	01	
		T (165)	205	280	54	INCL				OPP	01	

FOOT NOTES:

SP2: Possible internal transmission gear interference with 4100 series "J" & "O" ratios. Check before installing PTO.

Spicer TTC

For complete part numbers, consult the PTO Series section (page 25)

Spicer

AS56-7B AMT-7 **ES56-7B(301739)**

SPIC.69

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
		C (73)		48	250	49	INCL	(SP3,4,13)		OPP	51	
		E (86)		58	225	44	INCL	(SP3,4,13)		OPP	51	
		J (95)		63	225	44	INCL	(SP3,4,13)		OPP	51	
	1010	O (125)		83	200	39	INCL	(SP3,4,13)		OPP	51	
		R (137)		91	200	39	INCL	(SP3,4,13)		OPP	51	
		S (150)		100	190	37	INCL	(SP3,4,13)		OPP	51	
		T (165)		110	175	34	INCL	(SP3,4,13)		OPP	51	

FOOT NOTES:

SP3: Check for possible interference with exhaust.

SP4: Possible clearance issue with direct mount pump. May need to use "3" assembly arrangement.

SP13: Left Side: Direct mount pump interferes with flange on transmission at rear of PTO opening. Shaft-high assembly arrangement interferes with bulge in transmission case.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

Volvo Index

Transmission Model	Pag.
AT-2412C	401
AT-2412D	401
AT-2512C	401
AT-2612D	401
AT-2612E	401
AT-2612F	401
AT-2812C	401
AT-2812D	401
ATO-2512C	403
ATO-2612D	403
ATO-2612F	403
ATO-3112C	403
ATO-3112D	403
DT-2412C	404
MR-61	404
MR-62	404
R-51	405
R-52	405
R-61	404
R-62	404
R-70	404
R-1000	400
R-1400	400
R-1700	400
SR-52	405
SR-61	405
SR-62	405
SR-70	405
SR-1400	401
SR-1700	401
SR-1900	401
SR-2000	400
SRO-2400	402
V-2412AT	401
V-2512AT	401
V-2812AT	401
VO-2512AT	403
VO-3112AT	403
VT-809	400
VT-1309	400
VT-1414	400
VT-1708	400
VT-2009B	400
VT-2014B	401
VT-2214B	401
VT-2412B	402
VT-2512C	401
VT-2514B	401
VT-2812C	401
VTO-2214B	403
VTO-2512C	403
VTO-2514B	403
VTO-3112C	403

Volvo

SR-2000

VVO.01

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1196K03		100%	65	82	609	118	INCL		L=267 110104 L=302 110304	OPP		
1197K03		130%	85	107	361	70	INCL		L=267 110104 L=302 110304	ENG		
1198K03		132%	86	108	310	60	INCL		L=267 110104 L=302 110304	ENG		
11111K03		180%	118	148	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=267 110104 L=302 110304	ENG		
11104K03		185%	120	152	413	80	INCL	BUILT-IN CLUTCH	L=267 110104 L=302 110304	ENG		
11105K03		159%	104	131	310	60	INCL		L=265 110204 L=300 110504	ENG		
11106k03		162%	106	133	413	80	INCL		L=265 110204 L=300 110504	ENG		
11107KXXX			[1]: 54 [2]: 119	[1]: 69 [2]: 150	332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=265 110204 L=300 110504	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

R-1000
R-1400
R-1700
VT-1309
VT-1414
VT-1708
VT-2009B
VT-809

VVO.02

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1196K03		100%	70		609	118	INCL		L=267 110104 L=302 110304	OPP		
1197K03		130%	91		361	70	INCL		L=267 110104 L=302 110304	ENG		
1198K03		132%	92		310	60	INCL		L=267 110104 L=302 110304	ENG		
11111K03		180%	126		361	70	INCL	H.DUTY, ROTATED OUTPUT	L=267 110104 L=302 110304	ENG		
11104K03		185%	130		413	80	INCL	BUILT-IN CLUTCH	L=267 110104 L=302 110304	ENG		
11105K03		159%	111	0	310	60	INCL		L=265 110204 L=300 110504	ENG		
11106k03		162%	113	0	413	80	INCL		L=265 110204 L=300 110504	ENG		
11107KXXX			[1]: 59 [2]: 129		332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=265 110204 L=300 110504	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SR-1400 **SR-1700** **SR-1900** **VT-2014B** **VT-2214B** **VT-2514B**

VVO.03

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1196K03		100%	70	88	609	118	INCL		L=267 110104 L=302 110304	OPP		
1197K03		130%	91	114	361	70	INCL		L=267 110104 L=302 110304	ENG		
1198K03		132%	92	116	310	60	INCL		L=267 110104 L=302 110304	ENG		
11111K03		180%	126	158	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=267 110104 L=302 110304	ENG		
11104K03		185%	130	163	413	80	INCL	BUILT-IN CLUTCH	L=267 110104 L=302 110304	ENG		
11105K03		159%	111	139	310	60	INCL		L=265 110204 L=300 110504	ENG		
11106k03		162%	113	142	413	80	INCL		L=265 110204 L=300 110504	ENG		
11107KXXX			[1]: 59 [2]: 129	[1]: 74 [2]: 162	332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=265 110204 L=300 110504	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

AT-2412C **AT-2612D** **AT-2812C** **V-2512AT** **VT-2812C**
AT-2412D **AT-2612E** **AT-2812D** **V-2812AT**
AT-2512C **AT-2612F** **V-2412AT** **VT-2512C**

VVO.04

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1196K03		100%	70	90	609	118	INCL		L=229 116504	OPP		
1197K03		130%	91	117	361	70	INCL		L=229 116504	ENG		
1198K03		132%	92	119	310	60	INCL		L=229 116504	ENG		
11111K03		180%	126	162	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=229 116504	ENG		
11104K03		185%	130	167	413	80	INCL	BUILT-IN CLUTCH	L=229 116504	ENG		
11105K03		159%	111	143	310	60	INCL		L=227 116704	ENG		
11106k03		162%	113	146	413	80	INCL		L=227 116704	ENG		
11107KXXX			[1]: 59 [2]: 129	[1]: 76 [2]: 166	332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=227 116704	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

For complete part numbers, consult the PTO Series section (page 25)

Volvo

VT-2412B

VVO.05

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1196K03		100%	70	90	609	118	INCL		L=267 110104 L=302 110304	OPP		
1197K03		130%	91	117	361	70	INCL		L=267 110104 L=302 110304	ENG		
1198K03		132%	92	119	310	60	INCL		L=267 110104 L=302 110304	ENG		
11111K03		180%	126	162	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=267 110104 L=302 110304	ENG		
11104K03		185%	130	167	413	80	INCL	BUILT-IN CLUTCH	L=267 110104 L=302 110304	ENG		
11105K03		159%	111	143	310	60	INCL		L=265 110204 L=300 110504	ENG		
11106k03		162%	113	146	413	80	INCL		L=265 110204 L=300 110504	ENG		
11107KXXX			[1]: 59 [2]: 129	[1]: 76 [2]: 166	332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=265 110204 L=300 110504	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

SRO-2400

VVO.06

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1196K03		100%	82	103	609	118	INCL		L=267 110104 L=302 110304	OPP		
1197K03		130%	107	134	361	70	INCL		L=267 110104 L=302 110304	ENG		
1198K03		132%	108	136	310	60	INCL		L=267 110104 L=302 110304	ENG		
11111K03		180%	148	186	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=267 110104 L=302 110304	ENG		
11104K03		185%	152	191	413	80	INCL	BUILT-IN CLUTCH	L=267 110104 L=302 110304	ENG		
11105K03		159%	131	164	310	60	INCL		L=265 110204 L=300 110504	ENG		
11106k03		162%	133	167	413	80	INCL		L=265 110204 L=300 110504	ENG		
11107KXXX			[1]: 68 [2]: 150	[1]: 86 [2]: 189	332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=265 110204 L=300 110504	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

VTO-2214B **VTO-2514B**

VVO.07

4 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1196K03		100%	88	109	609	118	INCL		L=267 110104 L=302 110304	OPP		
1197K03		130%	114	142	361	70	INCL		L=267 110104 L=302 110304	ENG		
1198K03		132%	116	144	310	60	INCL		L=267 110104 L=302 110304	ENG		
11111K03		180%	158	197	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=267 110104 L=302 110304	ENG		
11104K03		185%	163	202	413	80	INCL	BUILT-IN CLUTCH	L=267 110104 L=302 110304	ENG		
11105K03		159%	139	174	310	60	INCL		L=265 110204 L=300 110504	ENG		
11106k03		162%	142	177	413	80	INCL		L=265 110204 L=300 110504	ENG		
11107KXXX			[1]: 73 [2]: 162	[1]: 92 [2]: 201	332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=265 110204 L=300 110504	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

ATO-2512C **ATO-2612F** **ATO-3112D** **VO-3112AT** **VTO-3112C**
ATO-2612D **ATO-3112C** **VO-2512AT** **VTO-2512C**

VVO.08

4 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1196K03		100%	90	115	609	118	INCL		L=229 116504	OPP		
1197K03		130%	117	150	361	70	INCL		L=229 116504	ENG		
1198K03		132%	119	152	310	60	INCL		L=229 116504	ENG		
11111K03		180%	162	208	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=229 116504	ENG		
11104K03		185%	167	213	413	80	INCL	BUILT-IN CLUTCH	L=229 116504	ENG		
11105K03		159%	143	184	310	60	INCL		L=227 116704	ENG		
11106k03		162%	146	187	413	80	INCL		L=227 116704	ENG		
11107KXXX			[1]: 76 [2]: 166	[1]: 97 [2]: 212	332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=227 116704	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

For complete part numbers, consult the PTO Series section (page 25)

Volvo

DT-2412C

VVO.09

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1196K03		100%	70	88	609	118	INCL		L=229 116504	OPP		
1197K03		130%	91	114	361	70	INCL		L=229 116504	ENG		
1198K03		132%	92	116	310	60	INCL		L=229 116504	ENG		
11111K03		180%	126	158	361	70	INCL	H.DUTY, ROTATED OUTPUT	L=229 116504	ENG		
11104K03		185%	130	163	413	80	INCL	BUILT-IN CLUTCH	L=229 116504	ENG		
11105K03		159%	111	139	310	60	INCL		L=227 116704	ENG		
11106k03		162%	113	142	413	80	INCL		L=227 116704	ENG		
11107KXXX			[1]: 59 [2]: 129	[1]: 74 [2]: 161	332 369	64 71	INCL	TWIN OUTPUT [1]=SHAFT 1. [2]=SHAFT 2.	L=227 116704	(1)ENG/ (2)OPP		

IMPORTANT NOTE: All shown references are Base PTO Kits. For a full PTO is also required an adapter shaft kit.

MR-61 MR-62 R-61 R-62

VVO.10

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
110403		100%	103		229	60	INCL			ENG		

R-70

VVO.11

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
110603		100%	111		229	60	INCL			ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

SR-61 **SR-62**

VVO.12

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
110403		100%	103		229	60	INCL			ENG		

SR-70

VVO.13

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
110603		100%	111		229	60	INCL			ENG		

R-51 **R-52** **SR-52**

VVO.14

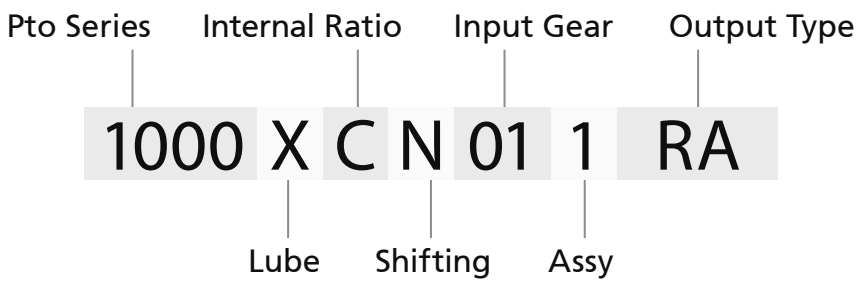
4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
110203		100%	76		229	60	INCL			ENG		

For complete part numbers, consult the PTO Series section (page 25)

Warner Index

Transmission Model	Pag.
T-18	**408**
T-18A	**409**
T-18B	**408**
T-18C	**409**
T-19	**408**
T-19A	**408**
T-19D	**409**
T-98-1R	**408**
T-98-1V	**408**
T-98A	**408**


EXAMPLE:



Warner

T-18 **T-19** **T-98-1R** **T-98-1V** **T-98A**

WNR.01

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1000	B (55)		36	250	49	INCL	(WNR1,2)		OPP	39	
		C (73)		47	250	49	INCL	(WNR1,2)		OPP	39	
		E (86)		56	225	44	INCL	(WNR1,2)		OPP	39	
		J (95)		61	225	44	INCL	(WNR1,2)		OPP	39	
		O (125)		81	200	39	INCL	(WNR1,2)		OPP	39	
		R (137)		89	200	39	INCL	(WNR1,2)		OPP	39	
		S (150)		97	190	37	INCL	(WNR1,2)		OPP	39	
		T (165)		107	175	34	INCL	(WNR1,2)		OPP	39	
	6000	Forward (73)		47	150	30	INCL	(WNR1,2)		BOTH	39	
		Reverse (83)		54	150	30	INCL	(WNR1,2)		BOTH	39	

FOOT NOTES:

WNR1: Transmission will have only one PTO opening. It may be on the right or left side, but not both.

WNR2: Possible cross-member interference.

T-18B **T-19A**

WNR.03

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
	1010	B (55)		46	250	49	INCL	(WNR1,2)		OPP	41	
		C (73)		61	250	49	INCL	(WNR1,2)		OPP	41	
		E (86)		73	225	44	INCL	(WNR1,2)		OPP	41	
		J (95)		80	225	44	INCL	(WNR1,2)		OPP	41	
		O (125)		105	200	39	INCL	(WNR1,2)		OPP	41	
		R (137)		115	200	39	INCL	(WNR1,2)		OPP	41	
		S (150)		126	190	37	INCL	(WNR1,2)		OPP	41	
		T (165)		139	175	34	INCL	(WNR1,2)		OPP	41	

FOOT NOTES:

WNR1: Transmission will have only one PTO opening. It may be on the right or left side, but not both.

WNR2: Possible cross-member interference.

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

T-18A **T-18C** **T-19D**

WNR.04

6 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1010		B (55)		50	250	49	INCL	(WNR1,2)		OPP	41	
		C (73)		66	250	49	INCL	(WNR1,2)		OPP	41	
		E (86)		79	225	44	INCL	(WNR1,2)		OPP	41	
		J (95)		86	225	44	INCL	(WNR1,2)		OPP	41	
		O (125)		113	200	39	INCL	(WNR1,2)		OPP	41	
		R (137)		124	200	39	INCL	(WNR1,2)		OPP	41	
		S (150)		136	190	37	INCL	(WNR1,2)		OPP	41	
		T (165)		149	175	34	INCL	(WNR1,2)		OPP	41	

FOOT NOTES:

WNR1: Transmission will have only one PTO opening. It may be on the right or left side, but not both.

WNR2: Possible cross-member interference.

For complete part numbers, consult the PTO Series section (page 25)

ZF Index

Transmission Model	Pag.
4-120GP/8.05	453
4-120GP/9.16	449
4-120GP/10.91	444
4-150GP/9.19	446
5-90GP/13	451
5-90GP/13.01	451
5-110GP/8.20	453
5-110GP/9.72	449
5-110GP/11.2	453
5-110GP/13.1	449
5-110GPA	448
5-111GP/13.04	446
5S-270 VO	438
6AS700/6.02-0.79	428
6AS800 TO/6.58 - 0.78	424
6AS1000 TO/6.75 - 0.78	424
6S-300	433
6S-350 VD	434
6S-380 VO	434
6S-400	434
6S700/6.02-0.79	428
6S800 TO/6.58-0.78(VOLVO ZTO 1006)	424
6S850/6.72-0.79	457
6S850/8.51-1.0	416
6S1000 TO/6.75 - 0.78	424
6S1200 TD/7.72 - 1.00	425
6S1200 TO/6.75 - 0.83	432
8S151/13.79	452
8S220 TO/11.54-0.84	455
8S1620 TD/13.80-1.0	451
8S1820 TO/11.54-0.84	455
9S75/9.56	449
9S75/13.16	431
9S109/10.24	442
9S109/10.25	442
9S109/12.91	435
9S109/12.92	436
9S1110 TD/12.73	435
9S1110 TO/9.48-0.75 (VOLVO ZTO 1109)	453
9S1310 TO/9.48	453
12AS1010TO	454
12AS1210TO	454
12AS1420TD	443
12AS1420TO	454
12AS1620TO	454
12AS1630 TD/15.86-1.0	446
12AS1631 TD/15.86-1.0 IT	446
12AS1800/14.89-1.0 IT	439
12AS1930 TD/15.86-1.0	446
12AS1930 TO/12.33-0.78	456
12AS1931 TD/15.86-1.0 IT	446
12AS1931 TO/12.33-0.78 IT	456
12AS2130 TD/15.86-1.0	446
12AS2130 TO/12.33-0.78	456
12AS2131 TD/15.86-1.0 IT	446
12AS2131 TO/12.33-0.78 IT	456
12AS2140 TD/15.86-1.0	446
12AS2141 TD/15.86-1.0 IT	446

Transmission Model	Pag.
12AS2301 TD/15.86-1.0 IT	446
12AS2301 TO/12.33-0.78 IT	456
12AS2330 TO/12.33-0.78	456
12AS2331 TO/12.33-0.78 IT	456
12AS2340 TD/15.86-1.0	446
12AS2341 TD/15.86-1.0 IT	446
12AS2430 TD/15.86-1.0	446
12AS2431 TD/15.86-1.0 IT	446
12AS2530 TO/12.33-0.78	456
12AS2531 TO/12.33-0.78 IT	456
12AS2531 TO/15.86-1.0	445
12AS2540 TD/15.86-1.0	446
12AS2540 TO/12.29-0.78	456
12AS2541 TO/12.29-0.78 IT	456
12AS2740 TO/12.29-0.78	456
12AS2741 TO/12.29-0.78 IT	456
12AS2940 TO/12.29-0.78	456
12AS2941 TO/12.29-0.78 IT	456
12S2100 TD/15.57-1.0	445
12S2101 TD/15.57-1.0 IT3	445
12S2300 TD/15.57-1.0	445
12S2301 TD/15.57-1.0 IT3	445
12S2800 TD/15.57-1.0	445
12S2801 TD/15.57-1.0 IT3	445
12TX-1410TD/16.69-1.0,	458
12TX-1610TD/16.69-1.0,	458
12TX-1610TO/12.92-0.77,	459
12TX-1810TD/16.69-1.0,	458
12TX-1810TO/12.92-0.77,	459
12TX-2010TD/16.69-1.0,	458
12TX-2010TO/12.92-0.77,	459
12TX-2210TD/16.69-1.0,	458
12TX-2210TO/12.92-0.77,	459
12TX-2410TO/12.92-0.77,	459
12TX-2420TD/16.69-1.0,	458
12TX-2610TO/12.92-0.77,	459
12TX-2620TD/16.69-1.0,	458
12TX-2820TD/16.69-1.0.	458
12TX-2820TO/12.92-0.77,	459
12TX-3020TO/12.92-0.77,	459
12TX-3220TO/12.92-0.77,	459
12TX-3420TO/12.92-0.77.	459
16AS2200/15.89-1.0 IT	435
16AS2230 TD/17.03-1.0	439
16AS2231 TD/17.03-1.0 IT	439
16AS2601 TD/17.03-1.0 IT	439
16AS2601 TO/14.12-0.83	455
16AS2630 TO/14.12-0.83	455
16AS2631 TO/14.12-0.83 IT	455
16S109/11.86	438
16S109/13.30	444
16S109/13.31	437
16S109/13.42	444
16S109/13.53	443
16S112/11.46 (TRILOBE)	447
16S112/13.68 (TRILOBE)	447
16S130/11.46 (TRILOBE)	446
16S130/11.74 (TRILOBE)	446

ZF Index

Transmission Model	Pag.
16S130/13.68 (TRILOBE)	446
16S130/13.80 (TRILOBE)	441
16S130/14.14 (TRILOBE)	441
16S130/14.29 (TRILOBE)	437
16S130/16.47 (TRILOBE)	441
16S130/17.06 (TRILOBE)	437
16S130/17.47 (TRILOBE)	437
16S150/16.47/13.80 (TRILOBE)	442
16S151/13.80IT	441
16S151/13.80IT (TRILOBE)	440
16S151/13.85-0.84	440
16S151/13.85-0.84 (TRILOBE)	440
16S151/13.85IT	441
16S151/16.41IT	441
16S151/16.47IT	441
16S151/16.53-1.0	440
16S151/16.53-1.0 (TRILOBE)	440
16S151/16.53IT	441
16S160/11.46 (TRILOBE)	448
16S160/13.68 (TRILOBE)	448
16S160/14.29 (TRILOBE)	437
16S160/17.06 (TRILOBE)	437
16S160A/11.74 (TRILOBE)	447
16S160A/14.14 (TRILOBE)	442
16S160A/17.47 (TRILOBE)	436
16S181/13.80IT	441
16S181/13.85-0.84	440
16S181/13.85IT	441
16S181/16.41IT	441
16S181/16.47IT	441
16S181/16.53-1.0	440
16S181/16.53IT	441
16S190/11.46 (TRILOBE)	447
16S190/13.68 (TRILOBE)	448
16S190A/11.74 (TRILOBE)	448
16S190A/17.47 (TRILOBE)	436
16S220/13.80IT (TRILOBE)	440
16S220/13.80 (TRILOBE)	448
16S220/16.47 (TRILOBE)	448
16S220A/14.14 (TRILOBE)	442
16S221/13.80IT	441
16S221/13.80IT (TRILOBE)	440
16S221/13.85-0.84	440
16S221/13.85-0.84 (TRILOBE)	440
16S221/13.85IT	441
16S221/16.41IT	441
16S221/16.47IT	441
16S221/16.53-1.0	440
16S221/16.53-1.0 (TRILOBE)	440
16S221/16.53IT	441
16S251IT	441
16S1620 TD/16.41-1.0	439
16S1621 TD/16.41-1.0 IT	439
16S1820 TO/13.80-0.84	451
16S1821 TO/13.80-0.84 IT	452
16S1920 TD/16.41-1.0	439
16S1921 TD/16.41-1.0 IT	439
16S2220 TD/16.41-1.0	439
16S2220 TO/13.80-0.84	451
16S2221 TD/16.41-1.0 IT	439
16S2221 TO/13.80-0.84 IT	452
16S2320 TD/16.41-1.0	439
16S2321 TD/16.41-1.0 IT	439
16S2330 TD/16.41-1.0	439
16S2331 TD/16.41-1.0 IT	439
16S2520 TO/13.80-0.84	451
16S2521 TO/13.80-0.84 IT	452

Transmission Model	Pag.
16S2720 TO/13.80-0.84	451
16S2720 TO/13.80-0.84 IT + WSK	452
16S2721 TO/13.80-0.84 IT	452
16S2730 TO/13.80-0.84	451
16S2731 TO/13.80-0.84 IT	452
16TX-1640TD/17.94-1.0,	458
16TX-1840TD/17.94-1.0,	458
16TX-1840TO/14.68-0.82,	458
16TX-2040TD/17.94-1.0,	458
16TX-2040TO/14.68-0.82,	458
16TX-2240TD/17.94-1.0,	458
16TX-2240TO/14.68-0.82,	458
16TX-2440TD/17.94-1.0,	458
16TX-2440TO/14.68-0.82,	458
16TX-2640TD/17.94-1.0,	458
16TX-2640TO/14.68-0.82,	458
16TX-2840TD/17.94-1.0.	458
16TX-2840TO/14.68-0.82,	458
16TX-3040TO/14.68-0.82,	458
16TX-3240TO/14.68-0.82,	458
16TX-3440TO/14.68-0.82.	458
2840.6	434
S5-24/6.34	450
S5-24/6.40	450
S5-30/7.31	429
S5-30/8.00	425
S5-30/8.50	421
S5-35/5.64	432
S5-35/6.45	426
S5-35/6.75	424
S5-35/6.79	434
S5-35/7.65	418
S5-35/8.02	417
S5-42/4.65	444
S5-42/5.72	457
S5-42/6.56	454
S5-42/7.55	455
S5-50/5.30	433
S5-50/5.50	431
S5-50/6.20	426
S5-50/6.61	422
S5-50/6.61+GV80/5.30	422
S5-50/8.02	416
S5-50/8.02+GV80/6.20	416
S5-90GPA	450
S6-36/6.06	429
S6-36/6.93-0.8	456
S6-36/7.43-0.85+GV36	420
S6-36/7.43-1.0	421
S6-36/8.97-0.83+GV36	415
S6-36/8.97-1.0	415
S6-65/6.37	433
S6-65/6.70, S6-80/6.7	432
S6-65/7.0+GV70/7.67	414
S6-65/7.40	428
S6-65/7.52	427
S6-65/7.97+GV80/6.70	424
S6-65/9.00	418
S6-65/9.00+GV80/6.70	419
S6-65/9.00+GV80/7.52	418
S6-66/7.36-1.0	423
S6-66/9.06-1.0	415
S6-70/6.8	422
S6-70/6.8+GV70/5.71	423
S6-70/7.36	421
S6-70/7.92	417
S6-70/9.03	414

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

Transmission Model	Pag.
S6-70/9.59	414
S6-75/6.70+GV80/7.52	427
S6-80/5.03	443
S6-80/5.66	436
S6-80/5.66+GV80/7.52	427
S6-80/6.7+GV80/5.30	432
S6-80/6.10	435
S6-80/6.90	423
S6-80/7.35	426
S6-80/7.41	428
S6-80/7.53	427
S6-80/7.67	425
S6-80/7.67+GV80/6.7	425
S6-80/7.90	456
S6-80/9.00	417
S6-80/9.00+GV80/5.30	419
S6-80/9.00+GV80/7.48	419
S6-80/9.00+GV80/7.52	418
S6-90/5.67	438
S6-90/5.74	436
S6-90/6.37	436
S6-90/6.98	431
S6-90/7.03	430
S6-90/7.03+GV90/5.67	430
S6-90/7.03+GV90/5.74	430
S6-90/7.40	429
S6-90/9.01	420
S6-90/9.01+GV90/7.40	420

S6-70/9.59

ZDF.01

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	36		609	118	INCL			OPP		
1021903		126%	45		516	100	INCL			ENG		
1010003		132%	48		310	60	INCL			ENG		
1029003		180%	65		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	55		310	60	INCL	ROTATED OUTPUT		ENG		

S6-65/7.0+GV70/7.67

ZDF.02

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	36	46	609	118	INCL			OPP		
1021903		126%	45	58	516	100	INCL			ENG		
1010003		132%	48	61	310	60	INCL			ENG		
1029003		180%	65	83	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	55	70	310	60	INCL	ROTATED OUTPUT		ENG		

S6-70/9.03

ZDF.03

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	39		609	118	INCL			OPP		
1021903		126%	49		516	100	INCL			ENG		
1010003		132%	51		310	60	INCL			ENG		
1029003		180%	70		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	60		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

S6-36/8.97-0.83+GV36

ZDF.04

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	39	48	435	84	INCL			OPP		
1027203		126%	49	60	435	84	INCL			ENG		
109903		132%	51	63	310	60	INCL			ENG		
1030903		180%	70	87	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	60	73	310	60	INCL	ROTATED OUTPUT		ENG		

S6-36/8.97-1.0

ZDF.05

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	40		435	84	INCL			OPP		
1027203		126%	50		435	84	INCL			ENG		
109903		132%	53		310	60	INCL			ENG		
1030903		180%	72		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	61		310	60	INCL	ROTATED OUTPUT		ENG		

S6-66/9.06-1.0

ZDF.06

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	42		609	118	INCL			OPP		
1021903		126%	53		516	100	INCL			ENG		
1010003		132%	55		310	60	INCL			ENG		
1029003		180%	75		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	64		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

6S850/8.51-1.0

ZDF.07

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	42		435	84	INCL			OPP		
1027203		126%	53		435	84	INCL			ENG		
109903		132%	55		310	60	INCL			ENG		
1030903		180%	75		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	64		310	60	INCL	ROTATED OUTPUT		ENG		

S5-50/8.02+GV80/6.20

ZDF.08

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	42	55	609	118	INCL			OPP		
1021903		126%	53	69	516	100	INCL			ENG		
1010003		132%	55	73	310	60	INCL			ENG		
1029003		180%	75	99	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	64	84	310	60	INCL	ROTATED OUTPUT		ENG		

S5-50/8.02

ZDF.09

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	42		609	118	INCL			OPP		
1021903		126%	53		516	100	INCL			ENG		
1010003		132%	55		310	60	INCL			ENG		
1029003		180%	75		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	64		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

S5-35/8.02

ZDF.10

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1023203		100%	44		444	86	INCL			OPP		
1011103		132%	58		310	60	INCL			ENG		

S6-70/7.92

ZDF.11

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	44		609	118	INCL			OPP		
1021903		126%	55		516	100	INCL			ENG		
1010003		132%	58		310	60	INCL			ENG		
1029003		180%	80		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	67		310	60	INCL	ROTATED OUTPUT		ENG		

S6-80/9.00

ZDF.12

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	46		609	118	INCL			OPP		
1021903		126%	58		516	100	INCL			ENG		
1010003		132%	61		310	60	INCL			ENG		
1029003		180%	83		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	70		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

S6-65/9.00

ZDF.13

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	46		609	118	INCL			OPP		
1021903		126%	58		516	100	INCL			ENG		
1010003		132%	61		310	60	INCL			ENG		
1029003		180%	83		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	70		310	60	INCL	ROTATED OUTPUT		ENG		

S5-35/7.65

ZDF.14

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1023203		100%	46		444	86	INCL			OPP		
1011103		132%	61		310	60	INCL			ENG		

S6-65/9.00+GV80/7.52 S6-80/9.00+GV80/7.52

ZDF.15

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	46	55	609	118	INCL			OPP		
1021903		126%	58	69	516	100	INCL			ENG		
1010003		132%	61	73	310	60	INCL			ENG		
1029003		180%	83	99	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	70	84	310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

S6-80/9.00+GV80/7.48

ZDF.16

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	46	56	609	118	INCL			OPP		
1021903		126%	58	71	516	100	INCL			ENG		
1010003		132%	61	74	310	60	INCL			ENG		
1029003		180%	83	100	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	70	86	310	60	INCL	ROTATED OUTPUT		ENG		

S6-65/9.00+GV80/6.70

ZDF.17

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	46	62	609	118	INCL			OPP		
1021903		126%	58	78	516	100	INCL			ENG		
1010003		132%	61	82	310	60	INCL			ENG		
1029003		180%	83	112	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	70	95	310	60	INCL	ROTATED OUTPUT		ENG		

S6-80/9.00+GV80/5.30

ZDF.18

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	46	79	609	118	INCL			OPP		
1021903		126%	58	100	516	100	INCL			ENG		
1010003		132%	61	104	310	60	INCL			ENG		
1029003		180%	83	142	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	70	121	310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

S6-90/9.01

ZDF.19

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	47		609	118	INCL			OPP		
1021903		126%	59		516	100	INCL			ENG		
1010003		132%	62		310	60	INCL			ENG		
1029003		180%	85		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	72		310	60	INCL	ROTATED OUTPUT		ENG		

S6-90/9.01+GV90/7.40

ZDF.20

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	47	57	609	118	INCL			OPP		
1021903		126%	59	72	516	100	INCL			ENG		
1010003		132%	62	75	310	60	INCL			ENG		
1029003		180%	85	103	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	72	87	310	60	INCL	ROTATED OUTPUT		ENG		

S6-36/7.43-0.85+GV36

ZDF.21

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	48	56	435	84	INCL			OPP		
1027203		126%	60	71	435	84	INCL			ENG		
109903		132%	63	74	310	60	INCL			ENG		
1030903		180%	87	100	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	73	86	310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

S6-70/7.36

ZDF.22

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	48		609	118	INCL			OPP		
1021903		126%	60		516	100	INCL			ENG		
1010003		132%	63		310	60	INCL			ENG		
1029003		180%	87		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	73		310	60	INCL	ROTATED OUTPUT		ENG		


S6-36/7.43-1.0

ZDF.23

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	48		435	84	INCL			OPP		
1027203		126%	60		435	84	INCL			ENG		
109903		132%	63		310	60	INCL			ENG		
1030903		180%	87		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	73		310	60	INCL	ROTATED OUTPUT		ENG		

S5-30/8.50

ZDF.24

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
105203		105%	50		258	50	INCL	PNEUMATIC		OPP		
107503		105%	50		258	50	INCL	MECHANIC		OPP		

For complete part numbers, consult the PTO Series section (page 25)

S5-50/6.61

ZDF.25

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	51		609	118	INCL			OPP		
1021903		126%	64		516	100	INCL			ENG		
1010003		132%	67		310	60	INCL			ENG		
1029003		180%	92		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	78		310	60	INCL	ROTATED OUTPUT		ENG		

S5-50/6.61+GV80/5.30

ZDF.26

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	51	64	609	118	INCL			OPP		
1021903		126%	64	81	516	100	INCL			ENG		
1010003		132%	67	84	310	60	INCL			ENG		
1029003		180%	92	115	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	78	98	310	60	INCL	ROTATED OUTPUT		ENG		

S6-70/6.8

ZDF.27

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	51		609	118	INCL			OPP		
1021903		126%	64		516	100	INCL			ENG		
1010003		132%	67		310	60	INCL			ENG		
1029003		180%	92		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	78		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

S6-70/6.8+GV70/5.71

ZDF.28

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	51	61	609	118	INCL			OPP		
1021903		126%	64	77	516	100	INCL			ENG		
1010003		132%	67	81	310	60	INCL			ENG		
1029003		180%	92	110	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	78	93	310	60	INCL	ROTATED OUTPUT		ENG		

S6-80/6.90

ZDF.29

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	52		609	118	INCL			OPP		
1021903		126%	66		516	100	INCL			ENG		
1010003		132%	69		310	60	INCL			ENG		
1029003		180%	93		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	80		310	60	INCL	ROTATED OUTPUT		ENG		

S6-66/7.36-1.0

ZDF.30

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	52		609	118	INCL			OPP		
1021903		126%	66		516	100	INCL			ENG		
1010003		132%	69		310	60	INCL			ENG		
1029003		180%	93		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	80		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

S5-35/6.75

ZDF.31

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1023203		100%	52		444	86	INCL			OPP		
1011103		132%	69		310	60	INCL			ENG		

S6-65/7.97+GV80/6.70

ZDF.32

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	52	62	609	118	INCL			OPP		
1021903		126%	66	78	516	100	INCL			ENG		
1010003		132%	69	82	310	60	INCL			ENG		
1029003		180%	93	112	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	80	95	310	60	INCL	ROTATED OUTPUT		ENG		

6AS1000 TO/6.75 - 0.78 6AS800 TO/6.58 - 0.78 6S1000 TO/6.75 - 0.78 6S800 TO/6.58-0.78(VOLVO ZTO 1006)

ZDF.33

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	53		609	118	INCL			OPP		
1021903		126%	67		516	100	INCL			ENG		
1010003		132%	70		310	60	INCL			ENG		
1029003		180%	95		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	81		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

S5-30/8.00

ZDF.34

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
105203		105%	53		258	50	INCL	PNEUMATIC		OPP		
107503		105%	53		258	50	INCL	MECHANIC		OPP		

6S1200 TD/7.72 - 1.00 S6-80/7.67

ZDF.35

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	54		609	118	INCL			OPP		
1021903		126%	68		516	100	INCL			ENG		
1010003		132%	71		310	60	INCL			ENG		
1029003		180%	97		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	83		310	60	INCL	ROTATED OUTPUT		ENG		

S6-80/7.67+GV80/6.7

ZDF.36

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	54	62	609	118	INCL			OPP		
1021903		126%	68	78	516	100	INCL			ENG		
1010003		132%	71	82	310	60	INCL			ENG		
1029003		180%	97	112	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	83	95	310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

S5-50/6.20

ZDF.37

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	55		609	118	INCL			OPP		
1021903		126%	69		516	100	INCL			ENG		
1010003		132%	73		310	60	INCL			ENG		
1029003		180%	99		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	84		310	60	INCL	ROTATED OUTPUT		ENG		

S5-35/6.45

ZDF.38

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1023203		100%	55		444	86	INCL			OPP		
1011103		132%	73		310	60	INCL			ENG		

S6-80/7.35

ZDF.39

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	55		609	118	INCL			OPP		
1021903		126%	69		516	100	INCL			ENG		
1010003		132%	73		310	60	INCL			ENG		
1029003		180%	99		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	84		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

S6-75/6.70+GV80/7.52

ZDF.40

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	55	62	609	118	INCL			OPP		
1021903		126%	69	78	516	100	INCL			ENG		
1010003		132%	73	82	310	60	INCL			ENG		
1029003		180%	99	112	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	84	95	310	60	INCL	ROTATED OUTPUT		ENG		

S6-65/7.52 S6-80/7.53

ZDF.41

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	56		609	118	INCL			OPP		
1021903		126%	71		516	100	INCL			ENG		
1010003		132%	74		310	60	INCL			ENG		
1029003		180%	100		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	86		310	60	INCL	ROTATED OUTPUT		ENG		

S6-80/5.66+GV80/7.52

ZDF.42

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	56	74	609	118	INCL			OPP		
1021903		126%	71	93	516	100	INCL			ENG		
1010003		132%	74	98	310	60	INCL			ENG		
1029003		180%	100	133	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	86	113	310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

S6-65/7.40

ZDF.43

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	56		609	118	INCL			OPP		
1021903		126%	71		516	100	INCL			ENG		
1010003		132%	74		310	60	INCL			ENG		
1029003		180%	100		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	86		310	60	INCL	ROTATED OUTPUT		ENG		

S6-80/7.41

ZDF.44

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	56		609	118	INCL			OPP		
1021903		126%	71		516	100	INCL			ENG		
1010003		132%	74		310	60	INCL			ENG		
1029003		180%	100		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	86		310	60	INCL	ROTATED OUTPUT		ENG		

6AS700/6.02-0.79 6S700/6.02-0.79

ZDF.45

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	57		435	84	INCL			OPP		
1027203		126%	72		435	84	INCL			ENG		
109903		132%	75		310	60	INCL			ENG		
1030903		180%	103		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	87		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

S6-90/7.40

ZDF.46

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	57		609	118	INCL			OPP		
1021903		126%	72		516	100	INCL			ENG		
1010003		132%	75		310	60	INCL			ENG		
1029003		180%	103		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	87		310	60	INCL	ROTATED OUTPUT		ENG		

S5-30/7.31

ZDF.47

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
105203		105%	58		258	50	INCL	PNEUMATIC		OPP		
107503		105%	58		258	50	INCL	MECHANIC		OPP		

S6-36/6.06

ZDF.48

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	58		435	84	INCL			OPP		
1027203		126%	73		435	84	INCL			ENG		
109903		132%	77		310	60	INCL			ENG		
1030903		180%	105		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	89		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

S6-90/7.03+GV90/5.74

ZDF.49

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	60	74	609	118	INCL			OPP		
1021903		126%	76	93	516	100	INCL			ENG		
1010003		132%	79	98	310	60	INCL			ENG		
1029003		180%	108	133	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	92	113	310	60	INCL	ROTATED OUTPUT		ENG		

S6-90/7.03

ZDF.50

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	60		609	118	INCL			OPP		
1021903		126%	76		516	100	INCL			ENG		
1010003		132%	79		310	60	INCL			ENG		
1029003		180%	108		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	92		310	60	INCL	ROTATED OUTPUT		ENG		

S6-90/7.03+GV90/5.67

ZDF.51

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	60	75	609	118	INCL			OPP		
1021903		126%	76	94	516	100	INCL			ENG		
1010003		132%	79	99	310	60	INCL			ENG		
1029003		180%	108	135	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	92	115	310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

9S75/13.16

ZDF.52

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	61		609	118	8028733		1011204	OPP		
1021903		126%	77		516	100	8040033		1011204	ENG		
1010003		132%	81		310	60	8011833		1011204	ENG		
1029003		180%	110		361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	1011204	ENG		
1026003		153%	93		310	60	8038733	ROTATED OUTPUT	1011204	ENG		

S6-90/6.98

ZDF.53

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	61		609	118	INCL			OPP		
1021903		126%	77		516	100	INCL			ENG		
1010003		132%	81		310	60	INCL			ENG		
1029003		180%	110		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	93		310	60	INCL	ROTATED OUTPUT		ENG		

S5-50/5.50

ZDF.54

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	62		609	118	INCL			OPP		
1021903		126%	78		516	100	INCL			ENG		
1010003		132%	82		310	60	INCL			ENG		
1029003		180%	112		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	95		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

6S1200 TO/6.75 - 0.83 S6-65/6.70, S6-80/6.7

ZDF.55

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	62		609	118	INCL			OPP		
1021903		126%	78		516	100	INCL			ENG		
1010003		132%	82		310	60	INCL			ENG		
1029003		180%	112		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	95		310	60	INCL	ROTATED OUTPUT		ENG		

S6-80/6.7+GV80/5.30

ZDF.56

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	62	79	609	118	INCL			OPP		
1021903		126%	78	100	516	100	INCL			ENG		
1010003		132%	82	104	310	60	INCL			ENG		
1029003		180%	112	142	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	95	121	310	60	INCL	ROTATED OUTPUT		ENG		

S5-35/5.64

ZDF.57

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1023203		100%	63		444	86	INCL			OPP		
1011103		132%	83		310	60	INCL			ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

S6-65/6.37

ZDF.58

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	65		609	118	INCL			OPP		
1021903		126%	82		516	100	INCL			ENG		
1010003		132%	86		310	60	INCL			ENG		
1029003		180%	117		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	99		310	60	INCL	ROTATED OUTPUT		ENG		

S5-50/5.30

ZDF.59

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	65		609	118	INCL			OPP		
1021903		126%	82		516	100	INCL			ENG		
1010003		132%	86		310	60	INCL			ENG		
1029003		180%	117		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	99		310	60	INCL	ROTATED OUTPUT		ENG		

6S-300

ZDF.60

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015503		176%	118		184	36	INCL	MECHANIC		OPP		
1018303		176%	118		184	36	INCL	PNEUMATIC		OPP		

For complete part numbers, consult the PTO Series section (page 25)

6S-350 VD

ZDF.61

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1019303		176%	118		184	36	INCL	MECHANIC		OPP		
1019403		176%	118		184	36	INCL	PNEUMATIC		OPP		


S5-35/6.79

ZDF.62

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1023203		100%	67		444	86	INCL			OPP		
1011103		132%	88		310	60	INCL			ENG		

2840.6 6S-380 VO 6S-400

ZDF.63

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1019903		182%	68		184	36	INCL	MECHANIC		OPP		
1020003		182%	68		184	36	INCL	PNEUMATIC		OPP		
1020703		182%	68		184	36	INCL	MECHANIC		OPP		
1021203		182%	68		184	36	INCL	PNEUMATIC		OPP		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

S6-80/6.10

ZDF.64

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	69		609	118	INCL			OPP		
1021903		126%	87		516	100	INCL			ENG		
1010003		132%	91		310	60	INCL			ENG		
1029003		180%	125		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	106		310	60	INCL	ROTATED OUTPUT		ENG		

16AS2200/15.89-1.0 IT

ZDF.65

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	71		609	118	8028933		1018104	OPP		
1021903		126%	89		516	100	8039033		1018104	ENG		
1010003		132%	94		310	60	8011933		1018104	ENG		
1029003		180%	128		361	70	8047133	HEAVY DUTY, ROTATED OUTPUT	1018104	ENG		
1026003		153%	109		310	60	8038933	ROTATED OUTPUT	1018104	ENG		

9S109/12.91 **9S1110 TD/12.73**

ZDF.66

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	72		609	118	8028733		1011304	OPP		
1021903		126%	91		516	100	8040033		1011304	ENG		
1010003		132%	95		310	60	8011833		1011304	ENG		
1029003		180%	130		361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	1011304	ENG		
1026003		153%	110		310	60	8038733	ROTATED OUTPUT	1011304	ENG		

For complete part numbers, consult the PTO Series section (page 25)

9S109/12.92

ZDF.67

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	72		609	118	8028733		103604	OPP		
1021903		126%	91		516	100	8040033		103604	ENG		
1010003		132%	95		310	60	8011833		103604	ENG		
1029003		180%	130		361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	103604	ENG		
1026003		153%	110		310	60	8038733	ROTATED OUTPUT	103604	ENG		

S6-80/5.66 S6-90/5.74 S6-90/6.37

ZDF.68

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	74		609	118	INCL			OPP		
1021903		126%	93		516	100	INCL			ENG		
1010003		132%	98		310	60	INCL			ENG		
1029003		180%	133		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	113		310	60	INCL	ROTATED OUTPUT		ENG		

16S160A/17.47 (TRILOBE) 16S190A/17.47 (TRILOBE)

ZDF.69

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	74	91	609	118	INCL		1010404	OPP		
1021903		126%	93	115	516	100	INCL		1010404	ENG		
1010003		132%	98	120	310	60	INCL		1010404	ENG		
1029003		180%	133	164	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1010404	ENG		
1026003		153%	113	139	310	60	INCL	ROTATED OUTPUT	1010404	ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

16S130/14.29 (TRILOBE) 16S130/17.06 (TRILOBE) 16S130/17.47 (TRILOBE) ZDF.70

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	74	91	609	118	INCL		103304	OPP		
1021903		126%	93	115	516	100	INCL		103304	ENG		
1010003		132%	98	120	310	60	INCL		103304	ENG		
1029003		180%	133	164	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103304	ENG		
1026003		153%	113	139	310	60	INCL	ROTATED OUTPUT	103304	ENG		

16S160/14.29 (TRILOBE) 16S160/17.06 (TRILOBE) ZDF.71

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	74	91	609	118	INCL		103404	OPP		
1021903		126%	93	115	516	100	INCL		103404	ENG		
1010003		132%	98	120	310	60	INCL		103404	ENG		
1029003		180%	133	164	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103404	ENG		
1026003		153%	113	139	310	60	INCL	ROTATED OUTPUT	103404	ENG		

16S109/13.31 ZDF.72

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	75	90	609	118	8028733		1011304	OPP		
1021903		126%	95	113	516	100	8040033		1011304	ENG		
1010003		132%	99	119	310	60	8011833		1011304	ENG		
1029003		180%	135	162	361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	1011304	ENG		
1026003		153%	115	138	310	60	8038733	ROTATED OUTPUT	1011304	ENG		

For complete part numbers, consult the PTO Series section (page 25)

S6-90/5.67

ZDF.73

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	75		609	118	INCL			OPP		
1021903		126%	94		516	100	INCL			ENG		
1010003		132%	99		310	60	INCL			ENG		
1029003		180%	135		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	115		310	60	INCL	ROTATED OUTPUT		ENG		


16S109/11.86

ZDF.74

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	75	88	609	118	8028733		103504	OPP		
1021903		126%	95	111	516	100	8040033		103504	ENG		
1010003		132%	99	116	310	60	8011833		103504	ENG		
1029003		180%	135	158	361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	103504	ENG		
1026003		153%	115	135	310	60	8038733	ROTATED OUTPUT	103504	ENG		

5S-270 VO

ZDF.75

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1019503		173%	130		125	36	INCL	MECHANIC		OPP		
1019703		173%	130		125	36	INCL	PNEUMATIC		OPP		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

12AS1800/14.89-1.0 IT 16AS2230 TD/17.03-1.0 16AS2231 TD/17.03-1.0 IT 16AS2601 TD/17.03-1.0 IT ZDF.76

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	76		609	118	8028933		1018104	OPP		
1021903		126%	96		516	100	8039033		1018104	ENG		
1010003		132%	100		310	60	8011933		1018104	ENG		
1029003		180%	137		361	70	8047133	HEAVY DUTY, ROTATED OUTPUT	1018104	ENG		
1026003		153%	116		310	60	8038933	ROTATED OUTPUT	1018104	ENG		

16S1620 TD/16.41-1.0 16S2220 TD/16.41-1.0 16S2330 TD/16.41-1.0 16S1920 TD/16.41-1.0 16S2320 TD/16.41-1.0 ZDF.77

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	91	609	118	INCL		1012704	OPP		
1021903		126%	97	115	516	100	INCL		1012704	ENG		
1010003		132%	102	120	310	60	INCL		1012704	ENG		
1029003		180%	138	164	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1012704	ENG		
1026003		153%	118	139	310	60	INCL	ROTATED OUTPUT	1012704	ENG		

16S1621 TD/16.41-1.0 IT 16S2221 TD/16.41-1.0 16S2321 TD/16.41-1.0 IT 16S1921 TD/16.41-1.0 IT IT 16S2331 TD/16.41-1.0 IT ZDF.78

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	91	609	118	8028433		1013004	OPP		
1021903		126%	97	115	516	100	8036633		1013004	ENG		
1010003		132%	102	120	310	60	8011633		1013004	ENG		
1029003		180%	138	164	361	70	8047733	HEAVY DUTY, ROTATED OUTPUT	1013004	ENG		
1026003		153%	118	139	310	60	8038833	ROTATED OUTPUT	1013004	ENG		

For complete part numbers, consult the PTO Series section (page 25)

16S151/13.80IT (TRILOBE) 16S220/13.80IT (TRILOBE) 16S221/13.80IT (TRILOBE)

ZDF.79

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	92	609	118	INCL		1010304	OPP		
1021903		126%	97	116	516	100	INCL		1010304	ENG		
1010003		132%	102	121	310	60	INCL		1010304	ENG		
1029003		180%	138	165	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1010304	ENG		
1026003		153%	118	141	310	60	INCL	ROTATED OUTPUT	1010304	ENG		

16S151/13.85-0.84 (TRILOBE) 16S221/13.85-0.84 (TRILOBE)
16S151/16.53-1.0 (TRILOBE) 16S221/16.53-1.0 (TRILOBE)

ZDF.80

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	92	609	118	INCL		1011004	OPP		
1021903		126%	97	116	516	100	INCL		1011004	ENG		
1010003		132%	102	121	310	60	INCL		1011004	ENG		
1029003		180%	138	165	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1011004	ENG		
1026003		153%	118	141	310	60	INCL	ROTATED OUTPUT	1011004	ENG		

16S151/13.85-0.84 16S181/13.85-0.84 16S221/13.85-0.84
16S151/16.53-1.0 16S181/16.53-1.0 16S221/16.53-1.0

ZDF.81

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	92	609	118	INCL		1012704	OPP		
1021903		126%	97	116	516	100	INCL		1012704	ENG		
1010003		132%	102	121	310	60	INCL		1012704	ENG		
1029003		180%	138	165	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1012704	ENG		
1026003		153%	118	141	310	60	INCL	ROTATED OUTPUT	1012704	ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

16S151/13.80IT **16S151/16.47IT** **16S181/13.85IT** **16S181/16.53IT** **16S221/16.41IT**
16S151/13.85IT **16S151/16.53IT** **16S181/16.41IT** **16S221/13.80IT** **16S221/16.47IT**
16S151/16.41IT **16S181/13.80IT** **16S181/16.47IT** **16S221/13.85IT** **16S221/16.53IT**

ZDF.82

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	92	609	118	8028433		1013004	OPP		
1021903		126%	97	116	516	100	8036633		1013004	ENG		
1010003		132%	102	121	310	60	8011633		1013004	ENG		
1029003		180%	138	165	361	70	8047733	HEAVY DUTY, ROTATED OUTPUT	1013004	ENG		
1026003		153%	118	141	310	60	8038833	ROTATED OUTPUT	1013004	ENG		

16S251IT

ZDF.83

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	92	609	118	8028433		1014504	OPP		
1021903		126%	97	116	516	100	8036633		1014504	ENG		
1010003		132%	102	121	310	60	8011633		1014504	ENG		
1029003		180%	138	165	361	70	8047733	HEAVY DUTY, ROTATED OUTPUT	1014504	ENG		
1026003		153%	118	141	310	60	8038833	ROTATED OUTPUT	1014504	ENG		

16S130/13.80 (TRILOBE) **16S130/14.14 (TRILOBE)** **16S130/16.47 (TRILOBE)**

ZDF.84

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	92	609	118	INCL		103304	OPP		
1021903		126%	97	116	516	100	INCL		103304	ENG		
1010003		132%	102	121	310	60	INCL		103304	ENG		
1029003		180%	138	165	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103304	ENG		
1026003		153%	118	141	310	60	INCL	ROTATED OUTPUT	103304	ENG		

For complete part numbers, consult the PTO Series section (page 25)

9S109/10.24 9S109/10.25 ZDF.85

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77		609	118	8028733		103504	OPP		
1021903		126%	97		516	100	8040033		103504	ENG		
1010003		132%	102		310	60	8011833		103504	ENG		
1029003		180%	138		361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	103504	ENG		
1026003		153%	118		310	60	8038733	ROTATED OUTPUT	103504	ENG		

16S160A/14.14 (TRILOBE) 16S220A/14.14 (TRILOBE) ZDF.86

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	92	609	118	INCL		1010404	OPP		
1021903		126%	97	116	516	100	INCL		1010404	ENG		
1010003		132%	102	121	310	60	INCL		1010404	ENG		
1029003		180%	138	165	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1010404	ENG		
1026003		153%	118	141	310	60	INCL	ROTATED OUTPUT	1010404	ENG		

16S150/16.47/13.80 (TRILOBE) ZDF.87

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	77	92	609	118	INCL		1010904	OPP		
1021903		126%	97	116	516	100	INCL		1010904	ENG		
1010003		132%	102	121	310	60	INCL		1010904	ENG		
1029003		180%	138	165	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1010904	ENG		
1026003		153%	118	141	310	60	INCL	ROTATED OUTPUT	1010904	ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

S6-80/5.03

ZDF.88

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	78		609	118	INCL			OPP		
1021903		126%	98		516	100	INCL			ENG		
1010003		132%	103		310	60	INCL			ENG		
1029003		180%	140		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	119		310	60	INCL	ROTATED OUTPUT		ENG		

12AS1420TD

ZDF.89

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	79	98	609	118	8028733		1021604	OPP		
1021903		126%	100	123	516	100	8040033		1021604	ENG		
1010003		132%	104	129	310	60	8011833		1021604	ENG		
1029003		180%	142	177	361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	1021604	ENG		
1026003		153%	121	150	310	60	8038733	ROTATED OUTPUT	1021604	ENG		

16S109/13.53

ZDF.90

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	79	93	609	118	8028733		103504	OPP		
1021903		126%	100	117	516	100	8040033		103504	ENG		
1010003		132%	104	123	310	60	8011833		103504	ENG		
1029003		180%	142	167	361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	103504	ENG		
1026003		153%	121	142	310	60	8038733	ROTATED OUTPUT	103504	ENG		

For complete part numbers, consult the PTO Series section (page 25)

16S109/13.30 **16S109/13.42**

ZDF.91

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	79	93	609	118	8028733		103604	OPP		
1021903		126%	100	117	516	100	8040033		103604	ENG		
1010003		132%	104	123	310	60	8011833		103604	ENG		
1029003		180%	142	167	361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	103604	ENG		
1026003		153%	121	142	310	60	8038733	ROTATED OUTPUT	103604	ENG		


4-120GP/10.91

ZDF.92

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	80		609	118	INCL		102904	OPP		
1021903		126%	101		516	100	INCL		102904	ENG		
1010003		132%	106		310	60	INCL		102904	ENG		
1029003		180%	144		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	102904	ENG		
1026003		153%	122		310	60	INCL	ROTATED OUTPUT	102904	ENG		

S5-42/4.65

ZDF.93

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)			250	49	INCL	ENGLAND	GA6032	OPP	52	
		C (73)		60	250	49	INCL	ENGLAND	GA6032	OPP	52	
		E (86)		71	225	44	INCL	ENGLAND	GA6032	OPP	52	
		J (95)		78	225	44	INCL	ENGLAND	GA6032	OPP	52	
		O (125)		103	200	39	INCL	ENGLAND	GA6032	OPP	52	
		R (137)		113	200	39	INCL	ENGLAND	GA6032	OPP	52	
		S (150)		124	190	37	INCL	ENGLAND	GA6032	OPP	52	
		T (165)		136	175	34	INCL	ENGLAND	GA6032	OPP	52	

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

12S2100 TD/15.57-1.0 12S2300 TD/15.57-1.0 12S2800 TD/15.57-1.0

ZDF.94

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	81	103	609	118	INCL		1012704	OPP		
1021903		126%	102	130	516	100	INCL		1012704	ENG		
1010003		132%	107	136	310	60	INCL		1012704	ENG		
1029003		180%	145	185	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1012704	ENG		
1026003		153%	124	158	310	60	INCL	ROTATED OUTPUT	1012704	ENG		

12S2101 TD/15.57-1.0 IT3 12S2301 TD/15.57-1.0 IT3 12S2801 TD/15.57-1.0 IT3

ZDF.95

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	81	103	609	118	8028433		1013004	OPP		
1021903		126%	102	130	516	100	8036633		1013004	ENG		
1010003		132%	107	136	310	60	8011633		1013004	ENG		
1029003		180%	145	185	361	70	8047733	HEAVY DUTY, ROTATED OUTPUT	1013004	ENG		
1026003		153%	124	158	310	60	8038833	ROTATED OUTPUT	1013004	ENG		

12AS2531 TO/15.86- 1.0

ZDF.96

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82		609	118	8028933		1025404	OPP		
1021903		126%	103		516	100	8039033		1025404	ENG		
1010003		132%	108		310	60	8011933		1025404	ENG		
1029003		180%	148		361	70	8047133	HEAVY DUTY, ROTATED OUTPUT	1025404	ENG		
1026003		153%	125		310	60	8038933	ROTATED OUTPUT	1025404	ENG		

For complete part numbers, consult the PTO Series section (page 25)

ZF

ZDF.97

12AS1630 TD/15.86-1.0
12AS1631 TD/15.86-1.0 IT
12AS1930 TD/15.86-1.0
12AS1931 TD/15.86-1.0 IT
12AS2130 TD/15.86-1.0
12AS2131 TD/15.86-1.0 IT
12AS2140 TD/15.86-1.0
12AS2141 TD/15.86-1.0 IT
12AS2301 TD/15.86-1.0 IT
12AS2340 TD/15.86-1.0
12AS2341 TD/15.86-1.0 IT
12AS2430 TD/15.86-1.0
12AS2431 TD/15.86-1.0 IT
12AS2540 TD/15.86-1.0

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82		609	118	8028933		1018104	OPP		
1021903		126%	103		516	100	8039033		1018104	ENG		
1010003		132%	108		310	60	8011933		1018104	ENG		
1029003		180%	148		361	70	8047133	HEAVY DUTY, ROTATED OUTPUT	1018104	ENG		
1026003		153%	125		310	60	8038933	ROTATED OUTPUT	1018104	ENG		

ZDF.98

16S130/11.46 (TRILOBE)
16S130/11.74 (TRILOBE)
16S130/13.68 (TRILOBE)

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82	97	609	118	INCL		103304	OPP		
1021903		126%	103	122	516	100	INCL		103304	ENG		
1010003		132%	108	128	310	60	INCL		103304	ENG		
1029003		180%	148	175	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103304	ENG		
1026003		153%	125	148	310	60	INCL	ROTATED OUTPUT	103304	ENG		

ZDF.99

4-150GP/9.19
5-111GP/13.04

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82		609	118	INCL		103004	OPP		
1021903		126%	103		516	100	INCL		103004	ENG		
1010003		132%	108		310	60	INCL		103004	ENG		
1029003		180%	148		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103004	ENG		
1026003		153%	125		310	60	INCL	ROTATED OUTPUT	103004	ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

16S190/11.46 (TRILOBE)

ZDF.100

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82	96	609	118	INCL		103404	OPP		
1021903		126%	103	121	516	100	INCL		103404	ENG		
1010003		132%	108	127	310	60	INCL		103404	ENG		
1029003		180%	148	173	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103404	ENG		
1026003		153%	125	147	310	60	INCL	ROTATED OUTPUT	103404	ENG		

16S160A/11.74 (TRILOBE)

ZDF.101

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82	96	609	118	INCL		1010404	OPP		
1021903		126%	103	121	516	100	INCL		1010404	ENG		
1010003		132%	108	127	310	60	INCL		1010404	ENG		
1029003		180%	148	173	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1010404	ENG		
1026003		153%	125	147	310	60	INCL	ROTATED OUTPUT	1010404	ENG		

16S112/11.46 (TRILOBE) 16S112/13.68 (TRILOBE)

ZDF.102

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82	96	609	118	INCL		103204	OPP		
1021903		126%	103	121	516	100	INCL		103204	ENG		
1010003		132%	108	127	310	60	INCL		103204	ENG		
1029003		180%	148	173	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103204	ENG		
1026003		153%	125	147	310	60	INCL	ROTATED OUTPUT	103204	ENG		

For complete part numbers, consult the PTO Series section (page 25)

16S160/11.46 (TRILOBE)
16S160/13.68 (TRILOBE)
16S190/13.68 (TRILOBE)
16S220/13.80 (TRILOBE)
16S220/16.47 (TRILOBE)

ZDF.103

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82	96	609	118	INCL		103404	OPP		
1021903		126%	103	121	516	100	INCL		103404	ENG		
1010003		132%	108	127	310	60	INCL		103404	ENG		
1029003		180%	148	173	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103404	ENG		
1026003		153%	125	147	310	60	INCL	ROTATED OUTPUT	103404	ENG		

16S190A/11.74 (TRILOBE)

ZDF.104

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	82	97	609	118	INCL		1010404	OPP		
1021903		126%	103	122	516	100	INCL		1010404	ENG		
1010003		132%	108	128	310	60	INCL		1010404	ENG		
1029003		180%	148	175	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1010404	ENG		
1026003		153%	125	148	310	60	INCL	ROTATED OUTPUT	1010404	ENG		

5-110GPA

ZDF.105

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	83		609	118	INCL		103104	OPP		
1021903		126%	105		516	100	INCL		103104	ENG		
1010003		132%	110		310	60	INCL		103104	ENG		
1029003		180%	150		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103104	ENG		
1026003		153%	127		310	60	INCL	ROTATED OUTPUT	103104	ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

5-110GP/13.1 **5-110GP/9.72**

ZDF.106

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	83		609	118	INCL		103004	OPP		
1021903		126%	105		516	100	INCL		103004	ENG		
1010003		132%	110		310	60	INCL		103004	ENG		
1029003		180%	150		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103004	ENG		
1026003		153%	127		310	60	INCL	ROTATED OUTPUT	103004	ENG		

9S75/9.56

ZDF.107

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	85		609	118	8028733		1011204	OPP		
1021903		126%	107		516	100	8040033		1011204	ENG		
1010003		132%	112		310	60	8011833		1011204	ENG		
1029003		180%	153		361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	1011204	ENG		
1026003		153%	130		310	60	8038733	ROTATED OUTPUT	1011204	ENG		

4-120GP/9.16

ZDF.108

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	85		609	118	INCL		102904	OPP		
1021903		126%	107		516	100	INCL		102904	ENG		
1010003		132%	112		310	60	INCL		102904	ENG		
1029003		180%	153		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	102904	ENG		
1026003		153%	130		310	60	INCL	ROTATED OUTPUT	102904	ENG		

For complete part numbers, consult the PTO Series section (page 25)

S5-24/6.40

ZDF.109

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
105003		105%	90		258	50	INCL	PNEUMATIC		OPP		
106903		105%	90		258	50	INCL	MECHANIC		OPP		

S5-24/6.34

ZDF.110

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
105003		105%	90		258	50	INCL	PNEUMATIC		OPP		
106903		105%	90		258	50	INCL	MECHANIC		OPP		

S5-90GPA

ZDF.111

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	89		609	118	INCL			OPP		
1021903		126%	112		516	100	INCL			ENG		
1010003		132%	117		310	60	INCL			ENG		
1029003		180%	160		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	136		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

5-90GP/13 **5-90GP/13.01**

ZDF.112

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	89		609	118	INCL		102904	OPP		
1021903		126%	112		516	100	INCL		102904	ENG		
1010003		132%	117		310	60	INCL		102904	ENG		
1029003		180%	160		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	102904	ENG		
1026003		153%	136		310	60	INCL	ROTATED OUTPUT	102904	ENG		

8S1620 TD/13.80-1.0

ZDF.113

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	91		609	118	INCL		1012704	OPP		
1021903		126%	115		516	100	INCL		1012704	ENG		
1010003		132%	120		310	60	INCL		1012704	ENG		
1029003		180%	164		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1012704	ENG		
1026003		153%	139		310	60	INCL	ROTATED OUTPUT	1012704	ENG		

16S1820 TO/13.80-0.84 **16S2520 TO/13.80-0.84** **16S2730 TO/13.80-0.84**
16S2220 TO/13.80-0.84 **16S2720 TO/13.80-0.84**

ZDF.114

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	91	109	609	118	INCL		1012704	OPP		
1021903		126%	115	137	516	100	INCL		1012704	ENG		
1010003		132%	120	144	310	60	INCL		1012704	ENG		
1029003		180%	164	196	361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1012704	ENG		
1026003		153%	139	167	310	60	INCL	ROTATED OUTPUT	1012704	ENG		

For complete part numbers, consult the PTO Series section (page 25)

16S1821 TO/13.80-0.84 IT
16S2221 TO/13.80-0.84 IT
16S2521 TO/13.80-0.84 IT
16S2721 TO/13.80-0.84 IT
16S2731 TO/13.80-0.84 IT

ZDF.115

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	91	109	609	118	8028433		1013004	OPP		
1021903		126%	115	137	516	100	8036633		1013004	ENG		
1010003		132%	120	144	310	60	8011633		1013004	ENG		
1029003		180%	164	196	361	70	8047733	HEAVY DUTY, ROTATED OUTPUT	1013004	ENG		
1026003		153%	139	167	310	60	8038833	ROTATED OUTPUT	1013004	ENG		

16S2720 TO/13.80-0.84 IT + WSK

ZDF.116

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	91	109	609	118	8028433		1014504	OPP		
1021903		126%	115	137	516	100	8036633		1014504	ENG		
1010003		132%	120	144	310	60	8011633		1014504	ENG		
1029003		180%	164	196	361	70	8047733	HEAVY DUTY, ROTATED OUTPUT	1014504	ENG		
1026003		153%	139	167	310	60	8038833	ROTATED OUTPUT	1014504	ENG		

8S151/13.79

ZDF.117

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	92		609	118	INCL		1012704	OPP		
1021903		126%	116		516	100	INCL		1012704	ENG		
1010003		132%	121		310	60	INCL		1012704	ENG		
1029003		180%	165		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1012704	ENG		
1026003		153%	141		310	60	INCL	ROTATED OUTPUT	1012704	ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

9S1110 TO/9.48-0.75 (VOLVO ZTO 1109) **9S1310 TO/9.48**

ZDF.118

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	97		609	118	8028733		1011304	OPP		
1021903		126%	122		516	100	8040033		1011304	ENG		
1010003		132%	128		310	60	8011833		1011304	ENG		
1029003		180%	175		361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	1011304	ENG		
1026003		153%	148		310	60	8038733	ROTATED OUTPUT	1011304	ENG		

4-120GP/8.05

ZDF.119

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	97		609	118	INCL		102904	OPP		
1021903		126%	122		516	100	INCL		102904	ENG		
1010003		132%	128		310	60	INCL		102904	ENG		
1029003		180%	175		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	102904	ENG		
1026003		153%	148		310	60	INCL	ROTATED OUTPUT	102904	ENG		

5-110GP/11.2 **5-110GP/8.20**

ZDF.120

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	98		609	118	INCL		103004	OPP		
1021903		126%	123		516	100	INCL		103004	ENG		
1010003		132%	129		310	60	INCL		103004	ENG		
1029003		180%	177		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	103004	ENG		
1026003		153%	150		310	60	INCL	ROTATED OUTPUT	103004	ENG		

For complete part numbers, consult the PTO Series section (page 25)

12AS1010TO 12AS1210TO

ZDF.121

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	98	120	609	118	8028733		1020804	OPP		
1021903		126%	123	151	516	100	8040033		1020804	ENG		
1010003		132%	129	158	310	60	8011833		1020804	ENG		
1029003		180%	177	216	361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	1020804	ENG		
1026003		153%	150	184	310	60	8038733	ROTATED OUTPUT	1020804	ENG		

12AS1420TO 12AS1620TO

ZDF.122

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	98	120	609	118	8028733		1021604	OPP		
1021903		126%	123	151	516	100	8040033		1021604	ENG		
1010003		132%	129	158	310	60	8011833		1021604	ENG		
1029003		180%	177	216	361	70	8047633	HEAVY DUTY, ROTATED OUTPUT	1021604	ENG		
1026003		153%	150	184	310	60	8038733	ROTATED OUTPUT	1021604	ENG		

S5-42/6.56

ZDF.123

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
104703		136%	100		310	60	INCL			OPP		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

8S1820 TO/11.54-0.84 8S220 TO/11.54-0.84

ZDF.124

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	109		609	118	INCL		1012704	OPP		
1021903		126%	137		516	100	INCL		1012704	ENG		
1010003		132%	144		310	60	INCL		1012704	ENG		
1029003		180%	196		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT	1012704	ENG		
1026003		153%	167		310	60	INCL	ROTATED OUTPUT	1012704	ENG		

16AS2601 TO/14.12-0.83 16AS2630 TO/14.12-0.83 16AS2631 TO/14.12-0.83 IT

ZDF.125

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	111		609	118	8028933		1018104	OPP		
1021903		126%	140		516	100	8039033		1018104	ENG		
1010003		132%	147		310	60	8011933		1018104	ENG		
1029003		180%	200		361	70	8047133	HEAVY DUTY, ROTATED OUTPUT	1018104	ENG		
1026003		153%	170		310	60	8038933	ROTATED OUTPUT	1018104	ENG		

S5-42/7.55

ZDF.126

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
104603		139%	100		310	60	INCL			OPP		

For complete part numbers, consult the PTO Series section (page 25)

ZDF.127

12AS1930 TO/12.33-0.78
12AS1931 TO/12.33-0.78 IT
12AS2130 TO/12.33-0.78
12AS2131 TO/12.33-0.78 IT
12AS2301 TO/12.33-0.78 IT
12AS2330 TO/12.33-0.78
12AS2331 TO/12.33-0.78 IT
12AS2530 TO/12.33-0.78
12AS2531 TO/12.33-0.78 IT
12AS2540 TO/12.29-0.78
12AS2541 TO/12.29-0.78 IT
12AS2740 TO/12.29-0.78
12AS2741 TO/12.29-0.78 IT
12AS2940 TO/12.29-0.78
12AS2941 TO/12.29-0.78 IT

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	135		609	118	8028933		1018104	OPP		
1021903		126%	170		516	100	8039033		1018104	ENG		
1010003		132%	178		310	60	8011933		1018104	ENG		
1029003		180%	243		361	70	8047133	HEAVY DUTY, ROTATED OUTPUT	1018104	ENG		
1026003		153%	207		310	60	8038933	ROTATED OUTPUT	1018104	ENG		

S6-36/6.93-0.8

ZDF.128

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	51		435	84	INCL			OPP		
1027203		126%	64		435	84	INCL			ENG		
109903		132%	67		310	60	INCL			ENG		
1030903		180%	92		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	78		310	60	INCL	ROTATED OUTPUT		ENG		

S6-80/7.90

ZDF.129

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	52		609	118	INCL			OPP		
1021903		126%	66		516	100	INCL			ENG		
1010003		132%	69		310	60	INCL			ENG		
1029003		180%	93		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026003		153%	80		310	60	INCL	ROTATED OUTPUT		ENG		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com


6S850/6.72-0.79

ZDF.130

4 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1022603		100%	53		435	84	INCL			OPP		
1027203		126%	67		435	84	INCL			ENG		
109903		132%	70		310	60	INCL			ENG		
1030903		180%	95		361	70	INCL	HEAVY DUTY, ROTATED OUTPUT		ENG		
1026603		153%	81		310	60	INCL	ROTATED OUTPUT		ENG		

S5-42/5.72

ZDF.131

6 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1000		B (55)			250	49	INCL	(ZF1,2,3)		OPP	21	
		C (73)		68	250	49	INCL	(ZF1,2,3)		OPP	21	
		E (86)		74	225	44	INCL	(ZF1,2,3)		OPP	21	
		J (95)		88	225	44	INCL	(ZF1,2,3)		OPP	21	
		O (125)		116	200	39	INCL	(ZF1,2,3)		OPP	21	
		R (137)		127	200	39	INCL	(ZF1,2,3)		OPP	21	
		S (150)		139	190	37	INCL	(ZF1,2,3)		OPP	21	
		T (165)		153	175	34	INCL	(ZF1,2,3)		OPP	21	

FOOT NOTES:

ZF1: Direct mount pump size will be limited by cross-member.

ZF2: "Shaft high" assembly arrangement shown for cross-member clearance.

ZF3: PTO housing may encounter exhaust interference and may require modification per Ford recommendations.

ZF4: Use "3" assembly arrangement for direct mount pump. Pump size is limited by cross-member interference.

ZF5: Gas tank may prevent remote mounting of pump on left side.

For complete part numbers, consult the PTO Series section (page 25)

16TX-1640TD/17.94-1.0,
16TX-1840TD/17.94-1.0,
16TX-2040TD/17.94-1.0,
16TX-2240TD/17.94-1.0,
16TX-2440TD/17.94-1.0,
16TX-2640TD/17.94-1.0,
16TX-2840TD/17.94-1.0.

ZDF.132

7 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1015703		100%	72		609	118	INCL		1028804	ENG		
1021903		126%	91		516	100	INCL		1028804	OPP		
1010003		132%	95		310	60	INCL		1028804	OPP		
1029003		180%	130		361	70	INCL	H.DUTY, ROTATED OUTPUT	1028804	OPP		
1026003		153%	110		310	60	INCL	ROTATED OUTPUT	1028804	OPP		

12TX-1410TD/16.69-1.0,
12TX-1610TD/16.69-1.0,
12TX-1810TD/16.69-1.0,
12TX-2010TD/16.69-1.0,
12TX-2210TD/16.69-1.0,
12TX-2420TD/16.69-1.0,
12TX-2620TD/16.69-1.0,
12TX-2820TD/16.69-1.0.

ZDF.133

7 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1015703		100%	76		609	118	INCL		1028804	ENG		
1021903		126%	96		516	100	INCL		1028804	OPP		
1010003		132%	100		310	60	INCL		1028804	OPP		
1029003		180%	137		361	70	INCL	H.DUTY, ROTATED OUTPUT	1028804	OPP		
1026003		153%	116		310	60	INCL	ROTATED OUTPUT	1028804	OPP		

16TX-1840TO/14.68-0.82,
16TX-2040TO/14.68-0.82,
16TX-2240TO/14.68-0.82,
16TX-2440TO/14.68-0.82,
16TX-2640TO/14.68-0.82,
16TX-2840TO/14.68-0.82,
16TX-3040TO/14.68-0.82,
16TX-3240TO/14.68-0.82,
16TX-3440TO/14.68-0.82.

ZDF.134

7 Bolts	PTO Series	% Internal Ratio	Engine % Low	Engine % High	Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
1015703		100%	108		609	118	INCL		1028804	ENG		
1021903		126%	136		516	100	INCL		1028804	OPP		
1010003		132%	143		310	60	INCL		1028804	OPP		
1029003		180%	194		361	70	INCL	H.DUTY, ROTATED OUTPUT	1028804	OPP		
1026003		153%	165		310	60	INCL	ROTATED OUTPUT	1028804	OPP		

For complete part numbers, consult the PTO Series section (page 25)

Pro Gear and Transmission, Inc. | 906 West Gore St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com

bezaresusa

12TX-1610TO/12.92-0.77,
12TX-1810TO/12.92-0.77,
12TX-2010TO/12.92-0.77,
12TX-2210TO/12.92-0.77,
12TX-2410TO/12.92-0.77,
12TX-2610TO/12.92-0.77,
12TX-2820TO/12.92-0.77,
12TX-3020TO/12.92-0.77,
12TX-3220TO/12.92-0.77,
12TX-3420TO/12.92-0.77.

ZDF.135

7 Bolts	PTO Series	% Internal Ratio	Engine %		Max. Torque (Lb.Ft)	Power @1000 rpm (HP)	Stud Kit	Notes	Adapters	PTO Rot.	Input Gear	Assy
			Low	High								
1015703		100%	126		609	118	INCL		1028804	ENG		
1021903		126%	159		516	100	INCL		1028804	OPP		
1010003		132%	166		310	60	INCL		1028804	OPP		
1029003		180%	227		361	70	INCL	H.DUTY, ROTATED OUTPUT	1028804	OPP		
1026003		153%	193		310	60	INCL	ROTATED OUTPUT	1028804	OPP		

For complete part numbers, consult the PTO Series section (page 25)



bezaresusa

pto-usa.com

Bezares USA

27634 Commerce Oaks Drive,
Oak Ridge north, Texas 77385, USA
+1 888 663 1786
pto@bezares.com

995000/2022

PTOs, pumps, valves, powerpacks, oil tanks, winches, wet kits, gearboxes, adapters and accessories.

Pro Gear and Transmission, Inc | 906 West Core St, Orlando, FL 32805
+1 (877) 776-4600 | +1 (407) 872-1901
www.progearandtransmission.com | www.pgttruckparts.com | parts@eprogear.com